



# SMSEagle

## Antenna GSM/UMTS 9dBi

Tech datasheet




## PRODUCT DESCRIPTION

Antenna GSM/UMTS Quad-band 9dBi suitable for places with low GSM/3G signal reception.

## SPECIFICATION

Frequency range:	900/1800/1900/2100 MHz
Radiation:	H-360°, V-30°
Polarization:	Vertical
Gain:	9 dBi
VSWR:	< 1.8 : 1
Impedance:	50 Ω
Power handling:	30 W max.

## DRAWING

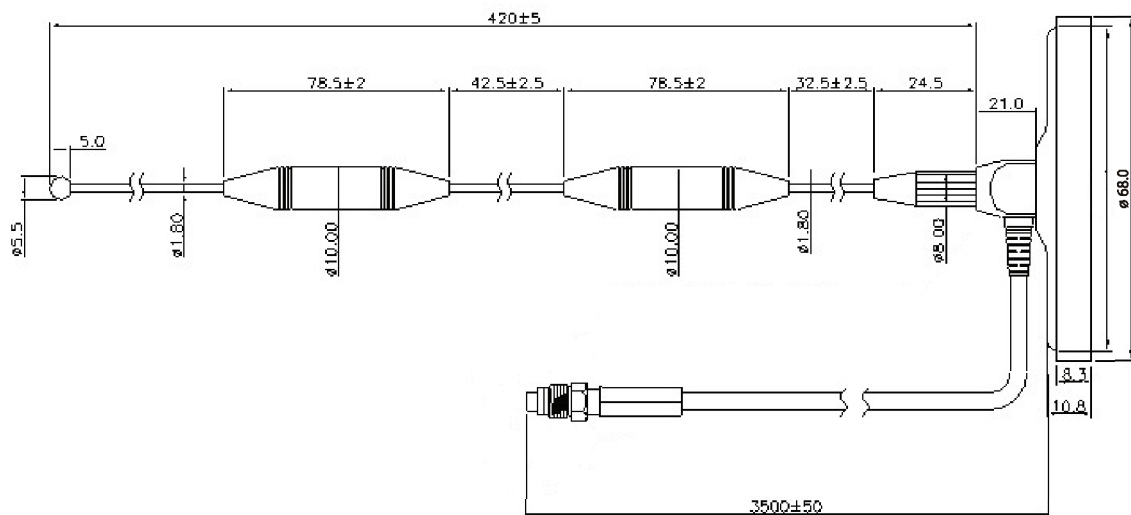

Unit: mm

## MECHANICAL SPECIFICATION

Attachment manner:	Magnetic
Available connector:	SMA (m)
Cable:	RG58, 3 m
Operating temperature:	- 30° to + 90°C
Weight:	300 g
Dimension:	∅ 68 mm x 420 mm



Ul. Piątkowska 163, 60-650  
Poznań, Poland | Europe

M +48 61 6713 413

E [hello@smseagle.eu](mailto:hello@smseagle.eu)

[www.smseagle.eu](http://www.smseagle.eu)