Tech datasheet Antenna 4G 10m

Reference: ACCANTENNA4G10M






Omnidirectional GSM/UMTS/LTE antenna suitable for places with low GSM/3G/4G signal reception.

Hardware details

| Frequency range: | 700/800/900/1700/1800/1900/2100/ |
|------------------|----------------------------------|
| | 2500/2600/2700 MHz |
| Radiation: | H-360° , V-30° |
| Polarization: | Linear |
| Gain: | 5-9 dBi |
| VSWR: | <1.8:1 |
| Impedance: | 50 Ω |
| Power handling: | 10 W max. |

Mechanical Specification

| Attachment manner: | Magnetic |
|------------------------|------------------|
| Available connector: | SMA (m) |
| Cable: | RG174/U, 5 m |
| Operating temperature: | -40 °C - +105 °C |
| Weight: | 575 g |
| Dimension: | Ø 65 mm x 460 mm |

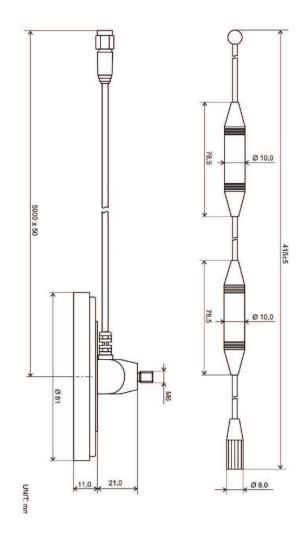

Product accessories: https://www.smseagle.eu/products/accessories/