



**CONGRATULATIONS**

**ON**

**PURCHASING**

**SMSEAGLE**

# SMSEAGLE

# NPE-9300-GPRS/3G

Hardware SMS Gateway

## USER'S MANUAL



Document version: 3.51

*The materials used in this publication are copyright and are not to be duplicated, copied, or used without the prior consent of the copyright holder. Technical specifications are subject to change without prior notice being given.*

# CONTENTS

|   |    |
|---|----|
| 1. GET READY TO START .....                       | 7  |
| What's in The BOX .....                           | 8  |
| Prepare for first start .....                     | 9  |
| 2. USING OF SMSEAGLE.....                         | 14 |
| Get to know with Connectors, Ports and LEDs ..... | 15 |
| Basic Operations .....                            | 16 |
| SMSEagle basic features.....                      | 16 |
| Phonebook .....                                   | 17 |
| Phonebook Contacts .....                          | 17 |
| Phonebook Groups .....                            | 17 |
| Phonebook Working Shifts .....                    | 18 |
| Reporting module .....                            | 18 |
| Statistics view .....                             | 19 |
| Settings.....                                     | 19 |
| Application settings.....                         | 19 |
| SMSEagle plugins .....                            | 22 |
| Autoreply plugin.....                             | 22 |
| Network Monitoring plugin .....                   | 23 |
| Email to SMS plugin.....                          | 27 |
| Email to SMS Poller .....                         | 29 |
| SMS to Email plugin.....                          | 32 |
| Callback URL plugin .....                         | 34 |
| SMS Forward.....                                  | 35 |
| Periodic SMS .....                                | 36 |
| Digital input/output .....                        | 37 |
| LDAP plugin.....                                  | 41 |
| SMSEagle API.....                                 | 43 |
| 0. API Authentication .....                       | 43 |
| 1. Send SMS: HTTP GET method .....                | 43 |
| 2. Send SMS: JSONRPC method .....                 | 45 |
| 3. Send SMS to a group: HTTP GET method .....     | 47 |
| 4. Send SMS to a group: JSONRPC method .....      | 49 |
| 5. Send SMS to contact: HTTP GET method .....     | 50 |

|   |     |
|---|-----|
| 6. Send SMS to contact: JSONRPC method .....              | 52  |
| 7. Send USSD code: HTTP GET method .....                  | 54  |
| 8. Send USSD code: JSONRPC method .....                   | 55  |
| 9. Send binary SMS: HTTP GET method .....                 | 56  |
| 10. Send binary SMS: JSONRPC method .....                 | 58  |
| 11. Read SMS: HTTP GET method .....                       | 59  |
| 12. Read SMS: JSONRPC method .....                        | 67  |
| 13. Delete SMS: HTTP GET method .....                     | 78  |
| 14. Delete SMS: JSONRPC method .....                      | 79  |
| 15. Get outgoing queue length: HTTP GET method .....      | 80  |
| 16. Get outgoing queue length: JSONRPC method .....       | 81  |
| 17. Get inbox length: HTTP GET method .....               | 82  |
| 18. Get inbox length: JSONRPC method .....                | 83  |
| 19. Get sentitems length: HTTP GET method .....           | 84  |
| 20. Get sentitems length: JSONRPC method .....            | 85  |
| 21. Get GSM/3G signal strength: HTTP GET method .....     | 86  |
| 22. Get GSM/3G signal strength: JSONRPC method .....      | 87  |
| 23. Phonebook group create: HTTP GET method .....         | 88  |
| 24. Phonebook group create: JSONRPC method .....          | 89  |
| 25. Phonebook group read: HTTP GET method .....           | 90  |
| 26. Phonebook group read: JSONRPC method .....            | 92  |
| 27. Phonebook group update: HTTP GET method .....         | 93  |
| 28. Phonebook group update: JSONRPC method .....          | 94  |
| 29. Phonebook group delete: HTTP GET method .....         | 95  |
| 30. Phonebook group delete: JSONRPC method .....          | 97  |
| 31. Phonebook group add contact: HTTP GET method .....    | 98  |
| 32. Phonebook group add contact: JSONRPC method .....     | 99  |
| 33. Phonebook group remove contact: HTTP GET method ..... | 100 |
| 34. Phonebook group remove contact: JSONRPC method .....  | 102 |
| 35. Phonebook contact create: HTTP GET method .....       | 103 |
| 36. Phonebook contact create: JSONRPC method .....        | 104 |
| 37. Phonebook contact read: HTTP GET method .....         | 105 |
| 38. Phonebook contact read: JSONRPC method .....          | 107 |
| 39. Phonebook contact update: HTTP GET method .....       | 108 |
| 40. Phonebook contact update: JSONRPC method .....        | 110 |

|  |     |
|--|-----|
| 41. Phonebook contact delete: HTTP GET method .....          | 111 |
| 42. Phonebook contact delete: JSONRPC method.....            | 112 |
| 45. Phonebook shift create: HTTP GET method .....            | 113 |
| 46. Phonebook shift create: JSONRPC method .....             | 115 |
| 47. Phonebook shift read: HTTP GET method .....              | 116 |
| 48. Phonebook shift read: JSONRPC method .....               | 117 |
| 49. Phonebook shift update: HTTP GET method .....            | 119 |
| 50. Phonebook shift update: JSONRPC method .....             | 121 |
| 51. Phonebook shift delete: HTTP GET method .....            | 122 |
| 52. Phonebook shift delete: JSONRPC method .....             | 123 |
| 53. Phonebook shift add contact: HTTP GET method .....       | 124 |
| 54. Phonebook shift add contact: JSONRPC method .....        | 125 |
| 55. Phonebook shift remove contact: HTTP GET method .....    | 126 |
| 56. Phonebook shift remove contact: JSONRPC method .....     | 128 |
| 57. Get modem state: HTTP GET method .....                   | 129 |
| 58. Get modem state: JSONRPC method .....                    | 130 |
| 59. Set modem state: HTTP GET method .....                   | 131 |
| 60. Set modem state: JSONRPC method .....                    | 132 |
| 61. User ID read: HTTP GET method .....                      | 133 |
| 62. User ID read: JSONRPC method .....                       | 134 |
| 63. Group members read: HTTP GET method .....                | 135 |
| 64. Group members read: JSONRPC method .....                 | 136 |
| Plugins and integration manuals for NMS & Auth systems ..... | 138 |
| Connecting directly to SMSEagle database .....               | 139 |
| Injecting short SMS using SQL .....                          | 139 |
| Injecting long SMS using SQL.....                            | 140 |
| Database cleaning scripts.....                               | 142 |
| SNMP agent.....  | 143 |
| Setting up SNMP v3 access control.....                       | 146 |
| Forwarding logs to external server .....                     | 147 |
| Automatic software updates checks.....                       | 148 |
| 3. TROUBLESHOOTING .....                                     | 149 |
| Verification of LEDs.....                                    | 150 |
| Checking the device logs .....                               | 150 |
| When the device is not reachable .....                       | 150 |

|  |            |
|--|------------|
| Restoring factory defaults .....                 | 151        |
| <b>4. SERVICE AND REPAIR.....</b>                | <b>152</b> |
| Warranty .....                                   | 153        |
| Service .....                                    | 153        |
| <b>5. TECH SPECS AND SAFETY INFORMATION.....</b> | <b>154</b> |
| Technical Specifications .....                   | 155        |
| Important Safety Information .....               | 157        |

## 1. GET READY TO START

## What's in The BOX

Your SMSEagle box contains:

- SMSEagle Hardware SMS Gateway
- External omnidirectional 3.5dBi GSM antenna (with magnetic foot)
- AC/DC power supply (input voltage: 100-240V)
- Warranty card



## Prepare for first start

Your SMSEagle is designed so that you can set it up quickly and start using it right away. Follow the steps below to get started.

### Step 1: Connect GSM antenna

#### ANTENNA INSTALLATION GUIDELINES

- Install the antenna in a location with access to a cellular network radio signal.
- The antenna must be installed such that it provides a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
- The antenna must not be installed inside metal cases.

Plug in the antenna connector to the device.

### Step 2: Insert SIM Card


**Please install SIM Card when the device is SWITCHED OFF.** SIM Card slot is located at the bottom of the device. Use a ball-pen or small screwdriver to eject SIM Card tray. Insert card into tray and push it gently into slot.



### Step 3: Power the device


The device is powered with AC/DC power supply adaptor delivered in the box. The device needs a power source of 12V DC to 30V with 17W power.

In order to power the device simply plug in a connector from AC/DC adaptor into the device.

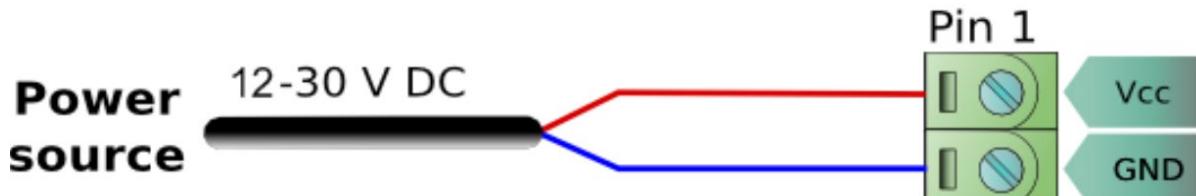

#### Step 4: Configure IP settings

Follow the steps below in order to the device first time using Ethernet – with initial factory settings on the device.

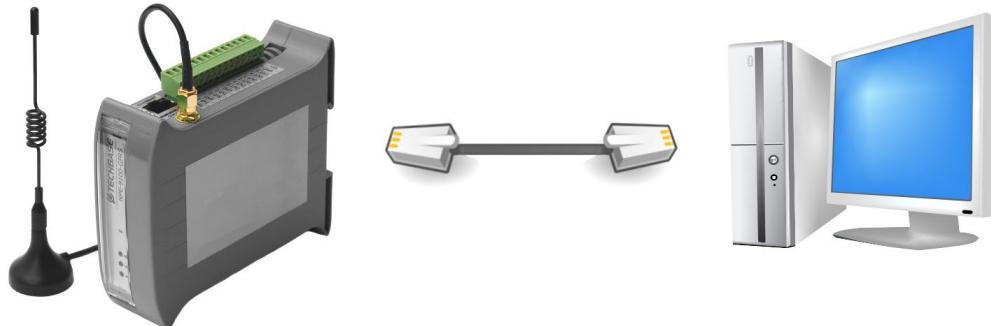

##### SMSEAGLE DEFAULT NETWORK CONFIGURATION

The following configuration is set on a device by default:

IP address: 192.168.0.101

Subnet Mask: 255.255.255.0

DHCP client: ON

##### a) CONNECT TO A PC

The computer (PC) must be in the same network subnet as the device. Taking into account the factory settings of the device (listed above), a computer must have following IP configuration:

IP address: 192.168.0.X


Subnet Mask: 255.255.255.0

where X is any value between 1-244 excluding 101

Examples of valid IP addresses are: 192.168.0.1 and 192.168.0.102

*The current tutorial assumes you have factory settings on the device. If you do not know what current network settings are you can restore device to the factory settings (see the Troubleshooting chapter).*

Example of computer IP configuration in Windows:

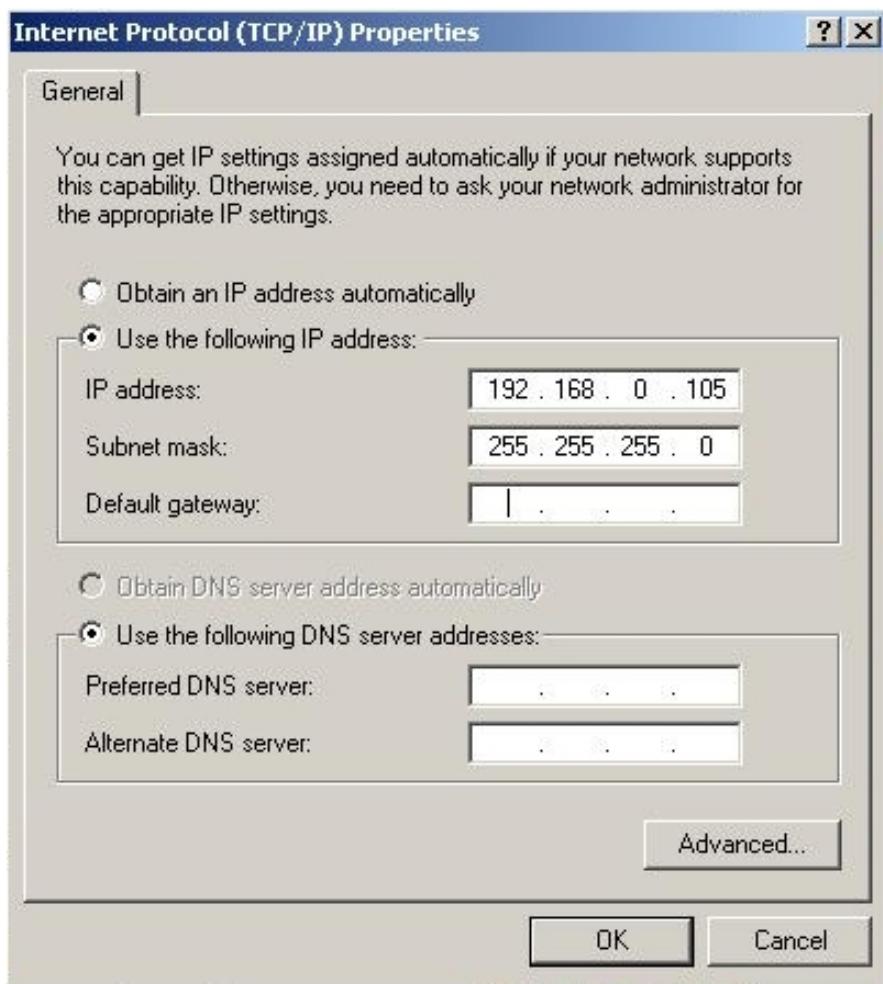

b) VERIFY YOUR CONNECTION


Properly connected device should respond to the ping command.

```
C:\>ping 192.168.0.101  
Badanie 192.168.0.101 z użyciem 32 bajtów danych:  
Odpowiedź z 192.168.0.101: bajtów=32 czas<1 ms TTL=128  
Statystyka badania ping dla 192.168.0.101:  
Pakiety: Wysłane = 4, Odebrane = 4, Utracone = 0 (0% straty),  
Szacunkowy czas błędzenia pakietów w millisekundach:  
Minimum = 0 ms, Maksimum = 0 ms, Czas średni = 0 ms  
C:\>_
```

*Example of ping after a proper connection to PC*

c) LOG IN TO SMSEAGLE

Open an internet browser on your PC and go to the address: 192.168.0.101

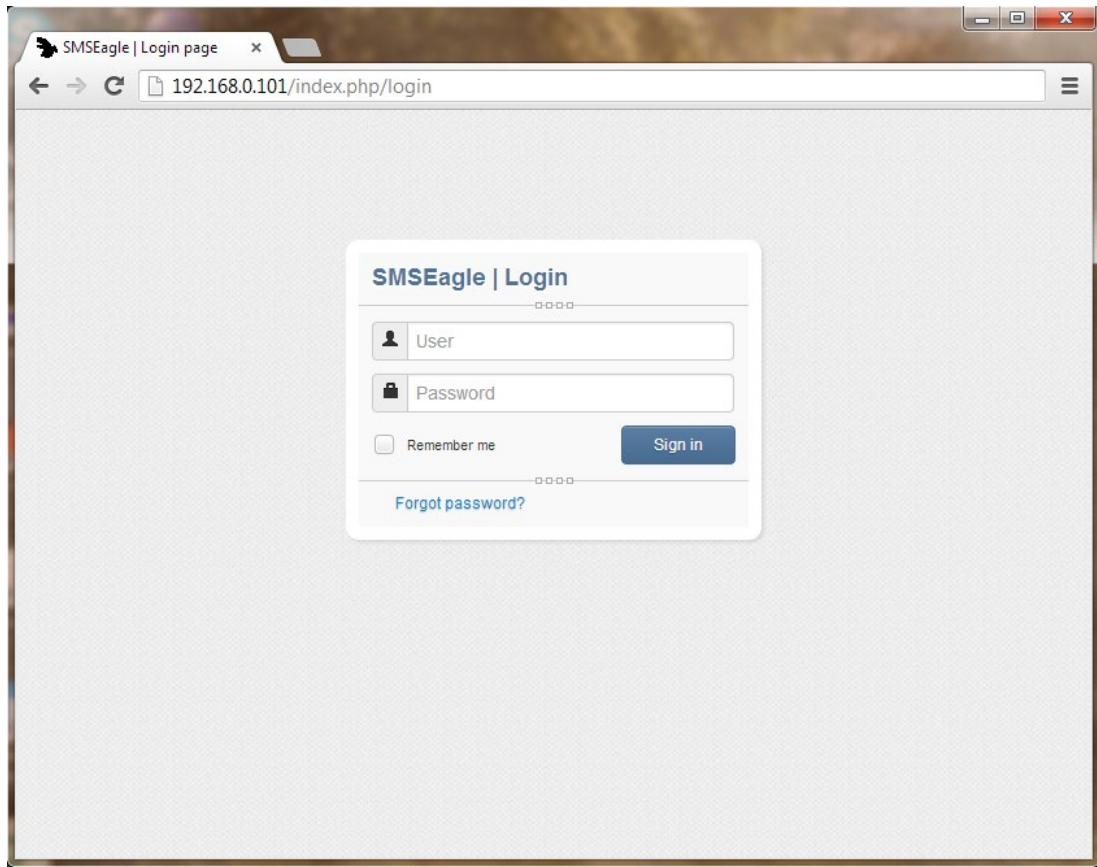

#### SMSEAGLE DEFAULT USER IS:

**Username: admin**

**Password: password**

Login to application with above username and password.

#### d) CONFIGURE IP SETTINGS

Click on menu position “Settings” and navigate to tab “IP Settings”.

The screenshot shows the SMS Eagle web interface. The left sidebar has 'User Settings' selected. The main panel shows the 'General settings' tab with the following configuration:

|                          |  |
|--------------------------|--|
| Get IP address from DHCP | <input checked="" type="radio"/> Enabled<br><input type="radio"/> Disabled |
| IP Address               | 192.168.1.103  |
| Subnet Mask              | 255.255.255.0  |
| Gateway IP Address       | 192.168.1.1  |
| DNS 1                    | 8.8.8.8  |
| DNS 2 (optional)         | 8.8.4.4  |
| MAC Address              | 78:a7:14:54:34:a1  |
| Hostname                 | smseagle   |

A yellow 'Save' button is at the bottom right.

Enter your IP settings. If you have DHCP server on your network you can choose “Get IP address from DHCP” – IP settings will be obtained automatically.

Press “Save” button.

**Save**

#### e) SETTING SIM-CARD PIN NUMBER

**This step should ONLY be done if your SIM-card requires PIN.**

If your SIM-card requires PIN number at startup, go to Settings > Maintenance Tab. Enter your PIN number in the field “SIM Card PIN”:

SIM Card PIN

**Save**


Press “Save” button.

#### f) REBOOT THE DEVICE

Go to Settings > Maintenance Tab. Press **Reboot** button.

## 2. USING OF SMSEAGLE

## Get to know with Connectors, Ports and LEDs

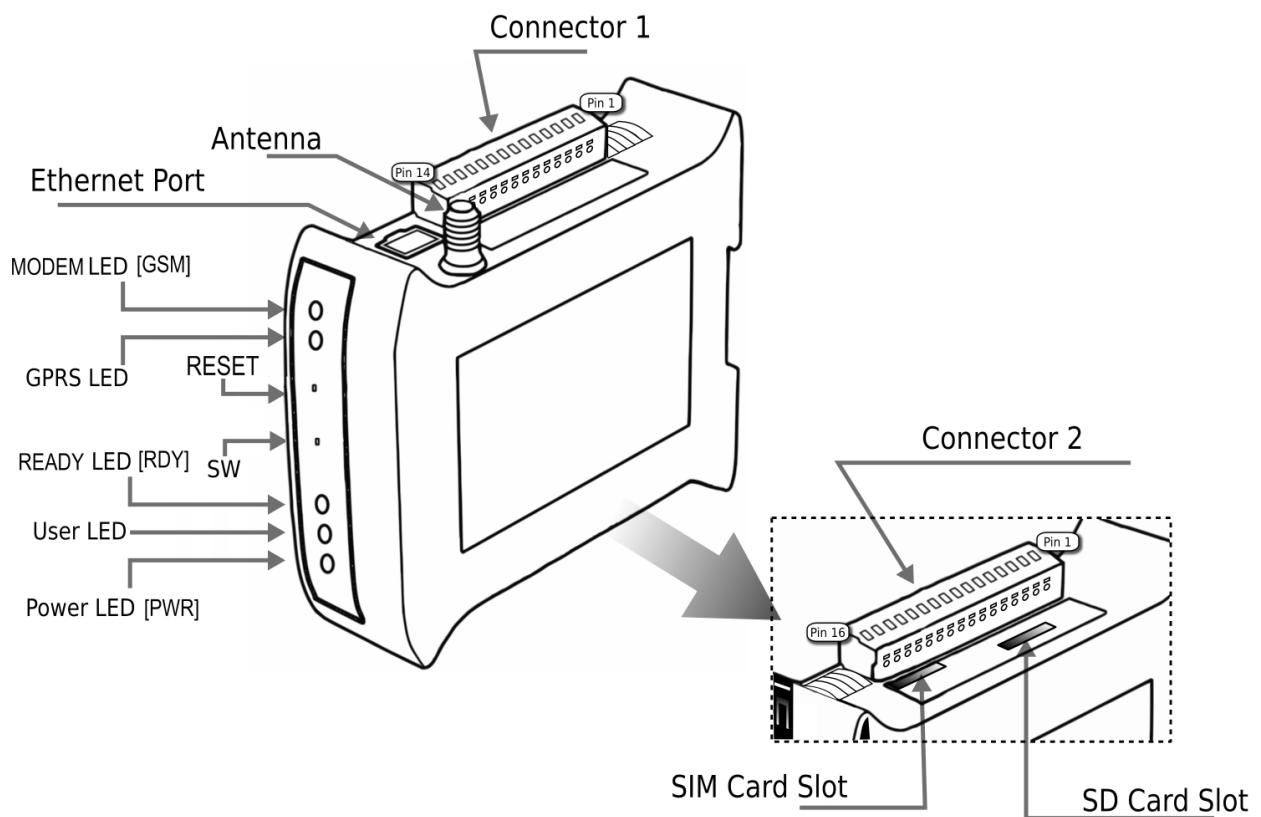

| Element       | Label | Description                                 |
|---------------|-------|---|
| Connector 1   | C1    | Power connector and serial ports            |
| Connector 2   | C2    | Additional ports connector (not used)       |
| SIM Card Slot | SIM   | SIM card slot                               |
| SD Card Slot  | SD    | Slot for additional SD/MMC card             |
| Ethernet Port | ETH   | Ethernet RJ45 socket                        |
| Antenna       | ANT   | Antenna socket                              |
| Power LED     | PWR   | LED indicating power-on                     |
| User LED      | USER  | LED for user application purpose (not used) |
| Ready LED     | RDY   | LED indicating device status                |
| Reset         | RST   | Switch for rebooting the device             |
| User Switch   | SW    | Switch for restoring to factory settings    |

## Basic Operations

SMSEagle is capable to work in various screen resolutions, making it accessible for wide range of devices: computers, laptops, tablets, smartphones, etc.

Open a web browser on your device, type in SMSEagle's IP address (as set in previous chapter). At login screen type in your username/password. Default username and password is given in chapter First Start.



## SMSEagle basic features

- Sending & Receiving SMS (managing messages with Inbox, Outbox, Sent Items)
- Smartphone-like conversation mode (messages are nicely grouped by phone number). You can easily track history of what you send and receive
- Sending to single numbers, contacts or groups from phonebook
- Import messages for sending from CSV file
- SMS Scheduling by specified date and time or delay
- Message templates (save & edit your own templates)
- Different message types (normal SMS, flash, WAP push, USSD codes)
- Unicode support (support of national characters)
- Multiuser support (each user has access to a private Inbox, Outbox, Sent Items)

## Phonebook

Web-GUI of SMSEagle device is equipped with Phonebook for managing contacts, groups and shifts. Each user can create private and public contacts, gather contacts in private and public groups. Contacts can also be optionally assigned to working shifts. Contacts and groups from Phonebook allows users efficient sending of messages.

### Phonebook Contacts

Below we present a main Phonebook view, where user manages his Contacts.

The screenshot shows a web-based Phonebook interface. At the top, there's a header bar with tabs for 'Contacts', '+ Add Contact', 'Public Contacts', 'Manage Groups', and 'Manage Shifts'. Below the header is a search bar with buttons for 'Select All', 'Clear All', 'Delete', and 'Action'. A table lists contacts with columns for 'Contact name', 'Groups', 'Shifts', and 'Manage'. The first contact, 'contact sample', has the ID 12345 and is listed under the 'private' group. The second contact, 'sample contact', has the ID 1111111111 and is listed under the 'work' group. Each contact row includes 'Edit', 'Send Message', and 'See conversation' links. At the bottom of the table are 'Select All', 'Clear All', 'Delete', and 'Action' buttons.

*Screenshot of default phonebook view*

In Phonebook Contact Management users can:

- Add/edit/delete contacts via web-gui
- Import contacts from CSV file
- Set contact to public or private visibility
- Add contacts to groups
- Add contacts to working shifts
- Send message to a contact
- View message conversation of a contact

### Phonebook Groups

The screenshot shows a 'Groups' management view. At the top, there's a header bar with tabs for 'Groups', '+ Create Group', 'Public Groups', and 'Manage Contacts'. Below the header is a search bar with buttons for 'Select All', 'Clear All', and 'Delete'. A table lists groups with rows for 'private' and 'work'. At the bottom of the table are 'Select All', 'Clear All', and 'Delete' buttons.

*Screenshot taken from phonebook groups*

In Phonebook Group Management view users can:

- Add/edit/delete groups
- Set groups to public or private visibility
- View group content (contacts belonging to the group)
- Send message to a group

## Phonebook Working Shifts

The Shift management feature allows to assign Phonebook contacts to working shifts. If a contact is assigned to any working shift, before sending a message the device will check if the contact is on a working shift. If the contact is not on shift the message will be skipped or moved to beginning of a next shift. To start using working shifts define shifts here and add contact to a shift in contact details.

The screenshot shows the 'Shift management' section of a mobile application. At the top, there's a header with a gear icon, the title 'Shift management', a '+ Add shift' button, and a 'Manage Contacts' button. Below the header is a descriptive text block: 'The Shift management feature allows to assign Phonebook contacts to working shifts. If a contact is assigned to any working shift, before sending a message the device will check if the contact is on a working shift. If the contact is not on shift the message will be skipped or moved to beginning of a next shift. To start using working shifts define shifts here and add contact to a shift in contact details.' Below this text is a table with columns: No., Shift name, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday, and Manage. Two rows are listed: Row 1 has 'A.Morning' from 08:00-16:00; Row 2 has 'B.Evening' from 16:00-23:59. Each row includes 'Edit', 'Delete', and 'Disable' buttons. At the bottom of the table area is a dropdown menu labeled 'When contact is not on shift: Send message at the beginning of next shift' with a 'Save' button.

Screenshot of shift management in phonebook

## Reporting module

Reporting module is an extension of basic search feature. The module allows users to filter messages from Inbox/Sent items folders based on custom criteria and display filtered messages. Filtered list of messages can be exported to CSV file.

The screenshot shows the 'Reporting module' interface. At the top, there's a header with a gear icon, the title 'Reporting module', a 'Reports' tab (which is selected), and a 'Statistics' tab. Below the header are several filtering options: 'Date range from - to:' with two date pickers (2017-11-21 to 2017-11-26) and time spinners (00:00 to 23:59); 'Folder:' dropdown set to 'Inbox'; 'Sender number contains:' input field; 'Message contains:' input field; and 'Number of messages matching your criteria: 1'. To the right of these filters is a 'Choose output fields:' section with a 'Selectable item' list and a 'Selected items' list. The 'Selected items' list includes: Receiving date, Sender number, SMS Center Number, Message ID, Text, and Read. There are also checkboxes for 'Merge multipart messages' and 'Include messages from My Folders', and a 'Generate report' button. Below these settings is a table showing the results of the search. The table has columns: Receiving date, Sender number, SMS Center Number, Message ID, Text, and Read. One row is shown, corresponding to the message count above. At the bottom left is an 'Export to CSV' button.

Screenshot of Reporting module

## Statistics view

The reporting module allows also to view daily statistics of sent/received messages. The statistics view displays number of messages per day and sender/receiver number.

Date range from - to:

2017-11-21 00 : 00      2017-11-26 23 : 59

Merge multipart messages  
Include messages from My Folders

Generate report

Folder:

Inbox

Number of messages matching your criteria: 1

| Date       | Sender number | Quantity |
|------------|---------------|----------|
| 2017-11-25 | 60730         | 1        |

Export to CSV

*Screenshot of Statistics view in Reporting module*

## Settings

Settings menu is divided into several tabs for easier maintenance.

### Application settings

Application settings can be changed under the Settings Tab > Application.

**General settings**

| Application                                    | IP Settings   | Failover | Date/Time  | Maintenance | Backup/Restore | Updates | Sysinfo |  |
|--|---|----------|--|-------------|----------------|---------|---------|--|
| Language                                       | English   |          |  |             |                |         |         |  |
| Country dial code                              | UNITED STATES (+1)  |          |  |             |                |         |         |  |
| Conversation sort                              | Newest First  |          |  |             |                |         |         |  |
| Conversation view type                         | Balloons  |          |  |             |                |         |         |  |
| Data per Page                                  | 15  |          | Will be used for paging in message and phonebook |             |                |         |         |  |
| Permanent delete                               | <input checked="" type="radio"/> Permanent delete Off - Always move to Trash first<br><input type="radio"/> Permanent delete On |          |  |             |                |         |         |  |
| Delivery Report                                | Default   |          |  |             |                |         |         |  |
| Inbox content is visible to                    | All users   |          |  |             |                |         |         |  |
| Reporting module accessible for                | All users   |          |  |             |                |         |         |  |
| Enable autoresponder for incoming MMS messages | No  |          |  |             |                |         |         |  |
| MMS autoresponder message                      | Warning: MMS messages are ignored. Please send your message again as SMS.   |          |  |             |                |         |         |  |
| Sending delay between SMS                      | 0   |          | in seconds (0 = no delay)                        |             |                |         |         |  |
| <input type="button" value="Save"/>            |   |          |  |             |                |         |         |  |

- You can change the language of the application to English, French, German, Polish or Spanish
- You can change the country dial code to your country (this setting affects only correct assignment of phone numbers to phonebook entries)
- You can sort the conversation to show messages either “Newest First” or “Oldest First”
- You can change the conversation view to either “Table” (tabular view) or “Balloons” (smartphone-like view), as shown in Folders chapter
- You can adjust the amount of data displayed on one page to 10, 15, 20, 25, 50, 100, 250 or Show all
- You can set for the messages to be permanently deleted or be moved to Trash first
- You can set the receiving of delivery reports to Yes, No or Default (network carrier setting)
- You can set the visibility of the Inbox content to All users or Only admins
- You can set access of the reporting module to All users or Only admins
- You can enable the autoresponder for incoming MMS messages
- You can set the MMS autoresponder message

- You can set a delay between SMS sending in seconds (this setting may be useful for cases where cellular operator blocks a number due to intensive traffic. Note: setting delay between SMS sending also introduces a delay time between receiving SMS)

## SMSEagle plugins

Basic features of SMSEagle software are extended by plugins that provide extra features to the software. Below you will find a description of plugins available in each SMSEagle device. All plugins are an integral part of SMSEagle software. That means that all described plugins are installed in a standard software of SMSEagle device and are available for free.

### Autoreply plugin

Plugin allows to automatically respond to each received message with defined text response.

#### PLUGIN CONFIGURATION

Plugin “Autoreply” allows to add many autoreply rules. Each rule can be enabled or disabled by user.

| No | Rule name              | Send autoreply message when                 | Manage  |
|----|------------------------|---|---|
| 1  | default rule           | Always send                                 | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |
| 2  | Phonebook contact rule | When incoming SMS comes from sample contact | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |
| 3  | Yes rule               | When incoming SMS text contains YES         | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |

Sending limit: Always send automatic replies

*Screenshot from plugin main window*

For each rule user can define:

- When autoreply message should be sent:
  - always,
  - when incoming message contains defined text,
  - and/or when message sender belongs to Phonebook contact/group
- If autoreply message text should be sent as Unicode characters

Plugin also allows to define sending limit for autoreply messages. It is possible to set limitation of max 5 messages / 10 minutes / phone number.

Sending limit:

Add or edit Autoreply rule

Rule name: test

Send autoreply when: From specified senders / with specified message

When incoming SMS comes from:  
work

When incoming SMS text contains:  
alert

Autoreply message:  
Thank you for your message. Our representative will contact you shortly

Send as Unicode:

**Save** **Cancel**

This screenshot shows the configuration interface for an autoreply rule. The rule is named 'test'. It triggers an autoreply when an incoming SMS comes from a specified sender ('work') or if the text of the incoming SMS contains the word 'alert'. The autoreply message is a template: 'Thank you for your message. Our representative will contact you shortly'. There is an option to send the message as Unicode, which is currently unchecked. At the bottom, there are 'Save' and 'Cancel' buttons.

Screenshot from "Add/edit autoreply rule"

## Network Monitoring plugin

SMSEagle is equipped with powerful (yet simple to use) network services monitoring features. With that features you can monitor any service that has listening port open. SMSEagle is trying to connect to each defined port in Network Monitoring feature and sends defined SMS alert when port is unavailable. Below you will find a brief overview of plugin capabilities.

Control status of all your defined tasks

| No. | Task Name          | Host            | Test Type   | Schedule       |
|-----|--------------------|-----------------|-------------|----------------|
| 1   | Lotus Notes        | 10.20.154.23    | ICMP (ping) | Disable 23:05: |
| 2   | Remote www service | www.smseagle.eu | Port: 80    | Disable 23:05: |
| 3   | SMTP Mail Server   | 10.20.154.231   | Port: 25    | Always         |
| 4   | Sharepoint         | 10.20.154.29    | ICMP (ping) | Always         |

- see a settings' overview for all of your tasks
- check which server/service is currently unavailable
- see when a specific server/service was last down (last downtime)
- check what happened at last downtime (see server/service response)
- edit/delete your tasks
- disable tasks when needed (e.g. when doing a machine upgrades)

Define what you want to monitor in each task

### Add Monitoring Task

Task name:

Host:  (*IP address or Hostname*)

Test type:  ICMP (ping)  port TCP  port UDP  SNMP

Number of requests:

Connect Timeout:  (*In seconds, increase this for busy hosts*)

- choose a name for the task
- set parent task. If parent task is defined, network monitor will monitor child task health only if parent task is healthy
- enter a host (IP address or Hostname)
- choose ICMP (ping) to monitor a server with ICMP protocol
- or PORT (TCP/UDP) to monitor your service on a selected port (SMS Eagle will check if port is open)
- or SNMP to monitor objects via SNMP protocol (supported return types: numeric, string)
- increase a default timeout value for busy servers (by default we set it to 30 seconds)
- test the connection of server

#### Define a schedule

**Add Monitoring Task**

|   |  |
|---|--|
| Port number:  | <input type="text" value="0"/> (Port number)                                     |
| Connect Timeout:  | <input type="text" value="30"/> (In seconds, increase this for slow connections) |
| Active: <input type="radio"/> Always on <input checked="" type="radio"/> Disable between specified hours  |  |
| Disable from: <input type="text" value="23"/> : <input type="text" value="55"/> to: <input type="text" value="05"/> : <input type="text" value="00"/> |  |
| SMS Recipient(s): <input type="radio"/> Phonebook public group(s) <input checked="" type="radio"/> Single number(s)                                   |  |
| <input type="text" value="123456789"/>  |  |
| SMS sent when: <input checked="" type="checkbox"/> host/service goes down <input type="checkbox"/> host/service goes up after failure                 |  |

- choose if task should be always enabled...
- ...or disable it in chosen times  
(during a night, when a machine goes through planned restarts, during resource intensive backups, etc.)
- enter a phone number or choose a group of users to send your SMS alert to
- select when to send SMS alert (when host/service goes down, when host/service goes up after failure)

## Define a SMS alert message

SMS Text:  
when service goes  
down

This is automatic alert from SMSEagle Network-monitor. Alert from task: {TASKNAME}. Error was: {RESPONSE} Time generated: {TIMESTAMP}

Placeholders for SMS Text:

{TASKNAME} - name of monitoring task  
{HOST} - host  
{RESPONSE} - error response from server/service  
{TIMESTAMP} - error timestamp

Define your SMS messages when host or service becomes unavailable/comes back to life. Choose field placeholders for your SMS text:

- {TASKNAME} – puts a taskname inside SMS text
- {HOST} – hostname or IP address
- {RESPONSE} – message received (in case of no response from server/service)
- {TIMESTAMP} – timestamp of an error

## Receive SMS alerts




- be immediately alerted when your services/servers go down (or go up after failure)
- give yourself a chance to react quickly

## MONITORING FREQUENCY

**Important note:** Monitoring tasks are performed in a synchronous mode. This means that all monitoring tasks create a queue and are executed one by one. Frequency of executing each monitoring queue is determined by number of all your tasks and their timeout. For example: if you define 15 monitoring tasks each with 30s timeout, then monitoring queue will execute every 8 minutes.

## REPORTS

This tab allows you to view reports of task errors in the Network Monitor for a selected period of time.

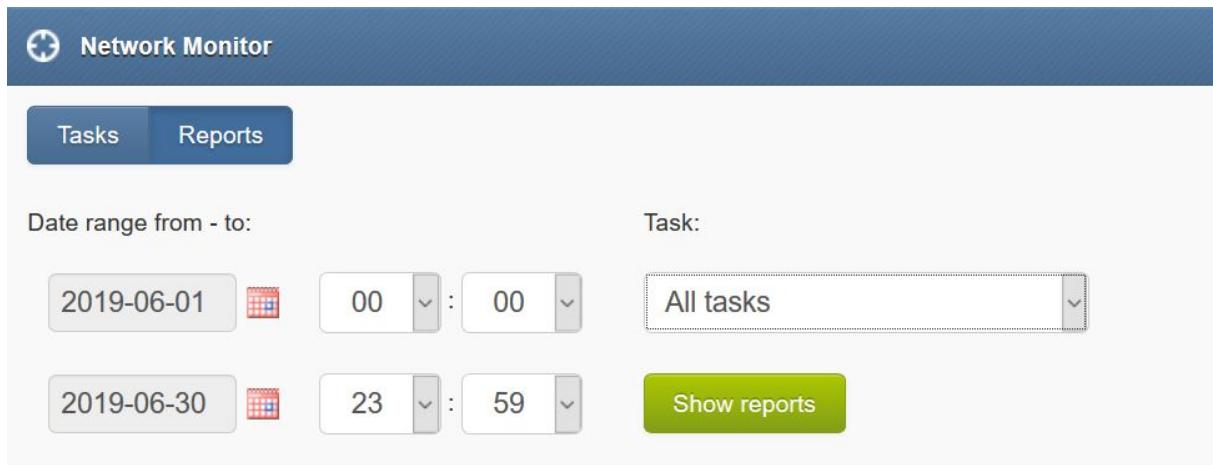

Screenshot from Network Monitor > Reports window.

## Email to SMS plugin

Email To SMS plugin allows you to convert an email to SMS message.

### BASIC USAGE

If the plugin is enabled, email sent to the email address:

**PHONE\_NUMBER@[IP\_ADDRESS\_OF\_SMSEAGLE]** will be converted to SMS message.

**PHONE\_NUMBER** is a destination phone number

**IP\_ADDRESS\_OF\_SMSEAGLE** is the IP address of your device.

The text of the email is the text of the SMS message (optionally you can append email subject at the beginning of SMS message).

*Example: email message sent to the address: 123456789@[192.168.0.101] will be converted to SMS message and delivered to phone number 123456789.*

## SEND TO USERNAME/GROUP

Email sent to the email address:

**NAME\_IN\_PHONEBOOK@[IP\_ADDRESS\_OF\_SMSEAGLE]** will be converted to SMS message and will be sent to a user or user's group from SMSEagle's phonebook.

**NAME\_IN\_PHONEBOOK** is a username or group name (must be a public group) from SMSEagle's phonebook

**IP\_ADDRESS\_OF\_SMSEAGLE** is the IP address of your device.

The text of the email is the text of the SMS message (optionally you can append email subject at the beginning of SMS message).

*Example: email message sent to the address: db-admins@[192.168.0.101] will be converted to SMS message and delivered to all members of db-admin group. The db-admin group must be defined in your SMSEagle phonebook.*

#### USING FQDN IN EMAIL ADDRESS

It is also possible to use Fully Qualified Domain Name in an email address sent to SMSEagle box (eg.: 123456789@mydomain.com). Please refer to our FAQ article: [How do I configure Email2SMS plugin to accept FQDN email addresses](#) for more details.

#### EMAIL SUBJECT- ADDITIONAL PARAMETERS (OPTIONAL)

It is possible to set additional flags for single converted message using email subject. Currently the following flags are available:

- date - date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time
- modem\_no - sets sending modem number (available only for multimodem devices)

If you send email with subject containing FLAG=VALUE the flag will be set for this particular email2SMS message.

*Example 1: email message with subject containing **modem\_no=2** will be converted to SMS message and sent via modem number 2.*

*Example 2: email message with subject containing **date=201801010005&modem\_no=2** will be converted to SMS message and sent on 2018-01-01 00:05 via modem number 2.*

Email To SMS settings

|  |   |
|--|---|
| Enable Email To SMS  | <input type="button" value="Yes"/>                                      |
| Email2SMS service status   | Enabled   |
| What to do with email subject  | <input type="button" value="Use for authentication"/>                   |
| If authentication is enabled provide SMSEagle user and password or access token in the email subject.<br>Use the following syntax: login=john&pass=doe or access_token=token<br>(replace john doe / token with your own user and pass / token) |   |
| Maximum number of characters in SMS  | <input type="text" value="1300"/><br>Value should be between 1 and 1300 |
| Unicode encoding of SMS text   | <input type="button" value="Yes"/>                                      |
| This should be enabled only when you want to include special national characters.  |   |
| <input type="button" value="Save"/>  |   |

Screenshot from Email to SMS settings

- if you want to use the plugin, set ‘Email2sms active’ to ‘Yes’
- if you want to include a subject of an email in SMS message, set ‘What to do with email subject’ setting to ‘Include in SMS’. The email subject will be appended at the beginning of SMS message
- if you want to use user authentication, set ‘What to do with email subject’ setting to ‘Use for authentication’. If user authentication is enabled, provide in a subject of an email your login and password in the following form: login=john&pass=doe OR provide API access token in the following form: access\_token=token
- if you want to include only a subject of an email in SMS message, set ‘What to do with email subject’ setting to ‘Send only subject without email body’. Only the email subject will inserted in SMS message
- the text of an email will be cropped to the value ‘Maximum number of characters’. Maximum allowed length of SMS message is 1300 characters
- if you want to include in SMS message special national characters (like äööß 我) set “Unicode encoding of SMS text” to ‘Yes’

## Email to SMS Poller

Email2SMS Poller is an alternative for Email2SMS plugin for convert incoming emails to SMS message. This plugin should be used when you need to fetch emails from existing mailbox on your mail server. The Email2SMS Poller plugin connects to configured email account and polls it in specified periods of time for new emails. Once new email is received, it is automatically converted to SMS message.

The plugin supports POP3 and IMAP accounts.

To send SMS using Email2SMS Poller you have to send an email to specified email account, with email subject containing mobile number or phonebook contact/group name.

#### BASIC EXAMPLE

For example, such email message:

TO: [smseagle@mycompany.com](mailto:smseagle@mycompany.com)  
FROM: [john.doe@mycompany.com](mailto:john.doe@mycompany.com)  
SUBJECT: +48333444555  
BODY: Hello world!

In this case SMSEagle gateway will fetch incoming email from [smseagle@mycompany.com](mailto:smseagle@mycompany.com) account and send it's body as SMS message to +48333444555 mobile number.

#### SEND TO USERNAME/GROUP

If you want to send SMS to a contact or group from SMSEagle phonebook, put the contact/group name in SUBJECT field.

*Notice:*

*Messages that are processed by Email2SMS Poller (but not deleted) are marked in the mailbox as read. Software is based on flagging messages- Read/Unread. Marking a read message in the mailbox as unread will result in being processed again by Email2SMS Poller. We suggest using a separate email account to avoid situation with resending the same message (marking unread already processed read message).*

## PLUGIN CONFIGURATION

**Email To SMS Poller**

|  |  |
|--|--|
| Enable Email to SMS Poller   | <input type="button" value="Yes"/>   |
| Email2SMS poller service status  | Enabled  |
| Check for email every  | <input type="text" value="30"/> Time in seconds  |
| Maximum number of characters in SMS  | <input type="text" value="1200"/> Value should be between 1 and 1300   |
| Unicode encoding of SMS text   | <input type="button" value="No"/> This should be enabled only when you want to include special national chars (like àéàöåí) in SMS message |
| Protocol   | <input type="button" value="POP3"/>  |
| Host   | <input type="text" value="mail.example.com"/>  |
| Port   | <input type="text" value="110"/> Standard email services ports: POP3: 110, POP3 (TLS/SSL): 995, IMAP: 143, IMAP (TLS/SSL): 993             |
| Username   | <input type="text" value="user"/>  |
| Password   | <input type="password" value="*****"/>   |
| Use TLS/SSL encryption   | <input type="checkbox"/>   |
| Delete emails from server after processing   | <input type="checkbox"/>   |
| <input type="button" value="Save"/> <input type="button" value="Test connection"/> |  |

Screenshot from Email to SMS Poller

- if you want to use the plugin, set 'Enable Email2sms Poller' to 'Yes'
- Set email fetching interval (in seconds)
- the text of an email will be cropped to the value 'Maximum number of characters'. Maximum allowed length of SMS message is 1300 characters.
- If you want to include special national characters, enable "Unicode encoding of SMS text"
- Choose protocol from IMAP or POP3
- Provide mailbox configuration (host, port, user, password, encryption settings)
- If you want to delete emails from the mailbox after they are fetched by Email2SMS Poller, please mark "Delete emails from server after processing"

## SMS to Email plugin

SMS to Email plugin allows you to forward your SMS messages to email address.

The plugin can be used in two modes:

- a. forwarding of incoming SMS to email of last sender (so called **Two-way Email2SMS & SMS2Email**)  
In this mode, when SMSEagle receives incoming SMS, it checks if earlier anyone was sending SMS to the number from incoming SMS using Email2SMS. If last sender is found, the incoming SMS is forwarded to the email address of last sender. If no last sender is found, then the incoming message is forwarded to a default email address given in plugin settings.
- b. It forwards all the incoming messages to one fixed email address.  
In this mode all incoming SMS messages are forwarded to always the same email address.

Plugin uses an external SMTP server for sending emails.

### EMAIL TEXT FROM PLUGIN

Email body from SMS To Email plugin contains:

- phone number from incoming SMS (and phonebook contact name if found)
- Date, time when SMS is received
- SMS message

#### **Example email text:**

From: +483334455 (John Doe)

Received: 2017-06-01 14:38:12

Message: My SMS message

## PLUGIN CONFIGURATION

**SMS to Email Settings**

|  |                          |
|--|--------------------------|
| Enable forwarding to email                                     | No                       |
| Type of email forwarding                                       | To fixed email address   |
| Forward to Email address                                       | contact@example.com      |
| Email subject  | Incoming SMS on SMSEagle |
| Enter your SMTP server settings for sending emails (required): |                          |
| SMTP Host  | mail.example.com         |
| SMTP Port  | 587                      |
| SMTP Connection encryption                                     | none                     |
| Username   | user                     |
| Leave blank if SMTP authentication is not required             |                          |
| Password   | *****                    |
| Leave blank if SMTP authentication is not required             |                          |
| Sender email   | user@example.com         |
| <b>Save</b>  |                          |

*Screenshot from SMS to Email settings*

- if you want to use the plugin, set ‘Enable forwarding to email’ to ‘Yes’
- choose a type of email forwarding: “To email of last sending user” (so called “Two-way Email2SMS & SMS&Email”) or “To fixed email address”
- enter an email address to which incoming SMS messages are to sent
- enter SMTP configuration for your SMTP server that will be used for sending emails

## Callback URL plugin

Callback URL plugin allows you to forward incoming SMS message to a defined URL address. If the plugin is enabled, on each incoming SMS message SMSEagle will trigger HTTP(S) request to a defined URL. HTTP(S) request can be of type GET or POST.

### PLUGIN CONFIGURATION

Plugin “Callback URL” allows to add unlimited number of rules. Each rule can be enabled or disabled by user.

The screenshot shows a table with columns: No., Rule name, Send callback when, and Manage. Rule 1 is named 'test1' and 'Always send'. Rule 2 is named 'test2' and 'Always send'. Each row has 'Edit', 'Delete', and 'Disable' buttons. A green button at the top right says '+ Add new rule'. Below the table is a 'Parameter description' section with detailed explanations for various parameters like sender, timestamp, text, msgid, modemno, oid, and apikey. It also specifies the expected HTTP response (200 OK) and provides a request string example for an HTTP GET request.

| No. | Rule name | Send callback when | Manage  |
|-----|-----------|--------------------|---|
| 1   | test1     | Always send        | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |
| 2   | test2     | Always send        | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |

**Parameter description:**  
The request sent via a GET/POST to your URL have the following parameters:  
**sender:** Sender number  
**timestamp:** Time when SMSEagle received the message in the following format YYYYmmddHHss (example: 20140531092257)  
**text:** Content of the SMS message  
**msgid:** SMSEagle message id  
**modemno:** Modem number on which incoming message was received  
**oid:** Value of OID identifier assigned to outgoing message with matching phone number (optional)  
**apikey:** API key of your service (optional) (optional)

SMSEagle will be expecting HTTP response: **200 OK**

**Request string example for HTTP GET:**  
?sender=48601123123&timestamp=20140531092257&msgid=431&modemno=1&text=This+is+an+incoming+message

Screenshot from Callback URL settings

For each new rule user has to fill in the requested fields:

- ‘URL’ field defines remote address of your callback script
- ‘Test URL’ button allows to test whether your Callback URL configuration is correct. SMSEagle will make a callback request with test parameters and will verify the response of remote server
- ‘URL method’ allows to choose whether callback to your URL is done with HTTP(S) GET or POST method
- “Send request when” defines if the request is always sent, sent only when SMS sender belongs to a given contact/group or only when incoming message contains a given character string
- Optionally you can define “API key of your service” value. This will be passed to your callback URL in parameter ‘apikey’. If you leave the field blank, ‘apikey’ parameter will not be passed to your callback URL
- User may also choose whether to enable support of self-signed SSL certificate

Add or edit Callback URL rule

Rule name: Test 1

URL: https://test.com

**Test URL**

URL method: GET

Send request when: All incoming messages

API key of your service:

You can set additional API key that is expected by your service (to increase security)

Allow self-signed SSL certificate:

Verify peer:

Verify peer name:

**Save** **Cancel**

After sending HTTP(S) GET/POST request to your callback URL, SMSEagle will be expecting HTTP response: 200 [OK]. If other or no response is received from your callback URL, SMSEagle will keep retrying every X minutes for 24 hours. Retry interval can be set in main plugin Window:

Retry interval after failed request (in minutes) 2

**Save**

## SMS Forward

The plugin “SMS forward” allows to forward incoming SMS messages to one/may recipients according to defined rules.

### PLUGIN CONFIGURATION

Plugin “SMS Forward” allows to add many forwarding rules. Each rule can be enabled or disabled by user.

The screenshot shows the SMSEagle plugin configuration interface. On the left is a sidebar with links like User Settings, Dashboard, Compose, Folders, My Folders, Phonebook, Users, Reporting module, Network Monitor, and Email To SMS. The main area has a title bar "SMS Forward" and a sub-instruction "Forward incoming SMS according to rules defined below". Below this is a table with two rows of rules:

| No. | Rule Name         | Rule Condition                                | SMS Recipient(s) | Manage                                   |
|-----|-------------------|---|------------------|--|
| 1   | Low SIM balance   | When incoming message contains Pozostało Ci 1 | RJ               | <b>Edit</b> <b>Delete</b> <b>Disable</b> |
| 2   | Low SIM balance 2 | When incoming message contains Brak środków   | RJ               | <b>Edit</b> <b>Delete</b> <b>Disable</b> |

A green button "+ Add new rule" is located at the top right of the table.

*Screenshot from plugin main window*

For each rule user can define:

- When incoming SMS should be forwarded (Rule type) and to what number(s) the message should be forwarded (SMS Recipient).
- Whether or not include in SMS a sender number from which original SMS came from.
- When defining a rule user can choose SMS recipient (who gets the forwarded SMS).
- It can be either phone number or name of group from phonebook.
- User may define many forwarding rules in the plugin.
- Each rule is processed independently.
- There is a possibility to enable/disable each rule.

The screenshot shows a modal dialog titled "Add or edit forwarding rule". The "Rule name" field contains "Low SIM balance 2". The "Message header" dropdown is set to "Don't include". The "Forward" dropdown is set to "From specified senders / with specified message". Under "When incoming SMS comes from:", there is an empty input field. Under "When incoming SMS text contains:", the checkbox is checked and the input field contains "Brak środków". Under "Forward to:", the input field contains "warehouse" with a remove button. At the bottom are "Save" and "Cancel" buttons.

*Screenshot from "Add/edit forwarding rule"*

## Periodic SMS

The plugin “Periodic SMS” allows to send SMS messages or USSD codes at a desired time interval. User may define many sending rules, and each rule will be processed independently.

### PLUGIN CONFIGURATION

Plugin “Periodic SMS” allows to add many sending rules. Each rule can be enabled or disabled by user.

The screenshot shows a table of periodic SMS rules. The columns are No., Rule Name, SMS Recipient(s), Sending interval, and Manage (with Edit, Delete, and Disable buttons). There are three rules listed:

| No. | Rule Name            | SMS Recipient(s) | Sending interval       | Manage   |
|-----|----------------------|------------------|------------------------|--|
| 1   | Reminder             | 123 456 789      | Every day: 12:00       | <button>Edit</button> <button>Delete</button> <button>Disable</button> |
| 2   | Reminder             | 999 999 999      | Mondays : 1:00         | <button>Edit</button> <button>Delete</button> <button>Disable</button> |
| 3   | Reminder (Batteries) | 123 456 789      | Every year: 1/2, 10:00 | <button>Edit</button> <button>Delete</button> <button>Disable</button> |

At the top left is a "Send periodic SMS messages" button, and at the top right is a "+ Add new rule" button.

*Screenshot from plugin main window*

For each rule the user can define:

- The rule name

- Sending interval (Hourly, Daily, Weekly, Monthly or Annually)
- Message type (SMS, USSD Code)
- The content of the SMS text
- The recipients, sending SMS to a single number or a group from phonebook

**Add or edit sending rule**

Rule name:

Sending interval:

Every year:

Minute

Message type:

SMS Text:  
Change temperature sensor batteries.

SMS Recipient(s):  Phonebook public group(s)  Single number(s)

**Save** **Cancel**

Screenshot from “Add new rule” window

## Digital input/output

The NPE-9300 device is equipped with 4 usable digital inputs (DI) and 2 digital outputs (DO). The digital inputs can be used to receive signals from outside sensors or devices and automatically trigger sending of SMS message based on input state. On the other hand the digital outputs may be used to activate external devices connected to the outputs when certain SMS messages are received by SMSEagle.

The digital inputs of SMSEagle NPE-9300 devices are of type pull-up (see more [https://en.wikipedia.org/wiki/Pull-up\\_resistor](https://en.wikipedia.org/wiki/Pull-up_resistor)) and are represented by the following states:

| Logical level DI | Voltage      |
|------------------|--------------|
| LOW (0)          | GROUND       |
| HIGH (1)         | OPEN CIRCUIT |

The digital outputs of SMSEagle NPE-9300 devices are of type open-collector (see more [https://en.wikipedia.org/wiki/Open\\_collector](https://en.wikipedia.org/wiki/Open_collector)) and are represented by the following states:

| Logical level DO | Voltage |
|------------------|---------|
| LOW (0)          | GROUND  |

HIGH (1)

OPEN CIRCUIT

## PLUGIN CONFIGURATION

The plugin “Digital input/output” allows you to define rules that control the behaviour of digital inputs/outputs on SMSEagle device. User may define several processing rules for both inputs and outputs.

The screenshot shows the configuration interface for the "Digital input/output" plugin. At the top, there is a status bar with "Plugin status: Enabled" and a "Save" button. Below this, there are two main sections: "Digital inputs" and "Digital outputs".

**Digital inputs:**

- Input 1 signal: 0
- Input 2 signal: 0
- + Add new rule

| No | Rule Name       | Port number | When input signal | Send to     | Manage  |
|----|-----------------|-------------|-------------------|-------------|---|
| 1  | Open door alert | 1           | 1                 | 123 456 789 | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |

**Digital outputs:**

- Output 1 signal: 0
- Output 2 signal: 0
- + Add new rule

| No | Rule Name   | Port number | Rule Condition                             | Set signal to | Manage  |
|----|-------------|-------------|--|---------------|---|
| 1  | Horn enable | 1           | Only when incoming SMS text contains Alert | 1             | <a href="#">Edit</a> <a href="#">Delete</a> <a href="#">Disable</a> |

Screenshot from plugin window

## DIGITAL INPUTS

For each processing rule for digital input user can define:

- The rule name
- Port number (1...7)
- State of input signal that will trigger sending of SMS message (field “When input signal”)
- SMS text (field “Send SMS message”)
- The recipients from phonebook (field “Send to”)

Add or edit rule

Rule Name: Open door alert

Port type: Digital input

Port number: 1

When input signal: 1 (high)

Send SMS message:

The door of the room 54A/8 was opened. Possible intruder in the datacenter.

Send to:  Insert Name from Contact List

Save Cancel

This screenshot shows the configuration interface for a digital input rule. It includes fields for the rule name, port type, port number, input condition, SMS message content, recipient, and save/cancel buttons.

Screenshot from digital input "Add or edit rule" window

## DIGITAL OUTPUTS

For each processing rule for digital output user can define:

- The rule name
- Port number (1,2)
- On what condition digital output should be set (all incoming messages, when incoming SMS comes from specified contact in phonebook or when incoming SMS text contains given value)
- State of output signal that will be triggered by incoming SMS message
- Output signal duration in seconds (0 = without time limit)
- Output signal delay before signal is set

Add or edit rule

Rule Name:

Port type: Digital output

Port number: 1

Set for: From specified senders / with specified message

When incoming SMS comes from:

When incoming SMS text contains:

Set signal to: 0 (low)

Signal time: 0.0  
Signal duration in seconds (0 = without time limit)

Signal delay: 0.0  
Delay in seconds before signal is set

Screenshot from digital output "Add or edit rule" window

## LDAP plugin

The LDAP plugin allows to access Active Directory (hereinafter referred to as “AD”) and read contacts and groups in SMSEagle web-GUI.

### PLUGIN CONFIGURATION

Choose “LDAP” from left side menu in SMSEagle web-GUI to access plugin configuration. After enabling the plugin, user needs to fill in all requested fields according to AD settings.

In the “AD phone attribute” field user needs to choose which phone attribute from AD will be shown in SMSEagle web-gui.

The screenshot shows the 'LDAP settings' configuration window. It contains the following fields:

|                           |                           |
|---------------------------|---------------------------|
| Enable LDAP plugin        | Yes                       |
| AD user                   | AD user                   |
| AD user password          | .....                     |
| Server                    | AD IP address             |
| Port                      | 389                       |
| Object distinguished name | CN=Users,DC=corp,DC=ADdom |
| Object class              | Group                     |
| AD phone attribute        | Telephone number          |

At the bottom are two buttons: 'Save' (orange) and 'Test connection' (blue). A note below the buttons states: "LDAP settings must be saved before running a connection test."

*Screenshot from “LDAP settings” window*


Click “Save” and “Test connection” to make sure that SMSEagle is connected with AD server.

The screenshot shows the 'LDAP settings' configuration window. At the top, a red banner displays the message: "Connection to LDAP/Active Directory established." Below the banner is the configuration interface, which includes the same fields as the previous screenshot: Enable LDAP plugin (Yes), AD user (AD user), AD user password (.....), Server (AD IP address), Port (389), Object distinguished name (CN=Users,DC=corp,DC=ADdom), Object class (Group), and AD phone attribute (Telephone number).

*Screenshot showing successful connection to AD server.*

With connection established, AD contacts/groups suggestions are shown in selected modules of web-gui.  
Start typing any part of contact/group name or number to show AD contact suggestions.

Type “LDAP” (case sensitive) to check all contacts listed in AD directory.

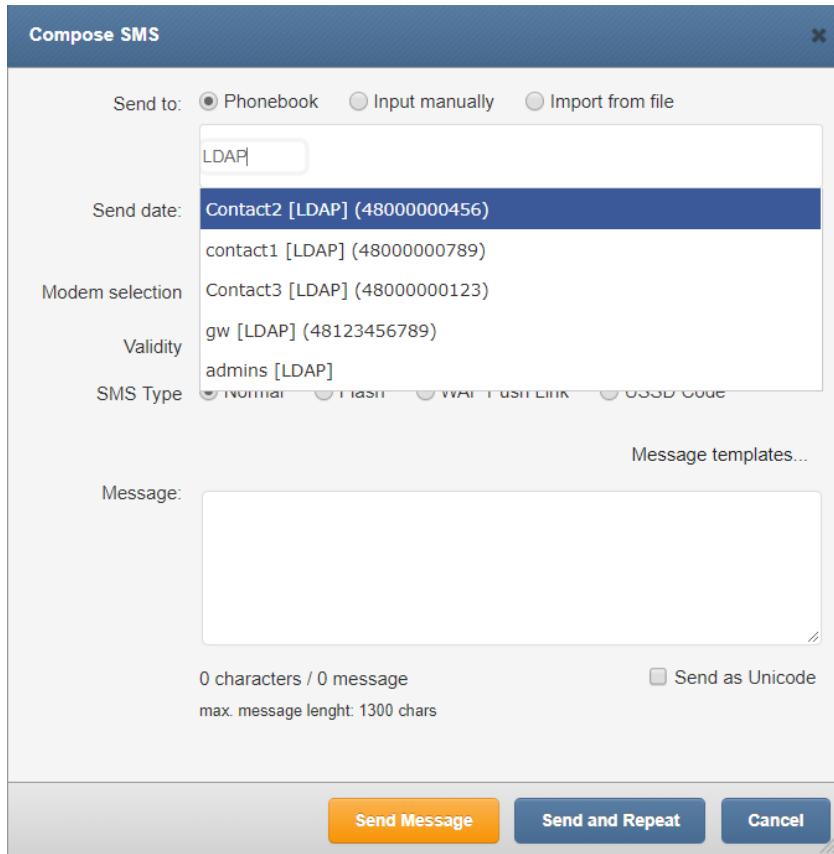

*Screenshot from “Compose” module with LDAP connection enabled*

LDAP directory suggestions can be used in “Compose”, “Autoreply” and “Digital input/output” modules.

# SMSEAGLE API

---

SMSEagle has powerful built-in REST API functionalities. API is dedicated for integration of SMSEagle with any external system or application. Below you will find a detailed description of API functionalities.

**Please note, that SMSEagle API supports both HTTP and HTTPS protocol.**

For your convenience sample usage of SMSEagle's API in most popular programming languages are available at: <http://www.smseagle.eu/code-samples/>

## 0. API Authentication

Before you can start using API, first you need to enable API access.

- a) go to WebGUI > Users
- b) create a new User with access level "User", set "Access to API" to "On" (optionally you may limit access only to selected API methods)
- c) choose API authentication method. This can be either:
  - **access\_token (*recommended solution*)**  
Edit your API User > check "Enable token" and generate new access token. The token will be used to authenticate in API methods  
or
  - **b) login and password**  
Use your API User credentials to authenticate in API methods

### EXAMPLES OF AUTHENTICATION:

- **with access token**

`https://url-of-smseagle/http_api/send_sms?access_token=0001gOjC01MH8F2q`

- **with login and password**

`https://url-of-smseagle/http_api/send_sms?login=john&pass=doe`

API credentials created here will be used to authenticate in all API methods (see descriptions below).

## 1. Send SMS: HTTP GET method

### HTTP GET METHOD:

`https://url-of-smseagle/http_api/send_sms`

### PARAMETERS:

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)   |
| login        | your user to login to SMSEagle (see details in point API Authentication)  |
| pass         | your password to login to SMSEagle  |
| to           | recipient telephone number (or numbers separated with comma)  |
| message      | your SMS message  |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time |

|              |   |
|--------------|---|
| highpriority | <i>(optional parameter)</i> 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem  |
| unicode      | <i>(optional parameter)</i> 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)   |
| flash        | <i>(optional parameter)</i> 0 = normal SMS (default), 1 = SMS will be sent as flash message   |
| oid          | <p><i>(optional parameter)</i> This attribute specifies a user-defined unique ID that is assigned to a message-recipient pair. The oid is a varchar (36) that uniquely identifies a message sent to a particular recipient (particular phone number). The value of this ID allows client applications to match incoming reply messages to outgoing messages. If no oid was assigned to the outgoing message this attribute will have a value of null for incoming message.</p> <p>The oid value will be automatically assigned to incoming message only if incoming phone number matches exactly the phone number (including country code) from outgoing message.</p> |
| modem_no     | <i>(optional parameter)</i> sending modem number (only for multimodem devices)  |
| responsetype | <i>(optional parameter)</i> text = format response as text (default), xml = format response as XML object   |
| validity     | <i>(optional parameter)</i> How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max   |
| send_after   | <i>(optional parameter)</i> send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |
| send_before  | <i>(optional parameter)</i> send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)   |

#### EXAMPLES:

`https://url-of-smseagle/http_api/send_sms?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&to=1234567&message=mymessage`

`https://url-of-smseagle/http_api/send_sms?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&to=1234567&message=mymessage&date=201401152132`

`https://url-of-smseagle/http_api/send_sms?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&to=1234567&message=mymessage&highpriority=1`

#### RESPONSE:

Response: **OK; ID=[ID of message in outbox]**

Sample response: OK; ID=297

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <message_id>[ID of message in outbox]</message_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <message_id>297</message_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

*Important notice: You must encode URL before sending it to gateway if you use national characters in SMS message text.*

## 2. Send SMS: JSONRPC method

#### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

#### PARAMETERS:

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)   |
| login        | your user to login to SMSEagle (see details in point API Authentication)  |
| pass         | your password to login to SMSEagle  |
| to           | recipient telephone number (or numbers separated with comma)  |
| message      | your SMS message  |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time |

|              |  |
|--------------|--|
| highpriority | <i>(optional parameter)</i> 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem   |
| unicode      | <i>(optional parameter)</i> 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)  |
| flash        | <i>(optional parameter)</i> 0 = normal SMS (default), 1 = SMS will be sent as flash message  |
| oid          | <p><i>(optional parameter)</i> This attribute specifies a user-defined unique ID that is assigned to a message-recipient pair. The oid is a varchar(36) that uniquely identifies a message sent to a particular recipient (particular phone number). The value of this ID allows client applications to match incoming reply messages to outgoing messages. If no oid was assigned to the outgoing message this attribute will have a value of null for incoming message.</p> <p>The oid value will be automatically assigned to incoming message only if incoming phone number matches exactly the phone number (including country code) from outgoing message.</p> |
| modem_no     | <i>(optional parameter)</i> sending modem number (only for multimodem devices)   |
| responsetype | <i>(optional parameter)</i> simple = format response as simple object with one result field (default), extended = format response as extended JSON object  |
| validity     | <i>(optional parameter)</i> How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max  |
| send_after   | <i>(optional parameter)</i> send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)   |
| send_before  | <i>(optional parameter)</i> send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |

#### SAMPLE BODY:

```
{
  "method": "sms.send_sms",
  "params": {
    "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq",
    "to": "481234567",
    "message": "My message"
  }
}
or
{
  "method": "sms.send_sms",
  "params": {
    "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq",
    "to": "481234567",
    "message": "My message",
    "date": "201401152132"
  }
}
or
{
  "method": "sms.send_sms",
  "params": {
    "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq",
    "to": "481234567",
    "message": "My message",
    "highpriority": "1"
  }
}
```

#### RESPONSE:

Response: {"result": "OK; ID=[ID of message in outbox]"}

Sample response: {"result": "OK; ID=297"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong parameters"}

## RESPONSE (EXTENDED):

Response:

```
{"result": {"message_id": "[ID of message in outbox]", "status": "ok"}}
```

Sample response: {"result": {"message\_id": "748", "status": "ok"}}

Sample response when parameter "to" contains multiple phone numbers:

```
{"result": [{"message_id": "3643", "status": "ok"}, {"message_id": "3644", "status": "ok"}, {"message_id": "3645", "status": "ok"}, {"message_id": "3646", "status": "ok"}, {"message_id": "3647", "status": "ok"}]}
```

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong parameters", "status": "error"}}
```

## 3. Send SMS to a group: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/send\\_togroup](https://url-of-smseagle/http_api/send_togroup)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| groupname    | group name defined in your SMSEagle Phonebook. The group must be defined as Public   |
| message      | your SMS message   |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time  |
| highpriority | (optional parameter) 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem  |
| unicode      | (optional parameter) 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)   |
| flash        | (optional parameter) 0 = normal SMS (default), 1 = SMS will be sent as flash message   |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object   |
| validity     | (optional parameter) How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max |

|             |  |
|-------------|--|
| send_after  | (optional parameter) send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |
| send_before | (optional parameter) send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second) |

#### EXAMPLES:

`https://url-of-smseagle/http_api/send_togroup?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&groupname=admins&message=mymessage`

`https://url-of-smseagle/http_api/send_togroup?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&groupname=admins&message=mymessage&date=201401152132`

`https://url-of-smseagle/http_api/send_togroup?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&groupname=admins&message=mymessage&highpriority=1`

#### RESPONSE:

Response: **OK; ID=[ID of message in outbox]**

Sample response: OK; ID=297

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <message_id>[ID of message in outbox]</message_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <message_id>297</message_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
```

```
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 4. Send SMS to a group: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| groupname    | group name defined in your SMSEagle Phonebook. The group must be defined as Public   |
| message      | your SMS message   |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time  |
| highpriority | (optional parameter) 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem  |
| unicode      | (optional parameter) 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)   |
| flash        | (optional parameter) 0 = normal SMS (default), 1 = SMS will be sent as flash message   |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object   |
| validity     | (optional parameter) How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max |
| send_after   | (optional parameter) send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |
| send_before  | (optional parameter) send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)   |

EXAMPLES:

```
{"method": "sms.send_togroup",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq", "groupname": "admins", "message": "mymessage"}}
```

```

or
{"method": "sms.send_togroup",
"params": {"access_token": "0005g0jCOLMH8F2BPo8mWqcGzycVHRLq", "groupname": "admins", "message": "mymessage", "date": "201401152132"} }
or
{"method": "sms.send_togroup",
"params": {"access_token": "0005g0jCOLMH8F2BPo8mWqcGzycVHRLq", "groupname": "admins", "message": "mymessage", "highpriority": "1"} }

```

#### RESPONSE:

**Response:** {"result": "OK; ID=[ID of message in outbox]"}

**Sample response:** {"result": "OK; ID=[297]"}

**Response (when wrong logindata):** {"result": "Invalid login or password"}

**Response (when wrong access token):** {"result": "Invalid access token"}

**Response (when wrong parameters):** {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

**Response:**

```
{"result": {"message_id": "[ID of message in outbox]", "status": "ok"} }
```

**Sample response:** {"result": {"message\_id": "748", "status": "ok"} }

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"} }
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"} }
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong parameters", "status": "error"} }
```

## 5. Send SMS to contact: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/send\\_tocontact](https://url-of-smseagle/http_api/send_tocontact)

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)   |
| login        | your user to login to SMSEagle (see details in point API Authentication)  |
| pass         | your password to login to SMSEagle  |
| contactname  | contact name (or names separated by comma) defined in your SMSEagle Phonebook. Contacts must be defined as Public   |
| message      | your SMS message  |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time |

|              |   |
|--------------|---|
| highpriority | <i>(optional parameter)</i> 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem  |
| unicode      | <i>(optional parameter)</i> 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)   |
| flash        | <i>(optional parameter)</i> 0 = normal SMS (default), 1 = SMS will be sent as flash message   |
| modem_no     | <i>(optional parameter)</i> sending modem number (only for multimodem devices)  |
| responsetype | <i>(optional parameter)</i> text = format response as text (default), xml = format response as XML object   |
| validity     | <i>(optional parameter)</i> How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max |
| send_after   | <i>(optional parameter)</i> send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |
| send_before  | <i>(optional parameter)</i> send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)   |

#### EXAMPLES:

`https://url-of-smseagle/http_api/send_tocontact?`  
`access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contactname=johndoe&message=mymessage`

`https://url-of-smseagle/http_api/send_tocontact?`  
`access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contactname=johndoe&message=mymessage&date=201401152132`

`https://url-of-smseagle/http_api/send_tocontact?`  
`access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contactname=johndoe&message=mymessage&highpriority=1`

#### RESPONSE:

Response: **OK; ID=[ID of message in outbox]**

Sample response: OK; ID=297

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when contact doesn't exist): **Invalid contact name – [contact\_name]**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
<message_id>[ID of message in outbox]</message_id>
<status>ok</status>
```

```
</xml>
```

Sample response:

```
<xml>
  <message_id>297</message_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when contact doesn't exist):

```
<xml>
  <error_text>Invalid contact name – [contact_name]</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 6. Send SMS to contact: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)   |
| login        | your user to login to SMSEagle (see details in point API Authentication)  |
| pass         | your password to login to SMSEagle  |
| contactname  | contact name defined in your SMSEagle Phonebook. The contact must be defined as Public  |
| message      | your SMS message  |
| date         | (optional parameter) date and time in format YYYYmmDDHHMM (YYYY – year, mm – month, DD – day, HH – hour, MM – minute). If this parameter is not null SMS will be scheduled for sending at the given date and time |
| highpriority | (optional parameter) 0 = normal priority, 1 = SMS will have higher priority in Outbox queue when processed by GSM-modem   |

|              |   |
|--------------|---|
| unicode      | <i>(optional parameter)</i> 0 = no Unicode encoding (default), 1 = SMS will be encoded using Unicode (you can send national characters)   |
| flash        | <i>(optional parameter)</i> 0 = normal SMS (default), 1 = SMS will be sent as flash message   |
| modem_no     | <i>(optional parameter)</i> sending modem number (only for multimodem devices)  |
| responsetype | <i>(optional parameter)</i> simple = format response as simple object with one result field (default), extended = format response as extended JSON object   |
| validity     | <i>(optional parameter)</i> How long will be the message valid. If message expires before it is received by a phone, the message will be discarded by cellular network. Acceptable parameter values: 5m, 10m, 30m, 1h, 2h, 4h, 12h, 1d, 2d, 5d, 1w, 2w, 4w, max. Default value: max |
| send_after   | <i>(optional parameter)</i> send a message after specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)  |
| send_before  | <i>(optional parameter)</i> send a message before specified time. It can be used to prevent messages from being sent at night. Format: HH:MM:SS (HH – hour, MM – minute, SS – second)   |

#### EXAMPLES:

```
{ "method": "sms.send_tocontact",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "contactname": "johndoe", "message": "mymessage" } }
or
{ "method": "sms.send_tocontact",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "contactname": "johndoe", "message": "mymessage", "date": "201401152132" } }
or
{ "method": "sms.send_tocontact",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "contactname": "johndoe", "message": "mymessage", "highpriority": "1" } }
```

#### RESPONSE:

Response: {"result": "OK; ID=[ID of message in outbox]"}

Sample response: {"result": "OK; ID=[297]"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when contact doesn't exist): {"result": "Invalid contact name - contact\_name"]"}

Response (when wrong parameters): {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

Response:

```
{"result": { "message_id": "[ID of message in outbox]", "status": "ok" } }
```

Sample response: {"result": { "message\_id": "748", "status": "ok" } }

```

Response (when wrong logindata):
{"result": {"error_text": "Invalid login or password", "status": "error"}}

Response (when wrong access token):
{"result": {"error_text": "Invalid access token", "status": "error"}}

Response (when contact doesn't exist):
{"result": {"error_text": "Invalid contact name - contact_name]", "status": "error"}}

Response (when wrong parameters):
{"result": {"error_text": "Wrong parameters", "status": "error"}}

```

## 7. Send USSD code: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/send\\_ussd](https://url-of-smseagle/http_api/send_ussd)

#### Parameters:

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| to           | USSD code (urlencoded)   |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)                            |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/send\\_ussd?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&to=%2A101%23](https://url-of-smseagle/http_api/send_ussd?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&to=%2A101%23)

#### RESPONSE:

Response: **OK; ID=[ID of message in outbox]**

Sample response: OK; ID=297

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```

<xml>
  <message_id>[ID of message in outbox]</message_id>
  <status>ok</status>
</xml>

```

Sample response:

```
<xml>
  <message_id>297</message_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

*Important notice: You must urlencode USSD code before sending it to gateway. Response from GSM/3G network will show up in device Inbox folder.*

## 8. Send USSD code: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

Parameters:

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| to           | USSD code  |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)                            |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

SAMPLE BODY:

```
{"method": "sms.send_ussd",
"params": {"access_token": "0005g0jC01MH8F2BPo8mWqcGzyCVHRLq", "to": "*101#"
"} }
```

#### RESPONSE:

Response: {"result": "OK; ID=[ID of message in outbox]"}  
Sample response: {"result": "OK; ID=297"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

Response:

{"result": {"message\_id": "[ID of message in outbox]", "status": "ok"}}

Sample response: {"result": {"message\_id": "748", "status": "ok"}}

Response (when wrong logindata):

{"result": {"error\_text": "Invalid login or password", "status": "error"}}

Response (when wrong access token):

{"result": {"error\_text": "Invalid access token", "status": "error"}}

Response (when wrong parameters):

{"result": {"error\_text": "Wrong parameters", "status": "error"}}

*Important notice: Response from GSM/3G network will show up in device Inbox folder.*

## 9. Send binary SMS: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/send\\_binary\\_sms](https://url-of-smseagle/http_api/send_binary_sms)

#### PARAMETERS:

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| to           | recipient telephone number (or numbers separated with comma)                                       |
| udh          | (optional parameter) UDH header for the message (in hex format)                                    |
| data         | binary message (in hex format)   |
| class        | (optional parameter) message class   |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)                            |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/send\\_binary\\_sms?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&to=1234567&udh=0605040B8423F0&data=EA0601AE02056A0045C60C03777772E736D736561676C652E657500080103534D534561676C65000101](https://url-of-smseagle/http_api/send_binary_sms?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&to=1234567&udh=0605040B8423F0&data=EA0601AE02056A0045C60C03777772E736D736561676C652E657500080103534D534561676C65000101)

#### [RESPONSE:](#)

Response: **OK; ID=[ID of message in outbox]**

Sample response: OK; ID=297

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong or missing >>udh<< parameter**

Response (when wrong parameters): **Wrong or missing >>data<< parameter**

#### [RESPONSE \(XML\):](#)

Response:

```
<xml>
  <message_id>[ID of message in outbox]</message_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <message_id>297</message_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text> Wrong or missing >>udh<< parameter </error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text> Wrong or missing >>data<< parameter </error_text>
  <status>error</status>
</xml>
```

## 10. Send binary SMS: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

PARAMETERS:

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| to           | recipient telephone number (or numbers separated with comma)   |
| udh          | (optional parameter) UDH header for the message (in hex format)  |
| data         | binary message (in hex format)   |
| class        | (optional parameter) message class   |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

EXAMPLES:

```
{ "method": "sms.send_binary_sms",
  "params": { "access_token": "0005g0jC0lMH8F2BPo8mWqcGzycVHRLq", "to": "1234567", "udh": "0605040B8423F0", "data": "EA0601AE02056A0045C60C03777772E736D736561676C652E657500080103534D534561676C65000101" } }
```

RESPONSE:

Response: {"result": "OK; ID=[ID of message in outbox]"}

Sample response: {"result": "OK; ID=297"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong or missing >>udh<< parameter"}

Response (when wrong parameters): {"result": "Wrong or missing >>data<< parameter"}

RESPONSE (EXTENDED):

Response:

```
{"result": { "message_id": "[ID of message in outbox]", "status": "ok" } }
```

Sample response: {"result": { "message\_id": "748", "status": "ok" } }

Response (when wrong logindata):

```
{"result": { "error_text": "Invalid login or password", "status": "error" } }
```

Response (when wrong access token):

```
{"result": { "error_text": "Invalid access token", "status": "error" } }
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>udh<< parameter", "status": "error"}}
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>data<< parameter", "status": "error"}}
```

## 11. Read SMS: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/read\\_sms](https://url-of-smseagle/http_api/read_sms)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| folder       | one of the following: inbox, outbox, sentitems   |
| idfrom       | (optional parameter) minimal message-id  |
| idto         | (optional parameter) maximum message-id  |
| from         | (optional parameter) telephone number of SMS sender (for inbox)  |
| to           | (optional parameter) telephone number of SMS receiver (for sentitems)  |
| datefrom     | (optional parameter) date and time in format YYYYmmDDHHMMSS (YYYY – year, mm – month, DD – day, HH – hour, MM – minutes, SS – seconds). Show only messages sent/received on this date/time and later   |
| dateto       | (optional parameter) date and time in format YYYYmmDDHHMMSS (YYYY – year, mm – month, DD – day, HH – hour, MM – minutes, SS – seconds). Show only messages sent/received on this date/time and earlier |
| limit        | (optional parameter) how many messages to show   |
| unread       | (optional parameter) 1 = show only unread messages   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object   |
| createdby    | (optional parameter) username or email (if message was sent via Email to SMS) of sending user  |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)  |

### EXAMPLES:

Show all messages from inbox:

```
https://url-of-smseagle/http\_api/read\_sms?  
access_token=0005gOjC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox
```

Show all unread messages from inbox:

```
https://url-of-smseagle/http\_api/read\_sms?  
access_token=0005gOjC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox&unread=1
```

Show messages from sentitems folder with id=1234 to 1236:  
[https://url-of-smseagle/http\\_api/read\\_sms?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=sentitems&idfrom=1234&idto=1236](https://url-of-smseagle/http_api/read_sms?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=sentitems&idfrom=1234&idto=1236)

Show messages from inbox folder with sender phone number +481234567:  
[https://url-of-smseagle/http\\_api/read\\_sms?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=inbox&from=+481234567](https://url-of-smseagle/http_api/read_sms?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=inbox&from=+481234567)

Show messages from sentitems folder with receiver phone number 7654321 and datetime from 2014-12-24 08:10:00 to 2014-12-31 23:59:59:  
[https://url-of-smseagle/http\\_api/read\\_sms?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=sentitems&to=7654321&datefrom=20141224081000&dateto=20141231235959](https://url-of-smseagle/http_api/read_sms?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&folder=sentitems&to=7654321&datefrom=20141224081000&dateto=20141231235959)

#### RESPONSE:

Sample responses: [inbox folder](#), [sentitems folder](#)

Response (when no data): **No data to display**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Sample response (inbox folder):

```
<xml>
  <messages>
    <item>
      <UpdatedInDB>2018-07-17 15:11:31</UpdatedInDB>
      <ReceivingDateTime>2018-07-17 15:04:04</ReceivingDateTime>
      <Text>005400650073007400200031</Text>
      <SenderNumber>+48123456789</SenderNumber>
      <Coding>Default_No_Compression</Coding>
      <UDH></UDH>
      <SMSCNumber>+48790998250</SMSCNumber>
      <Class>-1</Class>
      <TextDecoded>Test 1</TextDecoded>
      <ID>124</ID>
      <RecipientID>smseagle1</RecipientID>
      <Processed>t</Processed>
      <id_folder>1</id_folder>
      <readed>true</readed>
      <oid></oid>
      <Status>0</Status>
    </item>
    <item>
      <UpdatedInDB>2018-07-17 15:11:31</UpdatedInDB>
      <ReceivingDateTime>2018-07-17 15:04:10</ReceivingDateTime>
      <Text>005400650073007400200032</Text>
      <SenderNumber>+48123456788</SenderNumber>
      <Coding>Default_No_Compression</Coding>
```

```

<UDH></UDH>
<SMSNumber>+48790998250</SMSNumber>
<Class>-1</Class>
<TextDecoded>Test 2</TextDecoded>
<ID>125</ID>
<RecipientID>smseagle1</RecipientID>
<Processed>t</Processed>
<id_folder>1</id_folder>
<readed>true</readed>
<oid>5208facc-5912-4d21-8d31-7f830cf8f24e</oid>
<Status>0</Status>
</item>
<item>
    <UpdatedInDB>2018-07-17 15:11:31</UpdatedInDB>
    <ReceivingDateTime>2018-07-17 15:05:49</ReceivingDateTime>

<Text>004C006F00720065006D00200069007000730075006D00200064006F006C006F0
072002000730069007400200061006D00650074002C00200063006F006E007300650063
00740065007400750072002000610064006900700069007300630069006E00670020006
5006C00690074002E002000430072006100730020006600650072006D0065006E007400
75006D00200075006C006C0061006D0063006F007200700065007200200065006700650
073007400610073002E0020004E0075006C006C006100200070006C0061006300650072
00610074002000660069006E006900620075007300200064006F006C006F0072002C002
0006D0061006C0065007300750061006400610020007600610072006900750073002000
6C006900670075006C0061002000680065006E006400720065</Text>
    <SenderNumber>+48123456787</SenderNumber>
    <Coding>Default_No_Compression</Coding>
    <UDH>050003590301</UDH>
    <SMSNumber>+48790998250</SMSNumber>
    <Class>-1</Class>
        <TextDecoded>Lorem ipsum dolor sit amet, consectetur
adipiscing elit. Cras fermentum ullamcorper egestas. Nulla placerat
finibus dolor, malesuada varius ligula hendrerit sed. Nullam nisl
sapien, molestie rhoncus orci vel, viverra luctus ipsum. Praesent
maximus luctus orci. Vestibulum lacus dui, vestibulum ac aliquam eget,
ultrices et mi. In ac felis urna. Phasellus eget leo a leo congue
ultricies. Donec tincidunt volutpat arcu a commodo</TextDecoded>
    <ID>126</ID>
    <RecipientID>smseagle1</RecipientID>
    <Processed>t</Processed>
    <id_folder>1</id_folder>
    <readed>true</readed>
    <oid></oid>
    <Status>0</Status>
</item>
</messages>
<status>ok</status>
</xml>

```

#### Sample response (sentitems folder):

```

<xml>
    <messages>
        <item>
            <UpdatedInDB>2018-06-07 11:29:56</UpdatedInDB>
            <InsertIntoDB>2018-06-07 11:29:43</InsertIntoDB>
            <SendingDateTime>2018-06-07 11:29:56</SendingDateTime>
            <DeliveryDateTime>2018-06-07 11:30:05</DeliveryDateTime>
            <Text>0074006500730074</Text>
        </item>
    </messages>
</xml>

```

```

<DestinationNumber>123456789</DestinationNumber>
<Coding>Default_No_Compression</Coding>
<UDH></UDH>
<SMSCNumber>+48501200777</SMSCNumber>
<Class>-1</Class>
<TextDecoded>test</TextDecoded>
<ID>456</ID>
<SenderID>smseagle1</SenderID>
<SequencePosition>1</SequencePosition>
<Status>DeliveryOK</Status>
<StatusError>-1</StatusError>
<TPMR>116</TPMR>
<RelativeValidity>255</RelativeValidity>
<CreatorID>admin</CreatorID>
<id_folder>3</id_folder>
<StatusCode>-1</StatusCode>
</item>
<item>
    <UpdatedInDB>2018-07-13 11:40:45</UpdatedInDB>
    <InsertIntoDB>2018-07-13 11:40:40</InsertIntoDB>
    <SendingDateTime>2018-07-13 11:40:45</SendingDateTime>
    <DeliveryDateTime></DeliveryDateTime>
    <Text></Text>
    <DestinationNumber>*101#</DestinationNumber>
    <Coding>8bit</Coding>
    <UDH></UDH>
    <SMSCNumber>+48501200777</SMSCNumber>
    <Class>127</Class>
    <TextDecoded></TextDecoded>
    <ID>525</ID>
    <SenderID>smseagle1</SenderID>
    <SequencePosition>1</SequencePosition>
    <Status>SendingOK</Status>
    <StatusError>-1</StatusError>
    <TPMR>-1</TPMR>
    <RelativeValidity>255</RelativeValidity>
    <CreatorID>admin</CreatorID>
    <id_folder>3</id_folder>
    <StatusCode>-1</StatusCode>
</item>
<item>
    <UpdatedInDB>2018-07-18 14:25:41</UpdatedInDB>
    <InsertIntoDB>2018-07-18 14:25:23</InsertIntoDB>
    <SendingDateTime>2018-07-18 14:25:28</SendingDateTime>
    <DeliveryDateTime>2018-07-18 14:25:28</DeliveryDateTime>
    <Text>0054006500730074002000740065007300740031</Text>
    <DestinationNumber>+48123456789</DestinationNumber>
    <Coding>Default_No_Compression</Coding>
    <UDH></UDH>
    <SMSCNumber>+48601000310</SMSCNumber>
    <Class>-1</Class>
    <TextDecoded>Test test1</TextDecoded>
    <ID>574</ID>
    <SenderID>smseagle1</SenderID>
    <SequencePosition>1</SequencePosition>
    <Status>DeliveryOK</Status>
    <StatusError>0</StatusError>
    <TPMR>84</TPMR>
    <RelativeValidity>255</RelativeValidity>
    <CreatorID>admin</CreatorID>

```

```

        <id_folder>3</id_folder>
        <StatusCode>-1</StatusCode>
    </item>
    <item>
        <UpdatedInDB>2018-07-18 14:27:13</UpdatedInDB>
        <InsertIntoDB>2018-07-18 14:27:03</InsertIntoDB>
        <SendingDateTime>2018-07-18 14:27:13</SendingDateTime>
        <DeliveryDateTime></DeliveryDateTime>

<Text>00540065007300740020007700690074006800200075006E00690063006F00640
06500200065006E0063006F00640069006E0067003A00200105014200F30119017A0107
</Text>
        <DestinationNumber>123456788</DestinationNumber>
        <Coding>Unicode_No_Compression</Coding>
        <UDH></UDH>
        <SMSCNumber>+48601000310</SMSCNumber>
        <Class>-1</Class>
        <TextDecoded>Test with unicode encoding:
ąłóęźć</TextDecoded>
        <ID>576</ID>
        <SenderID>smseagle2</SenderID>
        <SequencePosition>1</SequencePosition>
        <Status>SendingOK</Status>
        <StatusError>-1</StatusError>
        <TPMR>86</TPMR>
        <RelativeValidity>255</RelativeValidity>
        <CreatorID>admin</CreatorID>
        <id_folder>3</id_folder>
        <StatusCode>-1</StatusCode>
    </item>
    <item>
        <UpdatedInDB>2018-07-18 14:27:36</UpdatedInDB>
        <InsertIntoDB>2018-07-18 14:27:32</InsertIntoDB>
        <SendingDateTime>2018-07-18 14:27:36</SendingDateTime>
        <DeliveryDateTime></DeliveryDateTime>

<Text>00540065007300740020006F006600200066006C0061007300680020006D00650
0730073006100670065</Text>
        <DestinationNumber>123456788</DestinationNumber>
        <Coding>Default_No_Compression</Coding>
        <UDH></UDH>
        <SMSCNumber>+48601000310</SMSCNumber>
        <Class>0</Class>
        <TextDecoded>Test of flash message</TextDecoded>
        <ID>577</ID>
        <SenderID>smseagle2</SenderID>
        <SequencePosition>1</SequencePosition>
        <Status>SendingOK</Status>
        <StatusError>-1</StatusError>
        <TPMR>87</TPMR>
        <RelativeValidity>255</RelativeValidity>
        <CreatorID>admin</CreatorID>
        <id_folder>3</id_folder>
        <StatusCode>-1</StatusCode>
    </item>
    <item>
        <UpdatedInDB>2018-07-18 14:29:29</UpdatedInDB>
        <InsertIntoDB>2018-07-18 14:28:46</InsertIntoDB>
        <SendingDateTime>2018-07-18 14:29:29</SendingDateTime>
        <DeliveryDateTime></DeliveryDateTime>

```

```

<Text>00540065007300740020007700690074006800200062006100640020007000680
06F006E00650020006E0075006D006200650072</Text>
    <DestinationNumber>11</DestinationNumber>
    <Coding>Default_No_Compression</Coding>
    <UDH></UDH>
    <SMSCNumber></SMSCNumber>
    <Class>-1</Class>
    <TextDecoded>Test with bad phone number</TextDecoded>
    <ID>578</ID>
    <SenderID>smseagle2</SenderID>
    <SequencePosition>1</SequencePosition>
    <Status>SendingError</Status>
    <StatusError>-1</StatusError>
    <TPMR>-1</TPMR>
    <RelativeValidity>255</RelativeValidity>
    <CreatorID>admin</CreatorID>
    <id_folder>3</id_folder>
    <StatusCode>21</StatusCode>
</item>
</messages>
<status>ok</status>
</xml>

```

Response (when no data):

```

<xml>
    <error_text>No data to display</error_text>
    <status>error</status>
</xml>

```

Response (when wrong logindata):

```

<xml>
    <error_text>Invalid login or password</error_text>
    <status>error</status>
</xml>

```

Response (when wrong access token):

```

<xml>
    <error_text>Invalid Access token</error_text>
    <status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
    <error_text>Wrong parameters</error_text>
    <status>error</status>
</xml>

```

#### FIELD DESCRIPTION OF RESPONSE DATA – INBOX FOLDER:

| Field             | Data type | Description   |
|-------------------|-----------|---|
| UpdatedInDB       | timestamp | when somebody (software, user) updated the message content or state |
| ReceivingDateTime | timestamp | when SMS was received   |
| Text              | text      | SMS text encoded using hex values                                   |

|              |                        |   |
|--------------|------------------------|---|
| SenderNumber | character varying(30)  | SMS sender number   |
| Coding       | character varying(255) | SMS text coding. Possible values:<br><i>'Default_No_Compression',<br/> 'Unicode_No_Compression',<br/> '8bit',<br/> 'Default_Compression',<br/> 'Unicode_Compression'</i>  |
| UDH          | text                   | User Data Header encoded using hex values   |
| SMSCNumber   | character varying(20)  | SMSC number   |
| Class        | integer                | SMS class (0 is flash SMS, -1 is normal SMS, 127 is USSD)   |
| TextDecoded  | text                   | decoded SMS text  |
| ID           | serial                 | SMS unique identification number  |
| RecipientID  | text                   | which modem received the message<br><i>(for example: smseagle1, smseagle2)</i>  |
| Processed    | boolean                | whether SMS was processed by SMSEagle application   |
| id_folder    | integer                | identification of storage folder. Possible values:<br>1 <i>Inbox</i><br>5 <i>Trash</i><br>11... <i>Custom folder</i>  |
| readed       | text                   | whether SMS was read in GUI or via API  |
| oid          | character varying(36)  | user-defined unique ID that is assigned to a message-recipient pair. The oid uniquely identifies a message sent to a particular recipient (particular phone number).<br><i>More information: see send_sms method description</i>  |
| Status       | integer                | Status of incoming message. Currently only used for USSD messages with following meaning:<br>1 <i>Unknown status.</i><br>2 <i>No action is needed, maybe network initiated USSD.</i><br>3 <i>Reply is expected.</i><br>4 <i>USSD dialog terminated.</i><br>5 <i>Another client replied.</i><br>6 <i>Operation not supported.</i><br>7 <i>Network timeout.</i> |

#### FIELD DESCRIPTION OF RESPONSE DATA – SENTITEMS FOLDER:

| Field             | Data type              | Description   |
|-------------------|------------------------|---|
| UpdatedInDB       | timestamp              | when somebody (software, user) updated the message content or state   |
| InsertIntoDB      | timestamp              | when message was inserted into database   |
| SendingDateTime   | timestamp              | when message has been sent  |
| DeliveryDateTime  | timestamp              | time of receiving a delivery report (if it has been enabled). Null if delivery report was not received.                                       |
| Text              | text                   | SMS text encoded using hex values   |
| DestinationNumber | character varying(30)  | destination number for SMS  |
| Coding            | character varying(255) | SMS text coding. Possible values:<br><i>'Default_No_Compression',<br/> 'Unicode_No_Compression',<br/> '8bit',<br/> 'Default_Compression',</i> |

|                  |                        |  |
|------------------|------------------------|--|
|                  |                        | 'Unicode_Compression'  |
| UDH              | text                   | User Data Header encoded using hex values  |
| SMSCNumber       | character varying(20)  | number of SMSC, which sent SMS   |
| Class            | integer                | SMS class (0 is flash SMS, -1 is normal SMS, 127 is USSD)  |
| TextDecoded      | text                   | decoded SMS text   |
| ID               | serial                 | SMS unique identification number   |
| SenderID         | character varying(255) | which modem sent the message<br><i>(for example: smseagle1, smseagle2)</i>   |
| SequencePosition | integer                | SMS number in SMS sequence   |
| Status           | character varying(255) | <p>Status of message sending. Possible values:</p> <p><i>SendingOK</i></p> <p><i>Message has been sent, waiting for delivery report</i></p> <p><i>SendingOKNoReport</i></p> <p><i>Message has been sent without asking for delivery report</i></p> <p><i>SendingError</i></p> <p><i>Sending has failed</i></p> <p><i>DeliveryOK</i></p> <p><i>Delivery report arrived and reported success</i></p> <p><i>DeliveryFailed</i></p> <p><i>Delivery report arrived and reports failure</i></p> <p><i>DeliveryPending</i></p> <p><i>Delivery report announced pending deliver</i></p> <p><i>DeliveryUnknown</i></p> <p><i>Delivery report reported unknown status</i></p> <p><i>Error</i></p> <p><i>Some other error happened during sending</i></p> <p><i>Notice: some cellular operators return "SendingOK" status instead of "DeliveryOK" for correctly delivered SMS. If you want to check for delivery status, please verify what you receive from your operator or instead use the field DeliveryDateTime.</i></p> |
| StatusError      | integer                | Status of delivery from delivery report message, codes are defined in GSM specification 03.40 section 9.2.3.15 (TP-Status)   |
| TPMR             | integer                | The Message Reference field (TP-MR) as defined in GSM 03.40  |
| RelativeValidity | integer                | SMS relative validity (TP-VP) encoded as defined in GSM 03.40  |
| CreatorID        | text                   | username that created the SMS message  |
| id_folder        | integer                | identification of storage folder. Possible values:<br>3 <i>Sent items</i><br>5 <i>Trash</i><br>11... <i>Custom folder</i>  |
| StatusCode       | integer                | CMS status code (also known as CMS ERROR) received from cellular network.<br>-1 <i>No CMS Error</i><br>>-1 <i>CMS Error occurred. CMS error number is saved in this field.</i>   |

## 12. Read SMS: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| folder       | one of the following: inbox, outbox, sentitems   |
| idfrom       | (optional parameter) minimal message-id  |
| idto         | (optional parameter) maximum message-id  |
| from         | (optional parameter) telephone number of SMS sender (for inbox)  |
| to           | (optional parameter) telephone number of SMS receiver (for sentitems)  |
| datefrom     | (optional parameter) date and time in format YYYYmmDDHHMMSS (YYYY – year, mm – month, DD – day, HH – hour, MM – minutes, SS – seconds). Show only messages sent/received on this date/time and later   |
| dateto       | (optional parameter) date and time in format YYYYmmDDHHMMSS (YYYY – year, mm – month, DD – day, HH – hour, MM – minutes, SS – seconds). Show only messages sent/received on this date/time and earlier |
| limit        | (optional parameter) how many messages to show   |
| unread       | (optional parameter) 1 = show only unread messages   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object   |
| createdby    | (optional parameter) username or email (if message was sent via Email to SMS) of sending user  |
| modem_no     | (optional parameter) sending modem number (only for multimodem devices)  |

### EXAMPLES:

Show all messages from inbox:

```
{"method": "sms.read_sms",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "folder": "inbox"}}
```

Show all unread messages from inbox:

```
{"method": "sms.read_sms",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "folder": "inbox", "unread": "1"}}
```

Show messages from sentitems folder with id=1234 to 1236:

```
{"method": "sms.read_sms",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "folder": "sentitems", "idfrom": "1234", "idto": "1236"}}
```

Show messages from inbox folder with sender phone number +481234567:

```
{"method":"sms.read_sms",
"params": {"access_token":"0005g0jCOLMH8F2BPo8mWqcGzycVHRLq", "folder":"inbox", "from":" 481234567"}}
```

Show messages from sentitems folder with receiver phone number 7654321 and datetime from 2014-12-24 08:10:00 to 2014-12-31 23:59:59:

```
{"method":"sms.read_sms",
"params": {"access_token":"0005g0jCOLMH8F2BPo8mWqcGzycVHRLq", "folder":"sentitems", "to":"7654321", "datefrom":"20141224081000", "dateto":"20141231235959"}}
```

#### RESPONSE:

Sample response (inbox folder):

```
{
  "result": [
    {
      "UpdatedInDB": "2018-07-18 13:56:16",
      "ReceivingDateTime": "2018-07-17 15:04:04",
      "Text": "005400650073007400200031",
      "SenderNumber": "+48123456789",
      "Coding": "Default_No_Compression",
      "UDH": "",
      "SMSCNumber": "+48790998250",
      "Class": "-1",
      "TextDecoded": "Test 1",
      "ID": "124",
      "RecipientID": "smseagle1",
      "Processed": "t",
      "id_folder": "1",
      "readed": "true",
      "oid": "",
      "Status": "0"
    },
    {
      "UpdatedInDB": "2018-07-18 13:56:16",
      "ReceivingDateTime": "2018-07-17 15:04:10",
      "Text": "005400650073007400200032",
      "SenderNumber": "+48123456788",
      "Coding": "Default_No_Compression",
      "UDH": "",
      "SMSCNumber": "+48790998250",
      "Class": "-1",
      "TextDecoded": "Test 2",
      "ID": "125",
      "RecipientID": "smseagle1",
      "Processed": "t",
      "id_folder": "1",
      "readed": "true",
      "oid": "5208facc-5912-4d21-8d31-7f830cf8f24e",
      "Status": "0"
    },
    {
      "UpdatedInDB": "2018-07-18 13:56:16",
      "ReceivingDateTime": "2018-07-17 15:05:49",
      "Text": "
"004C006F00720065006D00200069007000730075006D00200064006F006C006F007200
```

```

2000730069007400200061006D00650074002C00200063006F006E00730065006300740
065007400750072002000610064006900700069007300630069006E006700200065006C
00690074002E002000430072006100730020006600650072006D0065006E00740075006
D00200075006C006C0061006D0063006F00720070006500720020006500670065007300
7400610073002E0020004E0075006C006C006100200070006C006100630065007200610
074002000660069006E006900620075007300200064006F006C006F0072002C0020006D
0061006C00650073007500610064006100200076006100720069007500730020006C006
900670075006C0061002000680065006E006400720065",
    "SenderNumber": "+48123456787",
    "Coding": "Default_No_Compression",
    "UDH": "050003590301",
    "SMSCNumber": "+48790998250",
    "Class": "-1",
    "TextDecoded": "Lorem ipsum dolor sit amet, consectetur
adipiscing elit. Cras fermentum ullamcorper egestas. Nulla placerat
finibus dolor, malesuada varius ligula hendrerit sed. Nullam nisl
sapien, molestie rhoncus orci vel, viverra luctus ipsum. Praesent
maximus luctus orci. Vestibulum lacus dui, vestibulum ac aliquam eget,
ultrices et mi. In ac felis urna. Phasellus eget leo a leo congue
ultricies. Donec tincidunt volutpat arcu a commodo",
    "ID": "126",
    "RecipientID": "smseagle1",
    "Processed": "t",
    "id_folder": "1",
    "readed": "true",
    "oid": "",
    "Status": "0"
}
]
}

```

#### Sample response (sentitems folder):

```

{
    "result": [
        {
            "UpdatedInDB": "2018-06-07 11:29:56",
            "InsertIntoDB": "2018-06-07 11:29:43",
            "SendingDateTime": "2018-06-07 11:29:56",
            "DeliveryDateTime": "2018-06-07 11:30:05",
            "Text": "0074006500730074",
            "DestinationNumber": "+48123456789",
            "Coding": "Default_No_Compression",
            "UDH": "",
            "SMSCNumber": "+48501200777",
            "Class": "-1",
            "TextDecoded": "test",
            "ID": "456",
            "SenderID": "smseagle1",
            "SequencePosition": "1",
            "Status": "DeliveryOK",
            "StatusError": "-1",
            "TPMR": "116",
            "RelativeValidity": "255",
            "CreatorID": "admin",
            "id_folder": "3",
            "StatusCode": "-1"
        },
        {
            "UpdatedInDB": "2018-07-13 11:40:45",

```

```

    "InsertIntoDB": "2018-07-13 11:40:40",
    "SendingDateTime": "2018-07-13 11:40:45",
    "DeliveryDateTime": null,
    "Text": "",
    "DestinationNumber": "*101#",
    "Coding": "8bit",
    "UDH": "",
    "SMSCNumber": "+48501200777",
    "Class": "127",
    "TextDecoded": "",
    "ID": "525",
    "SenderID": "smseagle1",
    "SequencePosition": "1",
    "Status": "SendingOK",
    "StatusError": "-1",
    "TPMR": "-1",
    "RelativeValidity": "255",
    "CreatorID": "admin",
    "id_folder": "3",
    "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:25:41",
    "InsertIntoDB": "2018-07-18 14:25:23",
    "SendingDateTime": "2018-07-18 14:25:28",
    "DeliveryDateTime": "2018-07-18 14:25:28",
    "Text": "0054006500730074002000740065007300740031",
    "DestinationNumber": "+48123456788",
    "Coding": "Default_No_Compression",
    "UDH": "",
    "SMSCNumber": "+48601000310",
    "Class": "-1",
    "TextDecoded": "Test test1",
    "ID": "574",
    "SenderID": "smseagle1",
    "SequencePosition": "1",
    "Status": "DeliveryOK",
    "StatusError": "0",
    "TPMR": "84",
    "RelativeValidity": "255",
    "CreatorID": "admin",
    "id_folder": "3",
    "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:27:13",
    "InsertIntoDB": "2018-07-18 14:27:03",
    "SendingDateTime": "2018-07-18 14:27:13",
    "DeliveryDateTime": null,
    "Text": "00540065007300740020007700690074006800200075006E00690063006F0064006500
200065006E0063006F00640069006E0067003A00200105014200F30119017A0107",
    "DestinationNumber": "123456788",
    "Coding": "Unicode_No_Compression",
    "UDH": "",
    "SMSCNumber": "+48601000310",
    "Class": "-1",
    "TextDecoded": "Test with unicode encoding: ałóężć",
    "ID": "576",
    "SenderID": "smseagle1",

```

```

        "SequencePosition": "1",
        "Status": "SendingOK",
        "StatusError": "-1",
        "TPMR": "86",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",
        "StatusCode": "-1"
    },
    {
        "UpdatedInDB": "2018-07-18 14:27:36",
        "InsertIntoDB": "2018-07-18 14:27:32",
        "SendingDateTime": "2018-07-18 14:27:36",
        "DeliveryDateTime": null,
        "Text":
"00540065007300740020006F006600200066006C0061007300680020006D0065007300
73006100670065",
        "DestinationNumber": "123456788",
        "Coding": "Default_No_Compression",
        "UDH": "",
        "SMSCNumber": "+48601000310",
        "Class": "0",
        "TextDecoded": "Test of flash message",
        "ID": "577",
        "SenderID": "smseagle1",
        "SequencePosition": "1",
        "Status": "SendingOK",
        "StatusError": "-1",
        "TPMR": "87",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",
        "StatusCode": "-1"
    },
    {
        "UpdatedInDB": "2018-07-18 14:29:29",
        "InsertIntoDB": "2018-07-18 14:28:46",
        "SendingDateTime": "2018-07-18 14:29:29",
        "DeliveryDateTime": null,
        "Text":
"0054006500730074002000770069007400680020006200610064002000700068006F00
6E00650020006E0075006D006200650072",
        "DestinationNumber": "11",
        "Coding": "Default_No_Compression",
        "UDH": "",
        "SMSCNumber": "",
        "Class": "-1",
        "TextDecoded": "Test with bad phone number",
        "ID": "578",
        "SenderID": "smseagle1",
        "SequencePosition": "1",
        "Status": "SendingError",
        "StatusError": "-1",
        "TPMR": "-1",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",
        "StatusCode": "21"
    }
]

```

```
}
```

Response (when no data): {"result": "No data to display"}  
Response (when wrong logindata): {"result": "Invalid login or password"}  
Response (when wrong access token): {"result": "Invalid access token"}  
Response (when wrong parameters): {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

Sample response (inbox folder):

```
{
    "result": {
        "messages": [
            {
                "UpdatedInDB": "2018-07-18 14:06:06",
                "ReceivingDateTime": "2018-07-17 15:04:04",
                "Text": "005400650073007400200031",
                "SenderNumber": "+48123456789",
                "Coding": "Default_No_Compression",
                "UDH": "",
                "SMSCNumber": "+48790998250",
                "Class": "-1",
                "TextDecoded": "Test 1",
                "ID": "124",
                "RecipientID": "smseagle1",
                "Processed": "t",
                "id_folder": "1",
                "readed": "true",
                "oid": "",
                "Status": "0"
            },
            {
                "UpdatedInDB": "2018-07-18 14:06:06",
                "ReceivingDateTime": "2018-07-17 15:04:10",
                "Text": "005400650073007400200032",
                "SenderNumber": "+48123456788",
                "Coding": "Default_No_Compression",
                "UDH": "",
                "SMSCNumber": "+48790998250",
                "Class": "-1",
                "TextDecoded": "Test 2",
                "ID": "125",
                "RecipientID": "smseagle1",
                "Processed": "t",
                "id_folder": "1",
                "readed": "true",
                "oid": "5208facc-5912-4d21-8d31-7f830cf8f24e",
                "Status": "0"
            },
            {
                "UpdatedInDB": "2018-07-18 14:06:06",
                "ReceivingDateTime": "2018-07-17 15:05:49",
                "Text": "004C006F00720065006D00200069007000730075006D00200064006F006C006F0072002000730069007400200061006D00650074002C00200063006F006E00730065006300740

```

```

065007400750072002000610064006900700069007300630069006E006700200065006C
00690074002E002000430072006100730020006600650072006D0065006E00740075006
D00200075006C0061006D0063006F00720070006500720020006500670065007300
7400610073002E0020004E0075006C006C006100200070006C006100630065007200610
074002000660069006E006900620075007300200064006F006C006F0072002C0020006D
0061006C00650073007500610064006100200076006100720069007500730020006C006
900670075006C0061002000680065006E006400720065",
    "SenderNumber": "+48123456787",
    "Coding": "Default_No_Compression",
    "UDH": "050003590301",
    "SMSCNumber": "+48790998250",
    "Class": "-1",
    "TextDecoded": "Lorem ipsum dolor sit amet, consectetur
adipiscing elit. Cras fermentum ullamcorper egestas. Nulla placerat
finibus dolor, malesuada varius ligula hendrerit sed. Nullam nisl
sapien, molestie rhoncus orci vel, viverra luctus ipsum. Praesent
maximus luctus orci. Vestibulum lacus dui, vestibulum ac aliquam eget,
ultrices et mi. In ac felis urna. Phasellus eget leo a leo congue
ultricies. Donec tincidunt volutpat arcu a commodo",
    "ID": "126",
    "RecipientID": "smseagle1",
    "Processed": "t",
    "id_folder": "1",
    "readed": "true",
    "oid": "",
    "Status": "0"
}
],
"status": "ok"
}
}

```

Sample response (sentitems folder):

```
{
  "result": {
    "messages": [
      {
        "UpdatedInDB": "2018-06-07 11:29:56",
        "InsertIntoDB": "2018-06-07 11:29:43",
        "SendingDateTime": "2018-06-07 11:29:56",
        "DeliveryDateTime": "2018-06-07 11:30:05",
        "Text": "0074006500730074",
        "DestinationNumber": "+48123456789",
        "Coding": "Default_No_Compression",
        "UDH": "",
        "SMSCNumber": "+48501200777",
        "Class": "-1",
        "TextDecoded": "test",
        "ID": "456",
        "SenderId": "smseagle1",
        "SequencePosition": "1",
        "Status": "DeliveryOK",
        "StatusError": "-1",
        "TPMR": "116",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",
        "StatusCode": "-1"
      }
    ]
  }
}
```

```

} ,
{
    "UpdatedInDB": "2018-07-13 11:40:45",
    "InsertIntoDB": "2018-07-13 11:40:40",
    "SendingDateTime": "2018-07-13 11:40:45",
    "DeliveryDateTime": null,
    "Text": "",
    "DestinationNumber": "*101#",
    "Coding": "8bit",
    "UDH": "",
    "SMSCNumber": "+48501200777",
    "Class": "127",
    "TextDecoded": "",
    "ID": "525",
    "SenderID": "smseagle1",
    "SequencePosition": "1",
    "Status": "SendingOK",
    "StatusError": "-1",
    "TPMR": "-1",
    "RelativeValidity": "255",
    "CreatorID": "admin",
    "id_folder": "3",
    "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:25:41",
    "InsertIntoDB": "2018-07-18 14:25:23",
    "SendingDateTime": "2018-07-18 14:25:28",
    "DeliveryDateTime": "2018-07-18 14:25:28",
    "Text": "0054006500730074002000740065007300740031",
    "DestinationNumber": "+48123456788",
    "Coding": "Default_No_Compression",
    "UDH": "",
    "SMSCNumber": "+48601000310",
    "Class": "-1",
    "TextDecoded": "Test test1",
    "ID": "574",
    "SenderID": "smseagle1",
    "SequencePosition": "1",
    "Status": "DeliveryOK",
    "StatusError": "0",
    "TPMR": "84",
    "RelativeValidity": "255",
    "CreatorID": "admin",
    "id_folder": "3",
    "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:27:13",
    "InsertIntoDB": "2018-07-18 14:27:03",
    "SendingDateTime": "2018-07-18 14:27:13",
    "DeliveryDateTime": null,
    "Text": "00540065007300740020007700690074006800200075006E00690063006F0064006500
200065006E0063006F00640069006E0067003A00200105014200F30119017A0107",
    "DestinationNumber": "123456788",
    "Coding": "Unicode_No_Compression",
    "UDH": "",
    "SMSCNumber": "+48601000310",
    "Class": "-1",

```

```

    "TextDecoded": "Test with unicode encoding: ałóężć",
    "ID": "576",
    "SenderID": "smseagle1",
    "SequencePosition": "1",
    "Status": "SendingOK",
    "StatusError": "-1",
    "TPMR": "86",
    "RelativeValidity": "255",
    "CreatorID": "admin",
    "id_folder": "3",
    "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:27:36",
    "InsertIntoDB": "2018-07-18 14:27:32",
    "SendingDateTime": "2018-07-18 14:27:36",
    "DeliveryDateTime": null,
    "Text":
"00540065007300740020006F006600200066006C0061007300680020006D0065007300
73006100670065",
        "DestinationNumber": "123456788",
        "Coding": "Default_No_Compression",
        "UDH": "",
        "SMSCNumber": "+48601000310",
        "Class": "0",
        "TextDecoded": "Test of flash message",
        "ID": "577",
        "SenderID": "smseagle1",
        "SequencePosition": "1",
        "Status": "SendingOK",
        "StatusError": "-1",
        "TPMR": "87",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",
        "StatusCode": "-1"
},
{
    "UpdatedInDB": "2018-07-18 14:29:29",
    "InsertIntoDB": "2018-07-18 14:28:46",
    "SendingDateTime": "2018-07-18 14:29:29",
    "DeliveryDateTime": null,
    "Text":
"0054006500730074002000770069007400680020006200610064002000700068006F00
6E00650020006E0075006D006200650072",
        "DestinationNumber": "11",
        "Coding": "Default_No_Compression",
        "UDH": "",
        "SMSCNumber": "",
        "Class": "-1",
        "TextDecoded": "Test with bad phone number",
        "ID": "578",
        "SenderID": "smseagle1",
        "SequencePosition": "1",
        "Status": "SendingError",
        "StatusError": "-1",
        "TPMR": "-1",
        "RelativeValidity": "255",
        "CreatorID": "admin",
        "id_folder": "3",

```

```

        "StatusCode": "21"
    }
],
"status": "ok"
}

```

**Response (when no data):**

```
{"result": {"error_text": "No data to display", "status": "error"}}
```

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>udh<< parameter", "status": "error"}}
```

#### FIELD DESCRIPTION OF RESPONSE DATA – INBOX FOLDER:

| Field             | Data type              | Description  |
|-------------------|------------------------|--|
| UpdatedInDB       | timestamp              | when somebody (software, user) updated the message content or state  |
| ReceivingDateTime | timestamp              | when SMS was received  |
| Text              | text                   | SMS text encoded using hex values  |
| SenderNumber      | character varying(30)  | SMS sender number  |
| Coding            | character varying(255) | SMS text coding. Possible values:<br><i>'Default_No_Compression'</i> ,<br><i>'Unicode_No_Compression'</i> ,<br><i>'8bit'</i> ,<br><i>'Default_Compression'</i> ,<br><i>'Unicode_Compression'</i>                                 |
| UDH               | text                   | User Data Header encoded using hex values  |
| SMSCNumber        | character varying(20)  | SMSC number  |
| Class             | integer                | SMS class (0 is flash SMS, -1 is normal SMS, 127 is USSD)  |
| TextDecoded       | text                   | decoded SMS text   |
| ID                | serial                 | SMS unique identification number   |
| RecipientID       | text                   | which modem received the message<br><i>(for example: smseagle1, smseagle2)</i>   |
| Processed         | boolean                | whether SMS was processed by SMSEagle application  |
| id_folder         | integer                | identification of storage folder. Possible values:<br><i>1 Inbox</i><br><i>5 Trash</i><br><i>11... Custom folder</i>   |
| readed            | text                   | whether SMS was read in GUI or via API   |
| oid               | character varying(36)  | user-defined unique ID that is assigned to a message-recipient pair. The oid uniquely identifies a message sent to a particular recipient (particular phone number).<br><i>More information: see send_sms method description</i> |
| Status            | integer                | Status of incoming message. Currently only used for USSD messages with following meaning:  |

- |   |   |
|---|---|
| 1 | <i>Unknown status.</i>                                    |
| 2 | <i>No action is needed, maybe network initiated USSD.</i> |
| 3 | <i>Reply is expected.</i>                                 |
| 4 | <i>USSD dialog terminated.</i>                            |
| 5 | <i>Another client replied.</i>                            |
| 6 | <i>Operation not supported.</i>                           |
| 7 | <i>Network timeout.</i>                                   |

#### FIELD DESCRIPTION OF RESPONSE DATA – SENTITEMS FOLDER:

| Field             | Data type              | Description   |
|-------------------|------------------------|---|
| UpdatedInDB       | timestamp              | when somebody (software, user) updated the message content or state   |
| InsertIntoDB      | timestamp              | when message was inserted into database   |
| SendingDateTime   | timestamp              | when message has been sent  |
| DeliveryDateTime  | timestamp              | time of receiving a delivery report (if it has been enabled). Null if delivery report was not received.   |
| Text              | text                   | SMS text encoded using hex values   |
| DestinationNumber | character varying(30)  | destination number for SMS  |
| Coding            | character varying(255) | SMS text coding. Possible values:<br><i>'Default_No_Compression'</i> ,<br><i>'Unicode_No_Compression'</i> ,<br><i>'8bit'</i> ,<br><i>'Default_Compression'</i> ,<br><i>'Unicode_Compression'</i>  |
| UDH               | text                   | User Data Header encoded using hex values   |
| SMSCNumber        | character varying(20)  | number of SMSC, which sent SMS  |
| Class             | integer                | SMS class (0 is flash SMS, -1 is normal SMS, 127 is USSD)   |
| TextDecoded       | text                   | decoded SMS text  |
| ID                | serial                 | SMS unique identification number  |
| SenderID          | character varying(255) | which modem sent the message<br><i>(for example: smseagle1, smseagle2)</i>  |
| SequencePosition  | integer                | SMS number in SMS sequence  |
| Status            | character varying(255) | Status of message sending. Possible values:<br><i>SendingOK</i><br><i>Message has been sent, waiting for delivery report</i><br><i>SendingOKNoReport</i><br><i>Message has been sent without asking for delivery report</i><br><i>SendingError</i><br><i> Sending has failed</i><br><i>DeliveryOK</i><br><i> Delivery report arrived and reported success</i><br><i>DeliveryFailed</i><br><i> Delivery report arrived and reports failure</i><br><i>DeliveryPending</i><br><i> Delivery report announced pending deliver</i><br><i>DeliveryUnknown</i><br><i> Delivery report reported unknown status</i><br><i>Error</i><br><i> Some other error happened during sending</i> |

|                  |         |   |
|------------------|---------|---|
|                  |         | <i>Notice: some cellular operators return "SendingOK" status instead of "DeliveryOK" for correctly delivered SMS. If you want to check for delivery status, please verify what values you receive from your operator or instead use the field DeliveryDateTime.</i> |
| StatusError      | integer | Status of delivery from delivery report message, codes are defined in GSM specification 03.40 section 9.2.3.15 (TP-Status)  |
| TPMR             | integer | The Message Reference field (TP-MR) as defined in GSM 03.40   |
| RelativeValidity | integer | SMS relative validity (TP-VP) encoded as defined in GSM 03.40   |
| CreatorID        | text    | username that created the SMS message   |
| id_folder        | integer | identification of storage folder. Possible values:<br>3 Sent items<br>5 Trash<br>11... Custom folder  |
| StatusCode       | integer | CMS status code (also known as CMS ERROR) received from cellular network.<br>-1 No CMS Error<br>>-1 CMS Error occurred. CMS error number is saved in this field.  |

## 13. Delete SMS: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/delete\\_sms](https://url-of-smseagle/http_api/delete_sms)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| folder       | one of the following: inbox, outbox, sentitems   |
| idfrom       | minimal id of message  |
| idto         | maximal id of message  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

Delete message with id=1234 from inbox:

[https://url-of-smseagle/http\\_api/delete\\_sms?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox&idfrom=1234&idto=1234](https://url-of-smseagle/http_api/delete_sms?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox&idfrom=1234&idto=1234)

Delete messages with id 1234 - 1250 from inbox:

[https://url-of-smseagle/http\\_api/delete\\_sms?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox&idfrom=1234&idto=1250](https://url-of-smseagle/http_api/delete_sms?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&folder=inbox&idfrom=1234&idto=1250)

Delete all messages from outbox:  
[https://url-of-smseagle/http\\_api/delete\\_sms?  
access\\_token=0005g0jCOLMH8F2BPo8mWqcGzycVHRLq&folder=outbox&idfrom=1&idto=999999999](https://url-of-smseagle/http_api/delete_sms?access_token=0005g0jCOLMH8F2BPo8mWqcGzycVHRLq&folder=outbox&idfrom=1&idto=999999999)

**RESPONSE:**

Response: **OK**

Response (when delete operation was not successful): **Error**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

**RESPONSE (XML):**

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when delete operation was not successful):

```
<xml>
  <status>error</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

## 14. Delete SMS: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| folder       | one of the following: inbox, outbox, sentitems   |
| idfrom       | minimal id of message  |
| idto         | maximal id of message  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

#### EXAMPLES:

Delete message with id=1234 from inbox:

```
{"method": "sms.delete_sms",
"params": {"access_token": "0005g0jC01MH8F2BPo8mWqcGzycVHRLq", "folder": "inbox", "idfrom": "1234", "idto": "1234"}}
```

Delete messages with id 1234 - 1250 from inbox:

```
{"method": "sms.delete_sms",
"params": {"access_token": "0005g0jC01MH8F2BPo8mWqcGzycVHRLq", "folder": "inbox", "idfrom": "1234", "idto": "1250"}}
```

Delete all messages from outbox:

```
{"method": "sms.delete_sms",
"params": {"access_token": "0005g0jC01MH8F2BPo8mWqcGzycVHRLq", "folder": "outbox", "idfrom": "1", "idto": "999999999"}}
```

#### RESPONSE:

Response: {"result": "OK"}

Response (when delete operation was not successful): {"result": "Error"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

#### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when delete operation was not successful):

```
{"result": {"status": "error"}}
```

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

## 15. Get outgoing queue length: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/get\\_queue\\_length](https://url-of-smseagle/http_api/get_queue_length)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/get\\_queue\\_length?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq](https://url-of-smseagle/http_api/get_queue_length?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq)

#### RESPONSE:

Response: [number of messages in database that wait to be processed by GSM-modem]

Sample response: 7

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <queue_length>
    [number of messages in database that wait to be processed by GSM-modem]
  </queue_length >
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <queue_length>7</queue_length >
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 16. Get outgoing queue length: JSONRPC method

#### HTTP POST METHOD CALL:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

**BODY:**

```
{ "method": "sms.get_queue_length",
"params": { "access_token": "0005g0jCOLMH8F2BPo8mWqcGzycVHRLq" } }
```

**RESPONSE:**

**Response:** { "result": [ number of messages in database that wait to be processed by GSM-modem] }

**Sample response:** { "result": 7 }

**Response:** { "result": "Invalid login or password" }

**Response (when wrong access token):** { "result": "Invalid access token" }

**Response:** { "result": "Wrong parameters" }

**RESPONSE (EXTENDED):**

**Response:**

```
{ "result": { "queue_length": [number of messages in database that wait to be processed by GSM-modem], "status": "ok" } }
```

**Sample response:** { "result": { "queue\_length": "419", "status": "ok" } }

**Response (when wrong logindata):**

```
{ "result": { "error_text": "Invalid login or password", "status": "error" } }
```

**Response (when wrong access token):**

```
{ "result": { "error_text": "Invalid access token", "status": "error" } }
```

**Response (when wrong parameters):**

```
{ "result": { "error_text": "Wrong parameters", "status": "error" } }
```

## 17. Get inbox length: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/get\\_inbox\\_length](https://url-of-smseagle/http_api/get_inbox_length)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

[https://url-of-smseagle/http\\_api/get\\_inbox\\_length?  
access\\_token=0005g0jCOLMH8F2BPo8mWqcGzycVHRLq](https://url-of-smseagle/http_api/get_inbox_length?access_token=0005g0jCOLMH8F2BPo8mWqcGzycVHRLq)

**RESPONSE:**

**Response:** **[number of messages in database Inbox folder]**

Sample response: 3

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <queue_length>
    [number of messages in database Inbox folder]
  </queue_length>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <inbox_length>3</inbox_length>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 18. Get inbox length: JSONRPC method

#### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

#### EXAMPLES:

```
{"method": "sms.get_inbox_length",
"params": {"access_token": "0005gOjCOLMH8F2BPO8mWqcGzycVHRLq"}}
```

#### RESPONSE:

Response: {"result": "[number of messages in database Inbox folder]"}  
Sample response: 3

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

Response:  
{"result": {"inbox\_length": [number of messages in database Inbox folder], "status": "ok"}}

Sample response: {"result": {"inbox\_length": "3", "status": "ok"}}

Response (when wrong logindata):

{"result": {"error\_text": "Invalid login or password", "status": "error"}}

Response (when wrong access token):

{"result": {"error\_text": "Invalid access token", "status": "error"}}

Response (when wrong parameters):

{"result": {"error\_text": "Wrong parameters", "status": "error"}}

## 19. Get sentitems length: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/get\\_inbox\\_length](https://url-of-smseagle/http_api/get_inbox_length)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/get\\_sentitems\\_length?  
access\\_token=0005gOjCOLMH8F2BPO8mWqcGzycVHRLq](https://url-of-smseagle/http_api/get_sentitems_length?access_token=0005gOjCOLMH8F2BPO8mWqcGzycVHRLq)

#### RESPONSE:

Response: [number of messages in database Sentitems folder]

Sample response: 21

Response (when wrong logindata): Invalid login or password

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <sentitems_length>
    [number of messages in database Inbox folder]
  </sentitems_length>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <sentitems_length>21</sentitems_length>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 20. Get sentitems length: JSONRPC method

#### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

#### EXAMPLES:

```
{"method": "sms.get_sentitems_length",
"params": {"access_token": "0005gOjC0lMH8F2BPo8mWqcGzyCVHRLq"}}
```

#### RESPONSE:

Response: {"result": "[number of messages in database Sentitems folder]"}  
Sample response: {"result": "21"}  
Response (when wrong logindata): {"result": "Invalid login or password"}  
Response (when wrong access token): {"result": "Invalid access token"}  
Response (when wrong parameters): {"result": "Wrong parameters"}

#### RESPONSE (EXTENDED):

Response:  
{ "result": { "sentitems\_length": [number of messages in database Sentitems folder], "status": "ok" } }

Sample response: {"result": { "sentitems\_length": "21", "status": "ok" } }

Response (when wrong logindata):  
{ "result": { "error\_text": "Invalid login or password", "status": "error" } }

Response (when wrong access token):  
{ "result": { "error\_text": "Invalid access token", "status": "error" } }

Response (when wrong parameters):  
{ "result": { "error\_text": "Wrong parameters", "status": "error" } }

## 21. Get GSM/3G signal strength: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/get\\_gsmsignal](https://url-of-smseagle/http_api/get_gsmsignal)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| modem_no     | (optional parameter) modem number to be queried (default = 1). Used only in multimodem devices     |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/get\\_gsmsignal?  
access\\_token=0005gOjC01MH8F2BPo8mWqcGzycVHRLq&modem\\_no=1](https://url-of-smseagle/http_api/get_gsmsignal?access_token=0005gOjC01MH8F2BPo8mWqcGzycVHRLq&modem_no=1)

#### RESPONSE:

Response: **GSM/3G signal strength in percent (values between 0-100).** If 3G modem is disconnected from GSM/3G network, method returns -1  
Sample response: 74

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong parameters**

#### RESPONSE (XML):

Response:

```
<xml>
  <signal_strength>
    [GSM signal strength in percent (values between 0-100)]
  </signal_strength>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <signal_strength>74</signal_strength>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong parameters</error_text>
  <status>error</status>
</xml>
```

## 22. Get GSM/3G signal strength: JSONRPC method

#### HTTP POST METHOD CALL:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| modem_no     | (optional parameter) modem number to be queried (default = 1). Used only in multimodem devices   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

**BODY:**

```
{"method":"signal.get_gsmsignal",
"params": {"access_token":"0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq"}}
```

**RESPONSE:**

**Response:** {"result": GSM/3G signal strength in percent: values between 0-100. If 3G modem is disconnected from GSM/3G network, method returns -1}

**Sample response:** {"result":7}

**Response:** {"result": "Invalid login or password"}

**Response (when wrong access token):** {"result": "Invalid access token"}

**Response:** {"result": "Wrong parameters"}

**RESPONSE (EXTENDED):**

**Response:**

```
{"result": {"signal_strength": [number of messages in database Sentitems folder], "status": "ok"}}
```

**Sample response:** {"result": {"signal\_strength": "7", "status": "ok"}}

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

## 23. Phonebook group create: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/group\\_create](https://url-of-smseagle/http_api/group_create)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| groupname    | name for the created group   |
| public       | (optional parameter) 0 = private group, 1 = public group   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

[https://url-of-smseagle/http\\_api/group\\_create?  
access\\_token=0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq&groupname=myusers&public=1](https://url-of-smseagle/http_api/group_create?access_token=0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq&groupname=myusers&public=1)

#### RESPONSE:

Response: **OK; ID=[ID of created group]**

Sample response: OK; ID=5

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong or missing >>groupname<< parameter**

#### RESPONSE (XML):

Response:

```
<xml>
  <group_id>[ID of created group]</group_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <group_id>5</group_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>groupname<< parameter</error_text>
  <status>error</status>
</xml>
```

## 24. Phonebook group create: JSONRPC method

#### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)    |
| login        | your user to login to SMSEagle (see details in point API Authentication) |
| pass         | your password to login to SMSEagle                                       |
| groupname    | name for the created group   |
| public       | (optional parameter) 0 = private group, 1 = public group                 |

|                     |   |
|---------------------|---|
| <b>responsetype</b> | <i>(optional parameter)</i> simple = format response as simple object with one result field (default), extended = format response as extended JSON object |
|---------------------|---|

#### EXAMPLES:

```
{ "method": "phonebook.group_create",
"params": { "access_token": "0005g0jC0lMH8F2BPo8mWqcGzycVHRLq", "groupname": "myusers", "public": "1" } }
```

#### RESPONSE:

Response: {"result": "OK; ID=[ID of created group]"}  
 Sample response: {"result": "OK; ID=5"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong or missing >>groupname<< parameter"}

#### RESPONSE (EXTENDED):

##### Response:

```
{"result": {"group_id": "[ID of created group]", "status": "ok"}}
```

Sample response: {"result": {"group\_id": "748", "status": "ok"}}

##### Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

##### Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

##### Response (when wrong parameters):

```
{"result": {"error_text": "Wrong parameters", "status": "error"}}
```

## 25. Phonebook group read: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/group\\_read](https://url-of-smseagle/http_api/group_read)

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)                                     |
| login        | your user to login to SMSEagle (see details in point API Authentication)                                  |
| pass         | your password to login to SMSEagle  |
| public       | <i>(optional parameter)</i> 0 = private group (default value), 1 = public group                           |
| uid          | <i>(optional parameter)</i> id of user who created the group  |
| responsetype | <i>(optional parameter)</i> text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/group\\_read?  
 access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&public=1&uid=12](https://url-of-smseagle/http_api/group_read?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&public=1&uid=12)

## RESPONSE:

Sample response: [link](#)

Response (when no data): **No data to display**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>uid<< parameter**

**Wrong or missing >>public<< parameter**

## RESPONSE (XML):

Sample response:

```
<xml>
<groups>
  <item>
    <Name>private</Name>
    <ID>2</ID>
    <id_user>2</id_user>
    <is_public>true</is_public>
  </item>
  <item>
    <Name>Everyone</Name>
    <ID>3</ID>
    <id_user>1</id_user>
    <is_public>true</is_public>
  </item>
  <item>
    <Name>work</Name>
    <ID>4</ID>
    <id_user>1</id_user>
    <is_public>true</is_public>
  </item>
</groups>
<status>ok</status>
</xml>
```

Response (when no data):

```
<xml>
  <error_text>No data to display</error_text>
  <status>error</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
```

```

<error_text>Wrong or missing >>uid<< parameter</error_text>
<status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
  <error_text>Wrong or missing >>public<< parameter</error_text>
  <status>error</status>
</xml>

```

## 26. Phonebook group read: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| public       | (optional parameter) 0 = private group (default value), 1 = public group   |
| uid          | (optional parameter) id of user who created the group  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

**EXAMPLES:**

```
{
  "method": "phonebook.group_read",
  "params": {
    "access_token": "0005g0jC0lMH8F2BPo8mWqcGzycVHRLq",
    "public": "1",
    "uid": "12"
  }
}
```

**RESPONSE:**

Sample response:

```
{
  "result": [
    {"Name": "private", "ID": "2", "id_user": "1", "is_public": "true"},
    {"Name": "Everyone", "ID": "3", "id_user": "1", "is_public": "true"},
    {"Name": "work", "ID": "4", "id_user": "2", "is_public": "true"}
  ]
}
```

Response (when no data): {"result": "No data to display"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{
  "result": "Wrong or missing >>uid<< parameter",
  "result": "Wrong or missing >>public<< parameter"
}
```

**RESPONSE (EXTENDED):**

Sample response:

```
{"result": [ {"groups": [
    {"Name": "private", "ID": "2", "id_user": "1", "is_public": "true"}, 
    {"Name": "Everyone", "ID": "3", "id_user": "1", "is_public": "true"}, 
    {"Name": "work", "ID": "4", "id_user": "2", "is_public": "true"} 
], "status": "ok"}}
```

**Response (when no data):**

```
{"result": {"error_text": "No data to display", "status": "error"}}
```

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>uid<< parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong or missing >>public<< parameter", "status": "error"}}
```

## 27. Phonebook group update: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/group\\_update](https://url-of-smseagle/http_api/group_update)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group   |
| groupname    | name for the group   |
| public       | (optional parameter) 0 = private group, 1 = public group   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

[https://url-of-smseagle/http\\_api/group\\_update?access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&group\\_id=2&groupname=myusers&public=1](https://url-of-smseagle/http_api/group_update?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&group_id=2&groupname=myusers&public=1)

**RESPONSE:**

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>groupname<< parameter**

**Wrong or missing >>group\_id<< parameter**

Response (when group\_id is wrong): **Group with the given id does not exists**

**RESPONSE (XML):**

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>groupname<< parameter</error_text>
  <status>error</status>
</xml>

<xml>
  <error_text>Wrong or missing >>group_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when group\_id is wrong):

```
<xml>
  <error_text>Group with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

## 28. Phonebook group update: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)    |
| login        | your user to login to SMSEagle (see details in point API Authentication) |
| pass         | your password to login to SMSEagle                                       |

|              |  |
|--------------|--|
| group_id     | id of existing group   |
| groupname    | name for the group   |
| public       | (optional parameter) 0 = private group, 1 = public group   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

#### EXAMPLES:

```
{ "method": "phonebook.group_update",
  "params": { "access_token": "0005g0jC0lMH8F2BPo8mWqcGzycVHRLq", "group_id": "2", "groupname": "myusers", "public": "1" } }
```

#### RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{"result": "Wrong or missing >>groupname<< parameter"}
```

```
{"result": "Wrong or missing >>group_id<< parameter"}
```

Response (when group\_id is wrong): {"result": "Group with the given id does not exists"}

#### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong or missing >>groupname<< parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong or missing >>group_id<< parameter", "status": "error"}}
```

Response (when group\_id is wrong):

```
{"result": {"error_text": "Group with the given id does not exists", "status": "error"}}
```

## 29. Phonebook group delete: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/group\\_delete](https://url-of-smseagle/http_api/group_delete)

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication) |

|              |  |
|--------------|--|
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group   |
| groupname    | name of existing group   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

```
https://url-of-smseagle/http_api/group_delete?
access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&group_id=2&groupname=myusers
```

#### RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>groupname<< parameter**

**Wrong or missing >>group\_id<< parameter**

Response (when group\_id is wrong): **Group with the given id and name does not exist**

#### RESPONSE (XML):

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>groupname<< parameter</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Wrong or missing >>group_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when group\_id is wrong):

```

<xml>
  <error_text>Group with the given id does not exists</error_text>
  <status>error</status>
</xml>

```

## 30. Phonebook group delete: JSONRPC method

### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group   |
| groupname    | name of existing group   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

### EXAMPLES:

```

{ "method": "phonebook.group_delete",
  "params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "group_id": "2", "groupname": "myusers" } }

```

### RESPONSE:

```

Response: { "result": "OK" }

Response (when wrong logindata): { "result": "Invalid login or password" }

Response (when wrong access token): { "result": "Invalid access token" }

Response (when wrong parameters):
{ "result": "Wrong or missing >>groupname<< parameter" }
{ "result": "Wrong or missing >>group_id<< parameter" }

Response (when group_id is wrong): { "result": "Group with the given id and name does not exist" }

```

### RESPONSE (EXTENDED):

```

Response: { "result": { "status": "ok" } }

Response (when wrong logindata):
{ "result": { "error_text": "Invalid login or password", "status": "error" } }

Response (when wrong access token):
{ "result": { "error_text": "Invalid access token", "status": "error" } }

Response (when wrong parameters):
{ "result": { "error_text": "Wrong or missing >>groupname<< parameter", "status": "error" } }

```

```
{"result": {"error_text": "Wrong or missing >>group_id<< parameter", "status": "error"}}
```

**Response (when group\_id is wrong):**

```
{"result": {"error_text": "Group with the given id does not exists", "status": "error"}}
```

## 31. Phonebook group add contact: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/group\\_addcontact](https://url-of-smseagle/http_api/group_addcontact)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the group  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

[https://url-of-smseagle/http\\_api/group\\_addcontact?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&group\\_id=2&contact\\_id=1](https://url-of-smseagle/http_api/group_addcontact?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&group_id=2&contact_id=1)

**RESPONSE:**

**Response: OK**

**Response (when wrong logindata): Invalid login or password**

**Response (when wrong access token): Invalid access token**

**Response (when wrong parameters):**

**Wrong or missing >>group\_id<< parameter**

**Wrong or missing >>contact\_id<< parameter**

**Response (when id is wrong):**

**Group with the given id does not exists**

**Contact with the given id does not exists**

**RESPONSE (XML):**

**Response:**

```
<xml>
  <status>ok</status>
</xml>
```

**Response (when wrong logindata):**

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
```

```
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>group_id<< parameter</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when id is wrong):

```
<xml>
  <error_text>Group with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Contact with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

## 32. Phonebook group add contact: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the group  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

EXAMPLES:

```
{"method": "phonebook.group_addcontact",
"params": {"access_token": "0005gOjCOLMH8F2BPO8mWqcGzyCVHRLq", "group_id": "2", "contact_id": "1"}}
```

#### RESPONSE:

```
Response: {"result": "OK"}  
Response (when wrong logindata): {"result": "Invalid login or password"}  
Response (when wrong access token): {"result": "Invalid access token"}  
Response (when wrong parameters):  
{"result": "Wrong or missing >>group_id<< parameter"}  
{"result": "Wrong or missing >>contact_id<< parameter"}  
Response (when id is wrong):  
{"result": "Group with the given id does not exists"}  
{"result": "Contact with the given id does not exists"}
```

#### RESPONSE (EXTENDED):

```
Response: {"result": {"status": "ok"} }  
  
Response (when wrong logindata):  
{"result": {"error_text": "Invalid login or password", "status": "error"} }  
  
Response (when wrong access token):  
{"result": {"error_text": "Invalid access token", "status": "error"} }  
  
Response (when wrong parameters):  
{"result": {"error_text": "Wrong or missing >>group_id<< parameter", "status": "error"} }  
  
{"result": {"error_text": "Wrong or missing >>contact_id<< parameter", "status": "error"} }  
  
Response (when id is wrong):  
{"result": {"error_text": "Group with the given id does not exists", "status": "error"} }  
  
{"result": {"error_text": "Contact with the given id does not exists", "status": "error"} }
```

## 33. Phonebook group remove contact: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/group\\_removecontact](https://url-of-smseagle/http_api/group_removecontact)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be removed from the group  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

`https://url-of-smseagle/http_api/group_removecontact?  
access_token=0005gOjCOLMH8F2BPo8mWqcGzyCVHRLq&group_id=2&contact_id=1`

**RESPONSE:**

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>group\_id<< parameter**

**Wrong or missing >>contact\_id<< parameter**

Response (when id is wrong):

**Group with the given id does not exists**

**Contact with the given id does not exists**

**RESPONSE (XML):**

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>group_id<< parameter</error_text>
  <status>error</status>
</xml>
```

<xml>

```
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when id is wrong):

```
<xml>
  <error_text>Group with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

<xml>

```
  <error_text>Contact with the given id does not exists</error_text>
```

```

<status>error</status>
</xml>

```

## 34. Phonebook group remove contact: JSONRPC method

### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| group_id     | id of existing group (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be removed from the group  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

### EXAMPLES:

```
{
  "method": "phonebook.group_removecontact",
  "params": {
    "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq",
    "group_id": "2",
    "contact_id": "1"
  }
}
```

### RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{"result": "Wrong or missing >>group_id<< parameter"}
```

```
{"result": "Wrong or missing >>contact_id<< parameter"}
```

Response (when id is wrong):

```
{"result": "Group with the given id does not exists"}
```

```
{"result": "Contact with the given id does not exists"}
```

### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token) :

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong or missing >>group_id<< parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong or missing >>contact_id<< parameter", "status": "error"}}
```

**Response (when id is wrong):**

```
{"result": {"error_text": "Group with the given id does not exists", "status": "error"}}
```

```
{"result": {"error_text": "Contact with the given id does not exists", "status": "error"}}
```

## 35. Phonebook contact create: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/contact\\_create](https://url-of-smseagle/http_api/contact_create)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| contactname  | name for the created contact   |
| number       | telephone number for the created contact   |
| public       | (optional parameter) 0 = private contact, 1 = public contact (default value)                       |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**EXAMPLES:**

[https://url-of-smseagle/http\\_api/contact\\_create?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&contactname=johndoe&number=12345678&public=1](https://url-of-smseagle/http_api/contact_create?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&contactname=johndoe&number=12345678&public=1)

**RESPONSE:**

**Response: OK; ID=[ID of created contact]**

Sample response: OK; ID=2

**Response (when wrong logindata): Invalid login or password**

**Response (when wrong access token): Invalid access token**

**Response (when wrong parameters):**

**Wrong or missing >>contactname<< parameter**

**Wrong or missing >>number<< parameter**

**RESPONSE (XML):**

Response:

```
<xml>
  <contact_id>[ID of created contact]</contact_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
```

```

<contact_id>2</contact_id>
<status>ok</status>
</xml>

```

Response (when wrong logindata):

```

<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>

```

Response (when wrong access token):

```

<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
  <error_text>Wrong or missing >>contactname<< parameter</error_text>
  <status>error</status>
</xml>

```

```

<xml>
  <error_text>Wrong or missing >>number<< parameter</error_text>
  <status>error</status>
</xml>

```

## 36. Phonebook contact create: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| contactname  | name for the created contact   |
| number       | telephone number for the created contact   |
| public       | (optional parameter) 0 = private contact 1 = public contact (default value)  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

**EXAMPLES:**

```

{ "method": "phonebook.contact_create",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq", "contactname": "johndoe", "number": "12345678", "public": "1" } }

```

**RESPONSE:**

**Response:** { "result": "OK; ID=[ID of created contact]" }

Sample response: {"result": "OK; ID=2"}  
 Response (when wrong logindata): {"result": "Invalid login or password"}  
 Response (when wrong access token): {"result": "Invalid access token"}  
 Response (when wrong parameters):  
 {"result": "Wrong or missing >>contactname<< parameter"}  
 {"result": "Wrong or missing >>number<< parameter"}

#### RESPONSE (EXTENDED):

Response:  
 {"result": {"contact\_id": "[ID of created contact]", "status": "ok"} }  
  
 Sample response: {"result": {"contact\_id": "2", "status": "ok"} }  
  
 Response (when wrong logindata):  
 {"result": {"error\_text": "Invalid login or password", "status": "error"} }  
  
 Response (when wrong access token):  
 {"result": {"error\_text": "Invalid access token", "status": "error"} }  
  
 Response (when wrong parameters):  
 {"result": {"error\_text": "Wrong or missing >>contactname<< parameter", "status": "error"} }  
  
 {"result": {"error\_text": "Wrong or missing >>number<< parameter", "status": "error"} }

## 37. Phonebook contact read: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/contact\\_read](https://url-of-smseagle/http_api/contact_read)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| public       | (optional parameter) 0 = private contacts (default value), 1 = public contacts                     |
| uid          | (optional parameter) id of user who created the contact  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/contact\\_read?  
 access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&public=1&uid=12](https://url-of-smseagle/http_api/contact_read?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&public=1&uid=12)

#### RESPONSE:

Sample response: [link](#)

Response (when no data): **No data to display**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>uid<< parameter**

**Wrong or missing >>public<< parameter**

#### RESPONSE (XML):

Sample response:

```
<xml>
<contacts>
<item>
<ID>2</ID>
<GroupID>-1</GroupID>
<Name>John Doe</Name>
<Number>123123123</Number>
<id_user>1</id_user>
<is_public>true</is_public>
</item>
<item>
<ID>4</ID>
<GroupID>-1</GroupID>
<Name>Jan Nowak</Name>
<Number>4215456456</Number>
<id_user>1</id_user>
<is_public>true</is_public>
</item>
<item>
<ID>5</ID>
<GroupID>-1</GroupID>
<Name>Andy</Name>
<Number>+441234155931</Number>
<id_user>1</id_user>
<is_public>true</is_public>
</item>
</contacts>
<status>ok</status>
</xml>
```

Response (when no data):

```
<xml>
<error_text>No data to display</error_text>
<status>error</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
<error_text>Invalid login or password</error_text>
<status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
```

```

<error_text>Invalid Access token</error_text>
<status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
  <error_text>Wrong or missing >>uid<< parameter</error_text>
  <status>error</status>
</xml>

```

```

<xml>
  <error_text>Wrong or missing >>public<< parameter</error_text>
  <status>error</status>
</xml>

```

## 38. Phonebook contact read: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| public       | (optional parameter) 0 = private contacts (default value), 1 = public contacts   |
| uid          | (optional parameter) id of user who created the contact  |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

EXAMPLES:

```

{ "method": "phonebook.contact_read",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzyCVHRLq", "public": "1",
"uid": "12" } }

```

RESPONSE:

Sample response:

```

{ "result": [
  { "ID": "2", "GroupID": "-1", "Name": "John
Doe", "Number": "123123123", "id_user": "1", "is_public": "false" },
  { "ID": "4", "GroupID": "-1", "Name": "Jan
Nowak", "Number": "4215456456", "id_user": "1", "is_public": "false" },
  { "ID": "5", "GroupID": "-
1", "Name": "Andy", "Number": "+441234155931", "id_user": "1", "is_public": "fa
lse" }
] }

```

Response (when no data): {"result": "No data to display"}

**Response (when wrong logindata):** {"result": "Invalid login or password"}

**Response (when wrong access token):** {"result": "Invalid access token"}

**Response (when wrong parameters):**

```
{"result": "Wrong or missing >>uid<< parameter"}  
{"result": "Wrong or missing >>public<< parameter"}
```

#### RESPONSE (EXTENDED):

Sample response:

```
{"result": {"contacts": [  
    {"ID": "2", "GroupID": "-1", "Name": "John  
Doe", "Number": "123123123", "id_user": "1", "is_public": "false"},  
    {"ID": "4", "GroupID": "-1", "Name": "Jan  
Nowak", "Number": "4215456456", "id_user": "1", "is_public": "false"},  
    {"ID": "5", "GroupID": "-  
1", "Name": "Andy", "Number": "+441234155931", "id_user": "1", "is_public": "fa  
lse"}  

```

**Response (when no data):**

```
{"result": {"error_text": "No data to display", "status": "error"}}
```

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>uid<<  
parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong or missing >>public<<  
parameter", "status": "error"}}
```

## 39. Phonebook contact update: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/contact\\_update](https://url-of-smseagle/http_api/contact_update)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)    |
| login        | your user to login to SMSEagle (see details in point API Authentication) |

|              |  |
|--------------|--|
| pass         | your password to login to SMSEagle   |
| contact_id   | id of existing contact   |
| contactname  | name for the contact   |
| number       | phone number for the contact   |
| public       | (optional parameter) 0 = private group, 1 = public group   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/contact\\_update?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contact\\_id=4&contactname=johnlord&number=123456789&public=1](https://url-of-smseagle/http_api/contact_update?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contact_id=4&contactname=johnlord&number=123456789&public=1)

#### RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>contactname<< parameter**

**Wrong or missing >>contact\_id<< parameter**

**Wrong or missing >>number<< parameter**

Response (when contact\_id is wrong): **Contact with the given id does not exists**

#### RESPONSE (XML):

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>contactname<< parameter</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>
```

```

<status>error</status>
</xml>

<xml>
<error_text>Wrong or missing >>number<< parameter</error_text>
<status>error</status>
</xml>

```

Response (when contact\_id is wrong):

```

<xml>
<error_text>Contact with the given id does not exists</error_text>
<status>error</status>
</xml>

```

## 40. Phonebook contact update: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)  |
| login        | your user to login to SMSEagle (see details in point API Authentication)   |
| pass         | your password to login to SMSEagle   |
| contact_id   | id of existing contact   |
| contactname  | name for the contact   |
| number       | phone number for the contact   |
| public       | (optional parameter) 0 = private group, 1 = public group   |
| responsetype | (optional parameter) simple = format response as simple object with one result field (default), extended = format response as extended JSON object |

**EXAMPLES:**

```
{
  "method": "phonebook.contact_update",
  "params": {
    "access_token": "0005g0jCOLMH8F2BPo8mWqcGzycVHRLq",
    "contact_id": "4",
    "contactname": "johnlord",
    "number": "123456789",
    "public": "1"
  }
}
```

**RESPONSE:**

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```

{"result": "Wrong or missing >>contactname<< parameter"}
{"result": "Wrong or missing >>contact_id<< parameter"}
{"result": "Wrong or missing >>number<< parameter"}

```

Response (when contact\_id is wrong): {"result": "Contact with the given id does not exists"}

#### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

#### Response (when wrong logindata):

{"result": {"error\_text": "Invalid login or password", "status": "error"}}

#### Response (when wrong access token):

{"result": {"error\_text": "Invalid access token", "status": "error"}}

#### Response (when wrong parameters):

{"result": {"error\_text": "Wrong or missing >>contactname<< parameter", "status": "error"}}

{"result": {"error\_text": "Wrong or missing >>contact\_id<< parameter", "status": "error"}}

{"result": {"error\_text": "Wrong or missing >>number<< parameter", "status": "error"}}

#### Response (when contact\_id is wrong):

{"result": {"error\_text": "Contact with the given id does not exists", "status": "error"}}

## 41. Phonebook contact delete: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/contact\\_delete](https://url-of-smseagle/http_api/contact_delete)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| contact_id   | id of existing contact   |
| contactname  | name of existing contact   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/contact\\_delete?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contact\\_id=4&contactname=johnlord](https://url-of-smseagle/http_api/contact_delete?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&contact_id=4&contactname=johnlord)

#### RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>contactname<< parameter**

#### **Wrong or missing >>contact\_id<< parameter**

Response (when contact\_id is wrong): **Contact with the given id and name does not exists**

#### [RESPONSE \(XML\):](#)

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>contactname<< parameter</error_text>
  <status>error</status>
</xml>

<xml>
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when contact\_id is wrong):

```
<xml>
  <error_text>Contact with the given id and name does not exists </error_text>
  <status>error</status>
</xml>
```

## [42. Phonebook contact delete: JSONRPC method](#)

#### [HTTP POST METHOD:](#)

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)    |
| login        | your user to login to SMSEagle (see details in point API Authentication) |
| pass         | your password to login to SMSEagle                                       |
| contact_id   | id of existing contact   |
| contactname  | name of existing contact   |

|                     |   |
|---------------------|---|
| <b>responsetype</b> | <i>(optional parameter)</i> simple = format response as simple object with one result field (default), extended = format response as extended JSON object |
|---------------------|---|

#### EXAMPLES:

```
{ "method": "phonebook.contact_delete",
"params": { "access_token": "0005g0jC01MH8F2BPo8mWqcGzycVHRLq", "contact_id": "4", "contactname": "johnlord" } }
```

#### RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{ "result": "Wrong or missing >>contactname<< parameter" }
```

```
{ "result": "Wrong or missing >>contact_id<< parameter" }
```

Response (when contact\_id is wrong): {"result": "Contact with the given id and name does not exists"}

#### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

```
{ "result": { "error_text": "Invalid login or password", "status": "error" } }
```

Response (when wrong access token):

```
{ "result": { "error_text": "Invalid access token", "status": "error" } }
```

Response (when wrong parameters):

```
{ "result": { "error_text": "Wrong or missing >>contactname<< parameter", "status": "error" } }
```

```
{ "result": { "error_text": "Wrong or missing >>contact_id<< parameter", "status": "error" } }
```

Response (when contact\_id is wrong):

```
{ "result": { "error_text": "Contact with the given id and name does not exists", "status": "error" } }
```

## 45. Phonebook shift create: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/shift\\_create](https://url-of-smseagle/http_api/shift_create)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)    |
| login        | your user to login to SMSEagle (see details in point API Authentication) |
| pass         | your password to login to SMSEagle                                       |
| name         | name for the created shift   |

|                |   |
|----------------|---|
| enabled        | 0 = disabled, 1 = enabled   |
| (mon-sun)_from | <i>shift start hour for each day of week</i>  |
| (mon-sun)_to   | <i>shift end hour for each day of week</i>  |
| responsetype   | <i>(optional parameter)</i> text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

`https://url-of-smseagle/http_api/shift_create?  
access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&name=myshift&mon_from=08:00&mon_to=16:00&wed_from=09:00&wed_to=20:00&enabled=1`

#### RESPONSE:

Response: **OK; ID=[ID of created shift]**

Sample response: OK; ID=5

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters): **Wrong or missing >>name<< parameter**

#### RESPONSE (XML):

Response:

```
<xml>
  <shift_id>[ID of created shift]</shift_id>
  <status>ok</status>
</xml>
```

Sample response:

```
<xml>
  <shift_id>5</shift_id>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>name<< parameter</error_text>
  <status>error</status>
</xml>
```

## 46. Phonebook shift create: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter      | Description   |
|----------------|---|
| access_token   | authentication access token (see details in point API Authentication)                                     |
| login          | your user to login to SMSEagle (see details in point API Authentication)                                  |
| pass           | your password to login to SMSEagle  |
| name           | name for the created shift  |
| enabled        | 0 = disabled, 1 = enabled   |
| (mon-sun)_from | <i>shift start hour for each day of week</i>  |
| (mon-sun)_to   | <i>shift end hour for each day of week</i>  |
| responsetype   | <i>(optional parameter)</i> text = format response as text (default), xml = format response as XML object |

EXAMPLES:

```
{ "method": "phonebook.shift_create",
  "params": { "access_token": "0005g0jC0lMH8F2BPo8mWqcGzycVHRLq", "name": "my shift", "mon_from": "08:00", "mon_to": "16:00", "wed_from": "09:00", "wed_to": "20:00", "enabled": "1" } }
```

RESPONSE:

Response: {"result": "OK; ID=[ID of created shift]"}

Sample response: {"result": "OK; ID=5"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters): {"result": "Wrong or missing >>name<< parameter"}

RESPONSE (EXTENDED):

Response:

```
{"result": {"shift_id": "[ID of created shift]", "status": "ok"}}
```

Sample response: {"result": {"shift\_id": "748", "status": "ok"} }

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong or missing >>name<< parameter", "status": "error"}}
```

## 47. Phonebook shift read: HTTP GET method

HTTP GET METHOD:

`https://url-of-smseagle/http_api/shift_read`

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| name         | (optional parameter) shift name  |
| enabled      | (optional parameter) 0 = disabled, 1 = enabled   |
| shift_id     | (optional parameter) shift id  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

EXAMPLES:

`https://url-of-smseagle/http_api/shift_read?`  
`access_token=0005gOjC0lMH8F2BPo8mWqcGzycVHRLq&name=myshift`

RESPONSE:

Sample response: [link](#)

Response (when no data): **No data to display**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong >>shift\_id<< parameter**

RESPONSE (XML):

Sample response:

```
<xml>
<shifts>
<shift>
<id_shift>62</id_shift>
<name>myshift</name>
<mon_from>08:00</mon_from>
<mon_to>16:00</mon_to>
<tue_from/>
<tue_to/>
<wed_from>09:00</wed_from>
<wed_to>20:00</wed_to>
<thu_from/>
<thu_to/>
<fri_from/>
<fri_to/>
<sat_from/>
<sat_to/>
<sun_from/>
```

```

<sun_to/>
<enabled>true</enabled>
</shift>
</shifts>
<status>ok</status>
</xml>
Response (when no data):
<xml>
  <error_text>No data to display</error_text>
  <status>error</status>
</xml>

```

Response (when wrong logindata):

```

<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>

```

Response (when wrong access token):

```

<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
  <error_text> Wrong >>id<< parameter</error_text>
  <status>error</status>
</xml>

```

Response (when wrong parameters):

```

<xml>
  <error_text> Wrong >>enabled<< parameter</error_text>
  <status>error</status>
</xml>

```

## 48. Phonebook shift read: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)                                       |
| login        | your user to login to SMSEagle (see details in point API Authentication)                                    |
| pass         | your password to login to SMSEagle  |
| name         | ( <i>optional parameter</i> ) shift name  |
| enabled      | ( <i>optional parameter</i> ) 0 = disabled, 1 = enabled   |
| shift_id     | ( <i>optional parameter</i> ) shift id  |
| responsetype | ( <i>optional parameter</i> ) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

```
{"method": "phonebook.shift_read",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "name": "myshift"}}
```

#### RESPONSE:

Sample response:

```
{
  "result": [
    {
      "id_shift": "62",
      "name": "myshift",
      "mon_from": "08:00",
      "mon_to": "16:00",
      "tue_from": null,
      "tue_to": null,
      "wed_from": "09:00",
      "wed_to": "20:00",
      "thu_from": null,
      "thu_to": null,
      "fri_from": null,
      "fri_to": null,
      "sat_from": null,
      "sat_to": null,
      "sun_from": null,
      "sun_to": null,
      "enabled": "true"
    }
  ]
}

Response (when no data): {"result": "No data to display"}
Response (when wrong logindata): {"result": "Invalid login or password"}
Response (when wrong access token): {"result": "Invalid access token"}
Response (when wrong parameters):
{"result": "Wrong >>enabled<< parameter"}
{"result": "Wrong >>shift_id<< parameter"}
```

#### RESPONSE (EXTENDED):

Sample response:

```
{
  "result": {
    "shifts": [
      {
        "id_shift": "62",
        "name": "myshift",
        "mon_from": "08:00",
        "mon_to": "16:00",
        "tue_from": null,
        "tue_to": null,
```

```

        "wed_from": "09:00",
        "wed_to": "20:00",
        "thu_from": null,
        "thu_to": null,
        "fri_from": null,
        "fri_to": null,
        "sat_from": null,
        "sat_to": null,
        "sun_from": null,
        "sun_to": null,
        "enabled": "false"
    }
],
"status": "ok"
}
}

```

**Response (when no data):**

```
{"result": {"error_text": "No data to display", "status": "error"}}
```

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

**Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong >> enabled<< parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong >> shift_id<< parameter", "status": "error"}}
```

## 49. Phonebook shift update: HTTP GET method

**HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/shift\\_update](https://url-of-smseagle/http_api/shift_update)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift   |
| name         | name for the shift   |
| enabled      | 0 = disabled, 1 = enabled  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

## EXAMPLES:

```
https://url-of-smseagle/http_api/shift_update?  
access_token=0005gOjCOLMH8F2BPo8mWqcGzyCVHRLq&shift_id=24&name=updatedshift&enabled=1
```

## RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>name<< parameter**

**Wrong or missing >>shift\_id<< parameter**

Response (when shift\_id is wrong): **Shift with the given id does not exists**

## RESPONSE (XML):

Response:

```
<xml>  
  <status>ok</status>  
</xml>
```

Response (when wrong logindata):

```
<xml>  
  <error_text>Invalid login or password</error_text>  
  <status>error</status>  
</xml>
```

Response (when wrong access token):

```
<xml>  
  <error_text>Invalid Access token</error_text>  
  <status>error</status>  
</xml>
```

Response (when wrong parameters):

```
<xml>  
  <error_text>Wrong or missing >>name<< parameter</error_text>  
  <status>error</status>  
</xml>
```

```
<xml>  
  <error_text>Wrong or missing >>shift_id<< parameter</error_text>  
  <status>error</status>  
</xml>
```

Response (when shift\_id is wrong):

```
<xml>  
  <error_text>Shift with given id does not exists</error_text>  
  <status>error</status>  
</xml>
```

## 50. Phonebook shift update: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift   |
| name         | name for the shift   |
| enabled      | 0 = disabled, 1 = enabled  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

EXAMPLES:

```
{"method": "phonebook.shift_update",
"params": {"access_token": "0005gOjC0lMH8F2BPo8mWqcGzycVHRLq", "shift_id": "24", "name": "updatedshift", "enabled": "1"}}
```

RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{"result": "Wrong or missing >>name<< parameter"}
```

```
{"result": "Wrong or missing >>shift_id<< parameter"}
```

Response (when shift\_id is wrong): {"result": "Shift with the given id does not exists"}

RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong or missing >>name<< parameter", "status": "error"}}
```

```
{"result": {"error_text": "Wrong or missing >>shift_id<< parameter", "status": "error"}}
```

Response (when shift\_id is wrong):

```
{"result": {"error_text": "Shift with the given id does not exists", "status": "error"}}
```

## 51. Phonebook shift delete: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/shift\\_delete](https://url-of-smseagle/http_api/shift_delete)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

[https://url-of-smseagle/http\\_api/shift\\_delete?  
access\\_token=0005g0jC01MH8F2BPO8mWqcGzycVHRLq&shift\\_id=24](https://url-of-smseagle/http_api/shift_delete?access_token=0005g0jC01MH8F2BPO8mWqcGzycVHRLq&shift_id=24)

### RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>shift\_id<< parameter**

Response (when shift\_id is wrong): **Shift with the given id does not exist**

### RESPONSE (XML):

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>shift_id<< parameter</error_text>
</xml>
```

```
<status>error</status>
</xml>
```

Response (when shift\_id is wrong):

```
<xml>
  <error_text>Shift with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

## 52. Phonebook shift delete: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

EXAMPLES:

```
{"method": "phonebook.shift_delete",
"params": {"access_token": "0005gOjCOLMH8F2BPO8mWqcGzyCVHRLq", "shift_id": "24"}}
```

RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

```
{"result": "Wrong or missing >>shift_id<< parameter"}
```

Response (when shift\_id is wrong): {"result": "Shift with the given id does not exist"}

RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong parameters):

```
{"result": {"error_text": "Wrong or missing >>shift_id<< parameter", "status": "error"}}
```

Response (when shift\_id is wrong):

```
{"result": {"error_text": "Shift with the given id does not exists", "status": "error"}}
```

## 53. Phonebook shift add contact: HTTP GET method

HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/shift\\_addcontact](https://url-of-smseagle/http_api/shift_addcontact)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the shift  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

EXAMPLES:

[https://url-of-smseagle/http\\_api/shift\\_addcontact?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&shift\\_id=2&contact\\_id=1](https://url-of-smseagle/http_api/shift_addcontact?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&shift_id=2&contact_id=1)

RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>shift\_id<< parameter**

**Wrong or missing >>contact\_id<< parameter**

Response (when id is wrong):

**Shift with the given id does not exists**

**Contact with the given id does not exists**

RESPONSE (XML):

Response:

```
<xml>
  <status>ok</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when wrong parameters):

```
<xml>
  <error_text>Wrong or missing >>shift_id<< parameter</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>
  <status>error</status>
</xml>
```

Response (when id is wrong):

```
<xml>
  <error_text>Shift with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

```
<xml>
  <error_text>Contact with the given id does not exists</error_text>
  <status>error</status>
</xml>
```

## 54. Phonebook shift add contact: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the shift  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

EXAMPLES:

```
{ "method": "phonebook.shift_addcontact",
  "params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq", "shift_id": "24", "contact_id": "1" } }
```

RESPONSE:

Response: { "result": "OK" }

```

Response (when wrong logindata): {"result": "Invalid login or password"}
Response (when wrong access token): {"result": "Invalid access token"}
Response (when wrong parameters):
{"result": "Wrong or missing >>shift_id<< parameter"}
{"result": "Wrong or missing >>contact_id<< parameter"}
Response (when id is wrong):
{"result": "Shift with the given id does not exists"}
{"result": "Contact with the given id does not exists"}

```

#### **RESPONSE (EXTENDED):**

```
Response: {"result": {"status": "ok"} }
```

#### **Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"} }
```

#### **Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"} }
```

#### **Response (when wrong parameters):**

```
{"result": {"error_text": "Wrong or missing >>shift_id<< parameter", "status": "error"} }
```

```
{"result": {"error_text": "Wrong or missing >>contact_id<< parameter", "status": "error"} }
```

#### **Response (when id is wrong):**

```
{"result": {"error_text": "Shift with the given id does not exists", "status": "error"} }
```

```
{"result": {"error_text": "Contact with the given id does not exists", "status": "error"} }
```

## 55. Phonebook shift remove contact: HTTP GET method

#### **HTTP GET METHOD:**

[https://url-of-smseagle/http\\_api/shift\\_removecontact](https://url-of-smseagle/http_api/shift_removecontact)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the shift  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

## EXAMPLES:

```
https://url-of-smseagle/http_api/shift_removecontact?  
access_token=0005gOjCOLMH8F2BPo8mWqcGzyCVHRLq&shift_id=24&contact_id=1
```

## RESPONSE:

Response: **OK**

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when wrong parameters):

**Wrong or missing >>shift\_id<< parameter**

**Wrong or missing >>contact\_id<< parameter**

Response (when id is wrong):

**Shift with the given id does not exists**

**Contact with the given id does not exists**

## RESPONSE (XML):

Response:

```
<xml>  
  <status>ok</status>  
</xml>
```

Response (when wrong logindata):

```
<xml>  
  <error_text>Invalid login or password</error_text>  
  <status>error</status>  
</xml>
```

Response (when wrong access token):

```
<xml>  
  <error_text>Invalid Access token</error_text>  
  <status>error</status>  
</xml>
```

Response (when wrong parameters):

```
<xml>  
  <error_text>Wrong or missing >>shift_id<< parameter</error_text>  
  <status>error</status>  
</xml>
```

<xml>

```
  <error_text>Wrong or missing >>contact_id<< parameter</error_text>  
  <status>error</status>  
</xml>
```

Response (when id is wrong):

```
<xml>  
  <error_text>Shift with the given id does not exists</error_text>  
  <status>error</status>  
</xml>
```

<xml>

```

<error_text>Contact with the given id does not exists</error_text>
<status>error</status>
</xml>

```

## 56. Phonebook shift remove contact: JSONRPC method

### HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| shift_id     | id of existing shift (or id's separated with comma)  |
| contact_id   | id of contact. The contact will be added to the shift  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

```

{
  "method": "phonebook.shift_removecontact",
  "params": {
    "access_token": "0005gOjCOLMH8F2BPo8mWqcGzycVHRLq",
    "shift_id": "24",
    "contact_id": "1"
  }
}

```

### RESPONSE:

Response: {"result": "OK"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when wrong parameters):

{"result": "Wrong or missing >>shift\_id<< parameter"}

{"result": "Wrong or missing >>contact\_id<< parameter"}

Response (when id is wrong):

{"result": "Shift with the given id does not exists"}

{"result": "Contact with the given id does not exists"}

### RESPONSE (EXTENDED):

Response: {"result": {"status": "ok"}}

Response (when wrong logindata):

{"result": {"error\_text": "Invalid login or password", "status": "error"}}

Response (when wrong access token):

{"result": {"error\_text": "Invalid access token", "status": "error"}}

Response (when wrong parameters):

{"result": {"error\_text": "Wrong or missing >>shift\_id<< parameter", "status": "error"}}

{"result": {"error\_text": "Wrong or missing >>contact\_id<< parameter", "status": "error"}}

**Response (when id is wrong):**

```
{"result": {"error_text": "Shift with the given id does not exists", "status": "error"}}

{"result": {"error_text": "Contact with the given id does not exists", "status": "error"}}
```

## 57. Get modem state: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/get\\_modem\\_state](https://url-of-smseagle/http_api/get_modem_state)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| modem_no     | (optional parameter) modem number to be queried (default = 1). Used only in multimodem devices     |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

[https://url-of-smseagle/http\\_api/get\\_modem\\_state?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&modem\\_no=1](https://url-of-smseagle/http_api/get_modem_state?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&modem_no=1)

### RESPONSE:

Response: **enabled / disabled**

Sample response: enabled

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when modem doesn't exist): **Wrong modem number**

### RESPONSE (XML):

Response:

```
<xml>
<modem_status>
  enabled / disabled
</modem_status>
<status>
  ok
</status>
</xml>
```

Sample response:

```
<xml>
<modem_status>
  enabled
</modem_status>
<status>
</status>
```

```
ok
</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when modem doesn't exist):

```
<xml>
  <error_text> Wrong modem number</error_text>
  <status>error</status>
</xml>
```

## 58. Get modem state: JSONRPC method

HTTP POST METHOD:

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| modem_no     | (optional parameter) modem number to be queried (default = 1). Used only in multimodem devices     |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

BODY:

```
{"method": "sms.get_modem_state",
"params": {"access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq"}}
```

RESPONSE:

```
{"result": enabled / disabled}
```

Sample response: {"result": "enabled"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}

Response (when modem doesn't exist): {"result": "Wrong modem number"}

RESPONSE (EXTENDED):

**Response:**

```
{"result": {"modem_status": "enabled / disabled", "status": "ok"}}
```

**Sample response:** {"result": {"modem\_status": "Wrong modem number", "status": "ok"}}

**Response (when wrong logindata):**

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

**Response (when wrong access token):**

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

**Response (when modem doesn't exist):**

```
{"result": {"error_text": "Wrong modem number", "status": "error"}}
```

## 59. Set modem state: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/set\\_modem\\_state](https://url-of-smseagle/http_api/set_modem_state)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| modem_no     | (optional parameter) modem number for status change (default = 1). Used only in multimodem devices |
| status       | <i>enabled / disabled</i>  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

[https://url-of-smseagle/http\\_api/set\\_modem\\_state?  
access\\_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&modem\\_no=1&status=enabled](https://url-of-smseagle/http_api/set_modem_state?access_token=0005g0jC0lMH8F2BPo8mWqcGzycVHRLq&modem_no=1&status=enabled)

### RESPONSE:

#### Response: OK

Response (when wrong logindata): **Invalid login or password**

Response (when wrong access token): **Invalid access token**

Response (when modem doesn't exist): **Wrong modem number**

Response (when wrong modem state): **Wrong modem state**

### RESPONSE (XML):

#### Response:

```
<xml>
<status>
  ok
</status>
</xml>
```

Response (when wrong logindata):

```
<xml>
  <error_text>Invalid login or password</error_text>
  <status>error</status>
</xml>
```

Response (when wrong access token):

```
<xml>
  <error_text>Invalid Access token</error_text>
  <status>error</status>
</xml>
```

Response (when modem doesn't exist):

```
<xml>
  <error_text>Wrong modem number</error_text>
  <status>error</status>
</xml>
```

Response (when wrong modem state):

```
<xml>
  <error_text>Wrong modem state</error_text>
  <status>error</status>
</xml>
```

## 60. Set modem state: JSONRPC method

[HTTP POST METHOD:](#)

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description   |
|--------------|---|
| access_token | authentication access token (see details in point API Authentication)                                       |
| login        | your user to login to SMSEagle (see details in point API Authentication)                                    |
| pass         | your password to login to SMSEagle  |
| modem_no     | ( <i>optional parameter</i> ) modem number for status change (default = 1). Used only in multimodem devices |
| status       | <i>enabled / disabled</i>   |
| responsetype | ( <i>optional parameter</i> ) text = format response as text (default), xml = format response as XML object |

[BODY:](#)

```
{ "method": "sms.set_modem_state",
"params": { "access_token": "0005g0jCOLMH8F2BPO8mWqcGzycVHRLq",
"status": "enabled" } }
```

[RESPONSE:](#)

```
{"result": enabled / disabled }
```

Sample response: {"result": "enabled"}

Response (when wrong logindata): {"result": "Invalid login or password"}

Response (when wrong access token): {"result": "Invalid access token"}  
Response (when modem doesn't exist): {"result": "Wrong modem number"}  
Response (when wrong modem state): {"result": "Wrong modem state"}

#### RESPONSE (EXTENDED):

Response:

```
{"result": {"modem_status": enabled / disabled, "status": "ok"}}
```

Sample response: {"result": {"modem\_status": "Wrong modem number", "status": "ok"}}

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when modem doesn't exist):

```
{"result": {"error_text": "Wrong modem number", "status": "error"}}
```

Response (when wrong modem state):

```
{"result": {"error_text": "Wrong modem state", "status": "error"}}
```

## 61. User ID read: HTTP GET method

#### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/userid\\_read](https://url-of-smseagle/http_api/userid_read)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| username     | <i>username to be queried</i>  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

#### EXAMPLES:

[https://url-of-smseagle/http\\_api/userid\\_read?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&username=myuser](https://url-of-smseagle/http_api/userid_read?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&username=myuser)

#### RESPONSE:

Response: **User ID**

Sample response: 24

Response (when username parameter is missing): **Missing >>username<< parameter**

Response (when user doesn't exist): **Wrong >>username<< parameter**

#### RESPONSE (XML):

Response:

```
<xml>
<status>
  ok
</status>
</xml>
```

Response (when username parameter is missing):

```
<xml>
<error_text>Missing >>username<< parameter</error_text>
<status>error</status>
</xml>
```

Response (when user doesn't exist):

```
<xml>
<error_text>Wrong >>username<< parameter</error_text>
<status>error</status>
</xml>
```

## 62. User ID read: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| username     | <i>username to be queried</i>  |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**BODY:**

```
{"method": "phonebook.userid_read",
"params": {"access_token": "0005gOjC0lMH8F2BPo8mWqcGzycVHRLq", "username": "myuser"}}
```

**RESPONSE:**

```
{"result": [user ID] }
Sample response: {"result": "24"}
Response (when username parameter is missing): {"result": "Missing >>username<< parameter"}
Response (when user doesn't exist): {"result": "Wrong >>username<< parameter"}
```

**RESPONSE (EXTENDED):**

**Response:**

```
{"result": {"uid": [user ID], "status": "ok"}}
```

**Sample response:** {"result": {"uid": "24", "status": "ok"}}

```

Response (when wrong logindata):
{"result": {"error_text": "Invalid login or password", "status": "error"}}

Response (when wrong access token):
{"result": {"error_text": "Invalid access token", "status": "error"}}

Response (when username parameter is missing):
{"result": {"error_text": "Missing >>username<< parameter", "status": "error"}}

Response (when user doesn't exist):
{"result": {"error_text": "Wrong >>username<< parameter", "status": "error"}}

```

## 63. Group members read: HTTP GET method

### HTTP GET METHOD:

[https://url-of-smseagle/http\\_api/group\\_members\\_read](https://url-of-smseagle/http_api/group_members_read)

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | ID of group to be queried  |
| user_id      | (optional parameter) show only contacts created by user with given ID                              |
| public       | (optional parameter) 0 = private, 1 = public   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

### EXAMPLES:

[https://url-of-smseagle/http\\_api/group\\_members\\_read?  
access\\_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&group\\_id=11](https://url-of-smseagle/http_api/group_members_read?access_token=0005g0jC01MH8F2BPo8mWqcGzycVHRLq&group_id=11)

### RESPONSE:

Sample response: [link](#)

Response (when wrong or missing group\_id parameter): **Wrong or missing >>group\_id<< parameter**

Response (when wrong user\_id parameter): **Wrong >>user\_id<< parameter**

Response (when wrong public parameter): **Wrong >>public<< parameter**

Response (when result set is empty): **No data to display**

### RESPONSE (XML):

Response:

```

<xml>
<contacts>
  <contact>
    <ID>17</ID>
    <Name>mycontact1</Name>
    <Number>23456</Number>
    <id_user>1</id_user>
    <is_public>true</is_public>
  </contact>
</contacts>

```

```

<contact>
<ID>24</ID>
<Name>mycontact3</Name>
<Number>12345</Number>
<id_user>3</id_user>
<is_public>false</is_public>
</contact>
</contacts>
</xml>

```

Response (when wrong or missing group\_id parameter):

```

<xml>
<error_text>Wrong or missing >>group_id<< parameter</error_text>
<status>error</status>
</xml>

```

Response (when wrong user\_id parameter):

```

<xml>
<error_text>Wrong >>user_id<< parameter</error_text>
<status>error</status>
</xml>

```

Response (when wrong public parameter):

```

<xml>
<error_text> Wrong >>public<< parameter </error_text>
<status>error</status>
</xml>

```

## 64. Group members read: JSONRPC method

**HTTP POST METHOD:**

<https://url-of-smseagle/jsonrpc/sms>

| Parameter    | Description  |
|--------------|--|
| access_token | authentication access token (see details in point API Authentication)                              |
| login        | your user to login to SMSEagle (see details in point API Authentication)                           |
| pass         | your password to login to SMSEagle   |
| group_id     | ID of group to be queried  |
| user_id      | (optional parameter) show only contacts created by user with given ID                              |
| public       | (optional parameter) 0 = private, 1 = public   |
| responsetype | (optional parameter) text = format response as text (default), xml = format response as XML object |

**BODY:**

```

{ "method": "phonebook.group_members_read",
"params": { "access_token": "0005gOjC0lMH8F2BPo8mWqcGzycVHRLq", "group_id": "11" } }

```

## RESPONSE:

Sample response:

```
{  
"result": [  
    {"ID": "1706", "Name": "mycontact1", "Number": "23456",  
     "id_user": "1", "is_public": "true"},  
    {"ID": "1693", "Name": "mycontact3", "Number": "12345",  
     "id_user": "3", "is_public": "false"}  
]  
}
```

Response (when wrong or missing group\_id parameter): {"result": "Wrong or missing >>group\_id<< parameter"}

Response (when wrong user\_id parameter): {"result": "Wrong >>user\_id<< parameter"}

Response (when wrong public parameter): {"result": "Wrong >>public<< parameter"}

## RESPONSE (EXTENDED):

Sample response:

```
{  
"result": {  
    "contacts": [  
        {"ID": "1706", "Name": "mycontact1", "Number": "23456",  
         "id_user": "1", "is_public": "true"},  
        {"ID": "1693", "Name": "mycontact3", "Number": "12345",  
         "id_user": "3", "is_public": "false"}  
    ],  
    "status": "ok"  
}
```

Response (when wrong logindata):

```
{"result": {"error_text": "Invalid login or password", "status": "error"}}
```

Response (when wrong access token):

```
{"result": {"error_text": "Invalid access token", "status": "error"}}
```

Response (when wrong or missing group\_id parameter):

```
{"result": {"error_text": "Wrong or missing >>group_id<< parameter", "status": "error"}}
```

Response (when wrong user\_id parameter):

```
{"result": "Wrong >>user_id<< parameter"}
```

Response (when wrong public parameter):

```
{"result": "Wrong >>public<< parameter"}
```

## Plugins and integration manuals for NMS & Auth systems

SMSEagle has a number of ready-to-use plugins and integration manuals for an easy and quick integration of SMSEagle device with external software (Network Monitoring Systems, Authentication Systems and other). The list grows constantly and is published on SMSEagle website. For a complete and up-to-date list of plugins please go to: <http://www.smseagle.eu/integration-plugins/>

## Connecting directly to SMSEagle database

SMSEagle's database operates on PostgreSQL database engine. It is possible to connect to the database from external application using the following credentials:

### POSTGRESQL DATABASE CREDENTIALS

**Host: IP address of your SMSEagle**

**Database name: smseagle**

**User: smseagleuser**

**Password: postgreeagle**

## Injecting short SMS using SQL

The simplest example is short text message (limited to 160 chars):

```
INSERT INTO outbox (
    DestinationNumber,
    TextDecoded,
    CreatorID,
    Coding,
    Class,
    SenderID
) VALUES (
    '1234567',
    'This is a SQL test message',
    'Program',
    'Default_No_Compression',
    -1,
    'smseagle1'
);

INSERT INTO user_outbox (
    id_outbox,
    id_user
) SELECT CURRVAL(pg_get_serial_sequence('outbox','ID')), 1;
```

In the above example the message will belong to user with **id\_user** 1 (default 'admin'). You can find **id\_user** values for other users in table public."user".

## Injecting long SMS using SQL

Inserting multipart messages is a bit more tricky, you need to construct also UDH header and store it hexadecimally written into UDH field. Unless you have a good reason to do this manually, use API.

For long text message, the UDH starts with 050003 followed by byte as a message reference (you can put any hex value there, but it should be different for each message, D3 in following example), byte for number of messages (02 in example, it should be unique for each message you send to same phone number) and byte for number of current message (01 for first message, 02 for second, etc.).

For example long text message of two parts could look like following:

```
INSERT INTO outbox (
    "DestinationNumber",
    "CreatorID",
    "MultiPart",
    "UDH",
    "TextDecoded",
    "Coding",
    "Class",
    "SenderID"
) VALUES (
    '1234567',
    'Program',
    'true',
    '050003D30201',
    'Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, qui',
    'Default_No_Compression',
    -1,
    'smseagle1'
)

INSERT INTO outbox_multipart (
    "ID",
    "SequencePosition",
    "UDH",
    "TextDecoded",
    "Coding",
    "Class"
) SELECT
    CURRVAL(pg_get_serial_sequence('outbox','ID')) + 1,
    2,
    '050003D30202',
    's nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.',
    'Default_No_Compression',
    -1;

INSERT INTO user_outbox (
    id_outbox,
```

```
    id_user
) SELECT
  CURRVAL(pg_get_serial_sequence('outbox','ID')) ,
  1;
```

*Note: Adding UDH means that you have less space for text, in above example you can use only 153 characters in single message.*

## Database cleaning scripts

We have added some useful scripts which may be used to delete SMS messages from database through Linux CLI.

Scripts are located at following directory:

/mnt/nand-user/scripts/

- **db\_delete** – script for deleting SMS from folders Inbox, SentItems older than provided date.  
Usage:  
./db\_delete YYYYMMDDhhmm
- **db\_delete\_7days** – script for deleting SMS from folders Inbox, SentItems older than 7 days.  
Usage:  
./db\_delete\_7days
- **db\_delete\_allfolders** – script for cleaning PostgreSQL database folders (Inbox, SentItems, Outbox). Specially designed to run periodically through *cron*. Usage:  
./db\_delete\_allfolders
- **db\_delete\_select** – script for deleting SMS from chosen database folder (Inbox, Outbox, SentItems, Trash). Usage:  
./db\_delete\_select {inbox|outbox|sentitems|trash}

### Adding script to system *cron* daemon

Due to security reasons *crontab* is being erased while rebooting the device. That's why *normal* cron entry won't work. Please see file */mnt/mtd/rcs* - this script is being launched due to startup of the device. Here you have some our cron rules added. You just need to add your rule at the end of the file.

Example:

*cron\_add db\_clean "0 0 1 \* \*/mnt/nand-user/scripts/db\_delete\_allfolders"*

which will run cleaning script every 1<sup>st</sup> day of month.

## SNMP agent

“Simple Network Management Protocol (SNMP) is an Internet-standard protocol for managing devices on IP networks. It is used mostly in network management systems to monitor network-attached devices for conditions that warrant administrative attention” (source: Wikipedia).

SMSeagle device has a built-in Net-SNMP agent. The SNMP agent provides access to Linux Host MIB tree of the device, and additionally (using extension NET-SNMP-EXTEND-MIB) allows access to custom metrics specific to SMSEagle.

Available SNMP metrics that describe a state of a SMSEagle device are:

| Metric name                      | Description   | OID  |
|----------------------------------|---|--|
| <b>GSM_Signal</b>                | Returns GSM signal strength in percent. Value range: 0-100. If modem is disconnected from GSM network GSM_Signal returns 0.   | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.10.71.83.77.95.83<br>.105.103.110.97.108   |
| <b>GSM_NetName1</b>              | Returns Network Name used on current SIMcard  | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.12.71.83.77.95.78<br>.101.116.78.97.109.101<br>.49   |
| <b>FolderOutbox_Total</b>        | Returns number of SMS messages in Outbox folder (outgoing queue length)   | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.17.70.111.108.10<br>0.101.114.73.110.98.11<br>1.120.95.84.111.116.97<br>.108                                 |
| <b>FolderInbox_Total</b>         | Returns number of SMS messages in Inbox folder  | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.17.70.111.108.10<br>0.101.114.73.110.98.11<br>1.120.95.84.111.116.97<br>.108                                 |
| <b>FolderSent_Last24H</b>        | Returns number of SMS messages sent from the device within last 24 hours  | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.18.70.111.108.10<br>0.101.114.83.101.110.1<br>16.95.76.97.115.116.50<br>.52.72                               |
| <b>FolderSent_Last1M</b>         | Returns number of SMS messages sent from the device within last month   | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.17.70.111.108.10<br>0.101.114.83.101.110.1<br>16.95.76.97.115.116.49<br>.77                                  |
| <b>FolderSent_Last24HSendErr</b> | Returns number of SMS messages sent with error within last 24h. Error occurs when GSM modem cannot send SMS message or message is rejected by GSM carrier (mostly happens when a credit on pre-paid SIM card is over) | .1.3.6.1.4.1.8072.1.3.2.<br>3.1.2.25.70.111.108.10<br>0.101.114.83.101.110.1<br>16.95.76.97.115.116.50<br>.52.72.83.101.110.100.<br>69.114.114 |

## RESULT VALUES

- Using OID

Result values for each custom metric are available and can be fetched from OID given in table above.

- Using textual name

Alternatively result values for each custom metric can be fetched using textual names from OID tree under: NET-SNMP-EXTEND-MIB::nsExtendOutputFull."**[METRIC NAME]**"

*For example:*

*Result value for parameter **GSM\_Signal**:*

*NET-SNMP-EXTEND-MIB::nsExtendOutputFull."**GSM\_Signal**"*

*If your chosen SNMP tool cannot access NET-SNMP-EXTEND-MIB objects, you can download MIB definitions from: <http://www.smseagle.eu/download/NET-SNMP-EXTEND-MIB.txt>*

## READING RESULT VALUES

In order to test-read the parameter values from SNMP agent you can use any tools available for SNMP protocol (for example: NET-SNMP library for Linux or iReasoning MiB-Browser for Windows).

### EXAMPLE OF READING **GSM\_SIGNAL** VALUE USING NET-SNMP LIBRARY

a) Command for reading the result value:

```
snmpget -v 2c -c public localhost  
.1.3.6.1.4.1.8072.1.3.2.3.1.2.10.71.83.77.95.83.105.103.110.97.108
```

Result:

```
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."GSM_Signal" = STRING: 54
```

*Comment: GSM Signal strength value is 54%*

### EXAMPLE OF READING **GSM\_NETNAME** VALUE USING NET-SNMP LIBRARY

a) Command for reading the result value:

```
snmpget -v 2c -c public localhost  
.1.3.6.1.4.1.8072.1.3.2.3.1.2.11.71.83.77.95.78.101.116.78.97.109.101
```

Result:

```
NET-SNMP-EXTEND-MIB::nsExtendOutput1Line."GSM_NetName" = STRING: Plus
```

*Comment: Currently used network is Plus*

### EXAMPLE OF READING **FOLDEROUTBOX\_TOTAL** VALUE USING NET-SNMP LIBRARY (AND TEXTUAL NAME OF METRIC)

a) Command for reading the result value:

```
snmpget -v 2c -c public ip-of-smseagle 'NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderOutbox_Total"'
```

Result:

```
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderOutbox_Total" = STRING: 0
```

*Comment: Number of SMS messages waiting in outbox queue is 0*

#### EXAMPLE OF READING SYSTEMUPTIME FROM LINUX HOST USING NET-SNMP LIBRARY

a) Command for reading the result value:

```
snmpget -v 2c -c public ip-of-smseagle system.sysUpTime.0
```

Result:

```
DISMAN-EVENT-MIB::sysUpTimeInstance = Timeticks: (216622) 0:36:06.22
```

*Comment: Linux system is up for 36 hours, 6.22 minutes*

#### EXAMPLE OF BROWSING SMSEAGLE EXTENSION PARAMETERS IN MIB TREE USING NET-SNMP LIBRARY

a) Command for reading the result value:

```
snmpwalk -v 2c -c public ip-of-smseagle .1.3.6.1.4.1.8072.1.3.2.3.1.2
```

Result:

```
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."GSM_Signal" = STRING: 54  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."GSM_NetName" = STRING: Plus  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderInbox_Total" = STRING: 15  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderSent_Last1M" = STRING: 19  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderOutbox_Total" = STRING: 0  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderSent_Last24H" = STRING: 0  
NET-SNMP-EXTEND-MIB::nsExtendOutputFull."FolderSent_Last24HSendErr" = STRING: 0
```

## EXAMPLE OF BROWSING SMSEAGLE EXTENSION PARAMETERS IN MIB TREE USING MIB-BROWSER

The screenshot shows the iReasoning MIB Browser interface. On the left, the MIB Tree is displayed with a hierarchical structure of SNMP MIBs, including iso.org.dod.internet, mgmt, private, enterprises, netSnmp, netSnmpObjects, nsExtensions, netSnmpExtendMIB, nsExtendObjects, nsExtendConfigTable, nsExtendOutput1Table, nsExtendOutput1Entry, nsExtendOutput1Line, nsExtendOutputFull, nsExtendOutNumLines, nsExtendResult, nsExtendOutput2Table, nsExtendGroups, nsDLMod, nsCache, nsErrorHistory, nsConfiguration, and nsTransactions. The 'nsExtendOutputFull' node under 'nsExtendOutput1Table' is selected. On the right, the Result Table displays a list of parameters with their names, OIDs, and values. The table has columns for Name/OID and signal. The data includes several entries for 'nsExtendArgs' and 'nsExtendOutputFull' with various OID values and signal values like inbox, sentim, outbox, sent24h, 54, 74, 504, 0, and 52.72.

| Name/OID   | signal  |
|--|---------|
| nsExtendArgs. 10.71.83.77.95.83.105.103.110.97.108                                       |         |
| nsExtendArgs. 17.70.111.108.100.101.114.73.110.98.111.120.95.84.111.116.97.108           | inbox   |
| nsExtendArgs. 17.70.111.108.100.101.114.83.101.110.116.95.76.97.115.116.49.77            | sentim  |
| nsExtendArgs. 18.70.111.108.100.101.114.79.117.116.98.111.120.95.84.111.116.97.108       | outbox  |
| nsExtendArgs. 18.70.111.108.100.101.114.83.101.110.116.95.76.97.115.116.50.52.72         | sent24h |
| nsExtendOutputFull. 10.71.83.77.95.83.105.103.110.97.108                                 | 54      |
| nsExtendOutputFull. 17.70.111.108.100.101.114.73.110.98.111.120.95.84.111.116.97.108     | 74      |
| nsExtendOutputFull. 17.70.111.108.100.101.114.83.101.110.116.95.76.97.115.116.49.77      | 504     |
| nsExtendOutputFull. 18.70.111.108.100.101.114.79.117.116.98.111.120.95.84.111.116.97.108 | 0       |
| nsExtendOutputFull. 18.70.111.108.100.101.114.83.101.110.116.95.76.97.115.116.50.52.72   | 0       |

Below the table, a detailed view of the 'nsExtendOutputFull' entry is shown in a separate window:

|          |                               |
|----------|-------------------------------|
| Name     | nsExtendOutputFull            |
| OID      | .1.3.6.1.4.1.8072.1.3.2.3.1.2 |
| MIB      | NET-SNMP-EXTEND-MIB           |
| Syntax   | DISPLAYSTRING                 |
| Access   | read-only                     |
| Status   | current                       |
| DefVal   |                               |
| Augments | nsExtendConfigEntry           |

## Setting up SNMP v3 access control

By default SMSEagle devices uses SNMP v2 access control. Using v3 can strengthen security, however is not obsolete. To ease switch to SNMP v3 access control we've prepared special shell script located at `/mnt/nand-user/smseagle` directory.

1. Log in via SSH using root account
2. Navigate to:  
`cd /mnt/nand-user/smseagle/`
3. Configuration script:  
`./snmpv3`
4. Script can run with following parameters:
  - i. add
  - ii. del
  - iii. enablev2
  - iv. disablev2
5. To add v3 USER please run:  
`./snmpv3 add USERNAME PASSWORD ENCRYPTIONPASSWORD`
6. To delete USER please run:  
`./snmpv3 del`
7. To disable v2 access policy run:  
`./snmpv3 disablev2`
8. To enable v2 access policy run:  
`./snmpv3 enablev2`

## Forwarding logs to external server

Our devices runs rsyslog for log managing. Here we describe how to configure additional rules for rsyslog daemon: rsyslogd. This is only a brief excerpt from rsyslog manual website. Full information is available at: <http://www.rsyslog.com/>

Rsyslogd configuration is managed using a configuration file located at `/etc/rsyslog.conf`

- Forwarding all logs to external server (using TCP port)

At the bottom of the configuration file add:

`*.* @@server_ip_address:port`

eg.

`*.* @@192.168.0.199:10514`

- Forwarding all logs to external server (using UDP port)

At the bottom of the configuration file add:

`*.* @server_ip_address:port`

eg.

`*.* @192.168.0.199:10514`

- SSL-encryption of your log traffic: please have a look at this article:

[http://www.rsyslog.com/doc/v8-stable/tutorials/tls\\_cert\\_summary.html](http://www.rsyslog.com/doc/v8-stable/tutorials/tls_cert_summary.html)

## Automatic software updates checks

SMSEagle software is under process of continual improvement. We listen to our customers, and new releases are based on our customer's inputs/requests. Software updates are released frequently, and offer access to new features and fixes to reported issues. Web-GUI offers you a possibility to automatically check for new software updates. This can be done in two ways:


### MANUAL CHECK

In order to manually check for available software updates go to menu Settings > tab Maintenance. Click on the button "Check manually now". At the top pops up a balloon in red with information if it is up-to-date.

### AUTOMATIC CHECK

In order to start automatic checks for software updates go to menu Settings > tab Maintenance, and check the option "Automatically check for software updates". This will enable periodic checks (once a month) for available software updates. If a new update is available, a message "Update Available" will appear in menu Settings> Sysinfo – next to the current software version number.

If you select "Notify Admin about new software version by SMS", the device will additionally send SMS to the default admin account (if the phone number is entered in the account) with a notification about new software update.

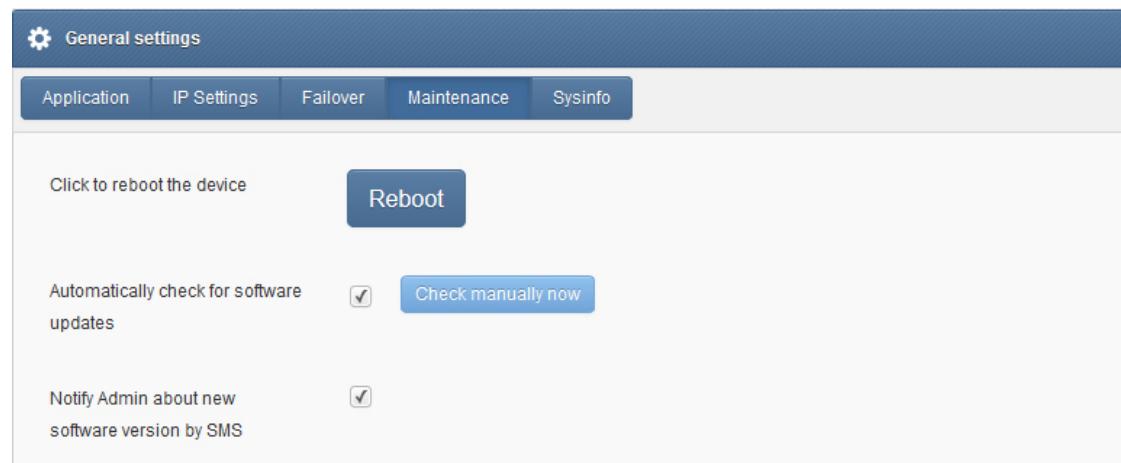

Screenshot from "General settings-Maintenance"

*Notice: Your SMSEagle device must have a HTTPS connectivity with address [www.smseagle.eu](http://www.smseagle.eu) in order for this feature to work.*


### 3. TROUBLESHOOTING

To make sure that the device is working properly, follow the three steps:

1. Verification of LEDs
2. Checking the device configuration (IP Settings)
3. Check the device logs (description below)

## Verification of LEDs

Normal operation of the device is signaled by LEDs as follows:

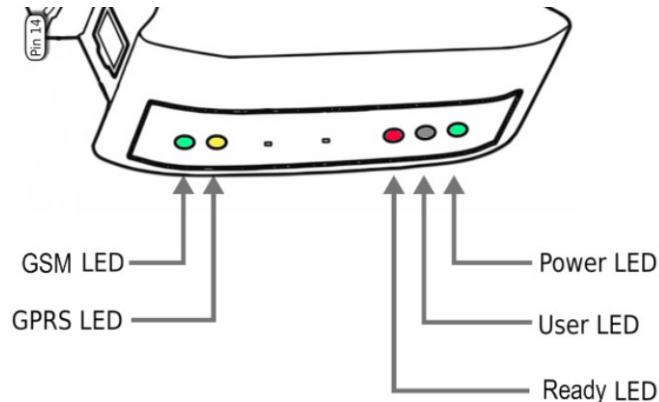

| LED                | Correct operation  |
|--------------------|--|
| <b>Power (PWR)</b> | Continuously lit   |
| <b>User</b>        | Disabled   |
| <b>Ready (RDY)</b> | Blinking   |
| <b>GSM</b>         | Slow flashing in stand-by mode, Quick flashing when modem in use |
| <b>GPRS</b>        | Not used   |

## Checking the device logs

SMSEagle operates on Linux system. Linux system log is available under menu position "Settings" > "Logs". In case of any problems with the device this log is a valuable source of troubleshooting information.

Please attach information from this log when contacting with SMSEagle Support Team.


## When the device is not reachable

1. Check if the device is correctly connected to the network. Check LED status of RJ45 socket.
2. In the case when the device does not respond due to a malfunction or incorrect user settings please reboot the device by disconnecting and connecting power source (or pressing Reset switch).
3. If you still cannot connect with the device, it is possible to restore to factory IP settings by using the SW button.

## Restoring factory defaults

This action restores the following settings to default values: **IP settings, database content.**

In order to restore factory defaults proceed with the following steps:
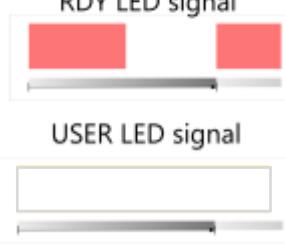
| LED signaling   | USER actions   | System reaction   |
|---|--|---|
|    | <p><b>When the device is ready to operate:</b></p> <p>When READY LED is blinking and USER LED is disabled (do not proceed if you don't have that state!)</p> |   |
|   | <ol style="list-style-type: none"><li><b>Press and hold SW button for 10 seconds</b></li></ol>   | Restore service is counting down.   |
|  | <ol style="list-style-type: none"><li><b>Release SW button after 10 seconds.</b></li></ol> <p>User LED will begin to blink.</p>                              | <p>System is reading factory defaults.</p> <p>Factory settings are being applied to the device.</p> |
|  | <ol style="list-style-type: none"><li><b>Wait until system reboots.</b></li></ol> <p>Default IP settings are restored.</p>                                   | System is going for a reboot.   |

*Please note, that after reboot the device will be finishing the process of factory reset, therefore it can take longer for the system to start.*

## 4. SERVICE AND REPAIR

## **Warranty**

Your SMSEagle comes with 14 days of post-sales technical support (including assistance in integration with external software) and one year of hardware repair warranty coverage. For a detailed information on warranty terms and conditions check warranty card that comes with your device or follow the link: [www.smseagle.eu/docs/general\\_warranty\\_terms\\_and\\_conditions.pdf](http://www.smseagle.eu/docs/general_warranty_terms_and_conditions.pdf)

## **Service**

Before contacting with support team, be sure that you have read Troubleshooting section of this manual. SMSEagle Support Team is available by email or telephone.

Support Email: [support@smseagle.eu](mailto:support@smseagle.eu)

Support telephone: + 48 61 6713 411

The support service is provided by:

Proximus Software  
ul. Piątkowska 163,  
60-650 Poznań, Poland

WHEN CONTACTING SUPPORT TEAM, BE PREPARED TO PROVIDE THE FOLLOWING INFORMATION:

### **System Information**

To get information about your SMSEagle, go to menu Settings > Maintenance. You will find there information about application and database version.

### **System Logs**

Go to menu Settings > Logs. If possible copy the log data and provide to support team when requested.

### **MAC address**

Each SMSEagle device has its unique MAC address. MAC address is printed on the device body.

## 5. TECH SPECS AND SAFETY INFORMATION

# Technical Specifications

## Hardware Specification

- Processor type: ARM9 32bit 200MIPS RISC
- Network interface: Ethernet 10/100 TX (1xRJ45)
- 1GB Flashdisk
- RTC Clock: RTC 240B SRAM, Watchdog timer
- Power consumption: max 17W
- Noise level: Fanless
- Dimensions: (width x depth x height) 35 x 120 x 101 mm
- Weight: 350g
- Casing: ABS, DIN rail installation
- Operating parameters:
  - Operating temperature: 10 ~ 60°C
  - Humidity: 5 ~ 95% RH (no condensation)
- Modem GSM/GPRS:
  - Waveband: GSM/GPRS/EGPRS 900/1800/1900 MHz
  - Compatible with GSM phase 2/2+.
  - Class 4 (2W @ 900 MHz).
  - Class 1 (1W @ 1800/1900 MHz).
- SIM card standard: mini
- Antenna connector: SMA

## Power Supply

AC line input

Voltage ranges: 100–240 V alternating current (AC)

Frequency: 50–60Hz single phase

## GSM Antenna

Omnidirectional 3.5dBi antenna with magnetic foot

Cable length 3m

## Sending/Receiving Throughput

- Incoming transmission rate: up to 30 SMS/min

- Outgoing transmission rate: up to 20 SMS/min
- API send SMS requests: 30 SMS/min (messages are queued for sending in a built-in database)

## Software Platform

- Operating system: Linux 2.6
- built-in Apache2 web server
- built-in PostgreSQL database server
- built-in Postfix email server
- modern responsive web interface
- watchdog mechanisms for GSM/3G modem

## Important Safety Information

This chapter provides important information about safety procedures. For your safety and that of your equipment, follow these rules for handling your device.

**WARNING:** Incorrect storage or use of your device may void the manufacturer's warranty. Failure to follow these safety instructions could result in fire, electric shock, or other injury or damage.

Always take the following precautions.

Disconnect the power plug from AC power source or if any of the following conditions exist:

- the power cord or plug becomes frayed or otherwise damaged
- you spill something into the case
- the device is exposed to rain or any other excess moisture
- the device has been dropped or the case has been otherwise damaged

Be sure about that the use of this product is allowed in your country and in the environment required. As with any other telecommunication equipment, the use of this product may be dangerous and has to be avoided in the following areas: where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc.; where there is risk of explosion such as gasoline stations, oil refineries, etc. It is responsibility of the user to enforce the country regulation and the specific environment regulation.

Do not disassemble the product; any mark of tampering will compromise the warranty validity.

Every device has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to be installed with the guarantee of a minimum 20 cm distance from the body. In case of this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

***DISCLAIMER: The manufacturer is not responsible for any damages caused by inappropriate installation, not maintaining the proper technical condition or using a product against its destination.***